


INTERIOR LED RECESSED DOWN SPOTLIGHT

L02093



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed | Slim Trim
- 400-600mm cable with quick connector
- COB LED | 2SDCM | CRI90 | UGR<16
- Flicker Free | Remote LED Driver version.
- 90°adjustable | 355°rotation | pull-out | 8-42°
- 0/1-10V | Triac | DALI Tunable white dimming

UNIFORM DISTRIBUTION

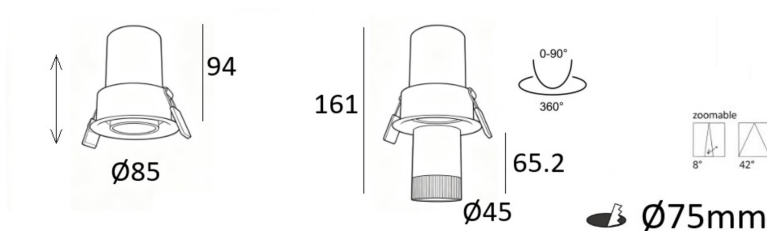

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L02093-7	7W	450lm	Ø 85xH94mm	Ø 75mm	150mA

FEATURES

Double adjustability tube pull-out spotlight and zoomable , uniform distribution . Visual comfort low glare optic , recessed light source. available for different output beams 8-42°. The decorative secondary optic available in multiple color finishing, Black | White . The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. Simple and flexible installation slim trim with spring, The spotlight is modular design. They comprise a LED light module and mounting frame. A small downlight characterized by innovative and surprising solutions. The rotation and the right angled inclination make this product to be highly flexible and easy to handle. It is ideal for lighting architectural and artistic details up. The body can either be completely hidden into the frame or fully visible to aim it wherever you want. Easy lighting demand, for a wide scale of projects, from hotels, retail , commercial areas and much more.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA	Hex Louver	ZOOMABLE 8° - 42°	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White Customized