


## INTERIOR LED RECESSED DOWN SPOTLIGHT

L02096



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed
- 400-600mm cable with quick connector
- COB LED | 2SDCM | CRI90 | UGR<16
- Flicker Free | Remote LED Driver version.
- 15° adjustable 360°rotation and zoomable 8-42°
- CASAMBI | 0/1-10V | Triac | DALI 2

### UNIFORM DISTRIBUTION

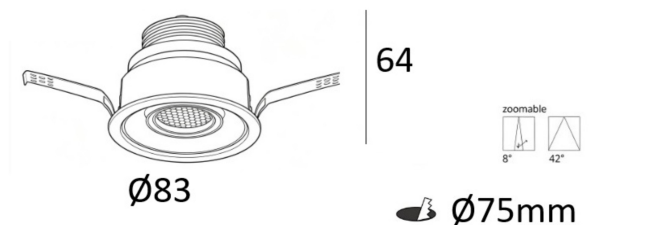

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L02096-9	9W	550lm	Ø83xH64mm	Ø75mm	250mA

### FEATURES

The spotlight achieved 15° adjustable 360°rotation and zoomable 8-42°, uniform distribution. Visual comfort low glare optic. With 5x focal length, the beam angle of the spotlight can be narrowed sharply. The rotation and right angled inclination and zoomable function make this product to be easy to handle and highly flexible. They comprise a LED light module, a metal mounting frame very easy installations. It facilitates the installation by giving the opportunity to the installer to place the mounting frame in advance. No need to worry for the lighting modules in further finishing of the room, as the spotlight modules can be clicked into the frame afterwards, and easy to take it off the mounting frame. Easy to handle. High-quality mixing effect achieved. White and bright to warm and dim, tunable white gives character to its environment. The light spot are remain the same while the color change, and there is almost no effect on the light spot. Color temperature changes can be controlled by either DIP switch or dimming system. Moreover, the IP54 rating means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations. The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. Compatible with wired and wireless dimming systems. 5-year warranty provided. The new creating that meets the needs of your residential and commercial projects. It is ideal for lighting architectural and artistic details up.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
9W 250mA	Hex Louver	ZOOMABLE 8° - 42°	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White Customized