




INTERIOR LED RECESSED DOWN SPOTLIGHT

L03004



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- COB LED 3SDCM CRI90+
- Flicker Free, Remote LED Driver version.
- 25°adjustable 355°rotation
- DALI 0/1-10V I Triac I DALI dimmable

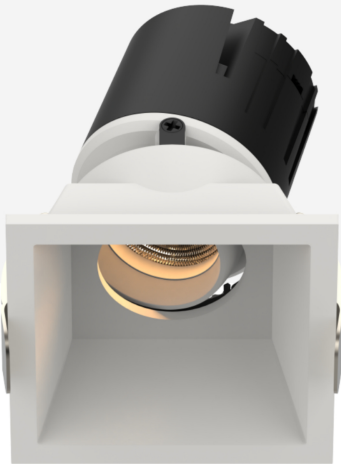












HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION



| Code       | System Power W | Output Lumen lm | Dimension mm  | Cut Hole mm | Power Supply mA |
|------------|----------------|-----------------|---------------|-------------|-----------------|
| L03004 -7  | 7W             | 500lm           | □ 65x65xH81mm | □ 55x55mm   | 150mA           |
| L03004 -12 | 12W            | 960lm           | □ 85x85xH91mm | □ 75x75mm   | 300mA           |

FEATURES

Slim trim spotlight 25°adjustable 355°rotation, High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. The spotlight offer homogeneous and uniform light distribution. Excellent colour rendering , it's perfect for a wide range of food, flowers, clothes, and in general for other display lighting applications. On the request it can be offered in any RAL colour, matching the specific look and feel of your design. Dimmable

| Remote LED Driver     | Accessoires   | Beam Angle  | Color Temperature   | Finishes   |
|-----------------------|---|---|---|--|
| 7W 150mA<br>12W 300mA | <br>Hex Louver |  10°<br> 15°<br> 24°<br> 36°<br> 55° |  2700K<br> 3000K<br> 4000K<br> 5000K<br> 6000K |  Black<br> White<br>Customized |