

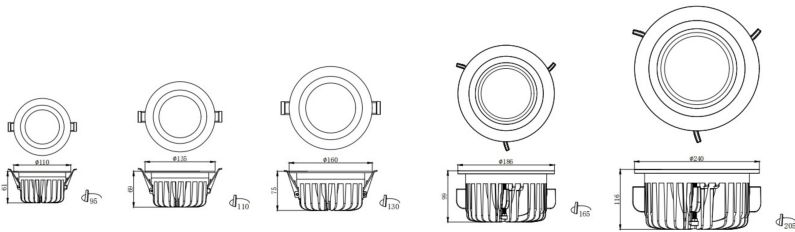
INTERIOR LED RECESSED DOWNLIGHT

L03016



- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling wall recessed I Trim
- 400-600mm cable with quick connector
- Citizen COB LED 3SDCM CRI90 I Osram SMD
- Flicker Free I Remote LED Driver version.
- Recessed light source I High level of visual comfort
- 0/1-10V I Triac I DALI dimming

VISUAL COMFORT AND UNIFORM DISTRIBUTION

					
Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03016 -10	10W	900lm	Ø 110xH61mm	Ø 95mm	250mA
L03016 -15	15W	1350lm	Ø 135xH60mm	Ø 110mm	350mA
L03016 -25	25W	2300lm	Ø 160xH75mm	Ø 130mm	600mA
L03016 -40	40W	3600lm	Ø 186xH99mm	Ø 165mm	1000mA
L03016 -55	55W	5000lm	Ø 240xH116mm	Ø 205mm	1300mA

FEATURES

The fixing downlight offer uniform distribution . 55° COB LED and reflector optic, I 110° OSRAM SMD , Visual comfort , The basic model comes in white or black color. Customized color finishing, power changes are possible depending on the request and the quantity. Simple installation with metal springs. Easy lighting demand, for a wide scala of projects, from hotels, retail , commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product. IP RATED, it can be used in bathroom or other damp locations.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
10W 250mA 15W 350mA 25W 600mA 40W 1000mA 55W 1300mA		55° 110°	2700K 3000K 4000K 5000K 6000K	Black White Customized