



INTERIOR LED RECESSED DOWN SPOTLIGHT

L03110

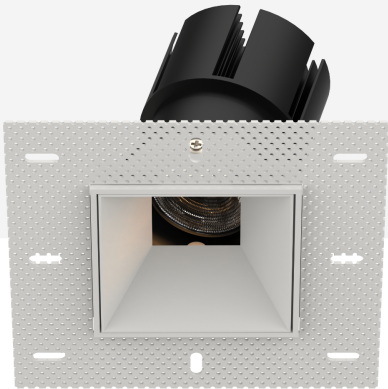

- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- Famous brand COB LED 3SDCM CRI90
- Flicker Free, Remote LED Driver version.
- Recessed light source , eyes friendly
- 0/1-10V I Triac I DALI Tunable white dimming


VISUAL COMFORT AND UNIFORM DISTRIBUTION



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03110 -7	7W	560lm	□ 136x136xH107mm	□ 75x75mm	150mA
L03110 -12	12W	960lm	□ 136x136xH107mm	□ 75x75mm	300mA
L03110 -20	20W	1650lm	□ 136x136xH147mm	□ 75x75mm	500mA

FEATURES

Adjustable spotlight, recessed light source. visual comfort. They comprise a LED light module, a metal baffle and a metal mounting frame. Easy installations. it facilitates the installation by giving the opportunity to the installer to place the mounting frame in advance. No need to worry for the lighting modules in further finishing of the room, as the spotlight modules can be clicked into the frame afterwards, and easy to take it off the mounting frame, the new creating that meets the needs of your residential and commercial projects. The spotlight offer homogeneous and uniform light distribution. Dimmable. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. 5years warranty. Customized color finishing, power changes are possible depending on the request and the quantity. The metal baffle is available in multiple color finishing, Black I White as standard.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA 12W 300mA 20W 500mA	 Hex Louver	15° 24° 36° 55°	2700K 3000K 4000K 5000K 6000K	Black White Customized