


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03112



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium materials lighting fixture, powder coated.
- Ceiling Recessed | Trimless | Fixed
- 300-400mm cable with quick connector.
- COB LED CRI90 3SDCM
- Flicker Free | Remote LED Driver version.
- Deeply recessed light source. High level of visual comfort
- DALI | Triac | 0/1-10V | DTW dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

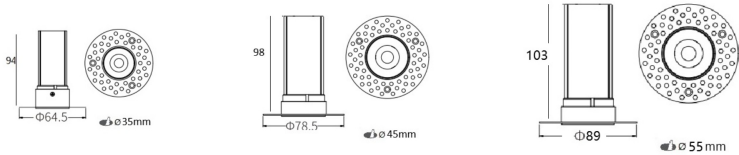

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03112 -5	5W	350lm	Ø 65xH93mm	Ø 35mm	130mA
L03112 -7	7W	500lm	Ø 79xH98mm	Ø 45mm	150mA
L03112 -12	12W	900lm	Ø 89xH103mm	Ø 55mm	280mA

FEATURES

Luminaires in this line have modular design. Fixed Trimless spotlight, visual comfort, recessed light source, deep cut-off angle 45°. They comprise a LED light module, a metal baffle and a metal mounting frame. Easy installations. It facilitates the installation by giving the opportunity to the installer to place the metal frame in advance. No need to worry for the lighting modules in further finishing of the room, as the spotlight modules can be clicked into the frame afterwards. Matched invisible transition between the fixture and the ceiling. The spotlight offer homogeneous and uniform light distribution and meets the needs of your residential and commercial projects. Specialized optics and optical filters can be ordered. Achieve a pleasing and soft effect of the wall washing spot. Dimmable. 5 years warranty. Customized color finishing, power changes are possible depending on the request and the quantity.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
5W 130mA	Gold	15°	2700K	Black
7W 150mA	Pink	24°	3000K	White
12W 280mA	White	36°	4000K	Customized
	Black		5000K	
	Honeycomb		6000K	











