












INTERIOR LED RECESSED DOWN SPOTLIGHT

L03214



-  IP54
-  CLASS III
-  Europe Standard & CE Certificate. 220-240V 50/60Hz
-  Aluminium material and powder coating.
-  Ceiling recessed, Trimless
-  5years warranty
-  COB LED 3SDCM CRI90
-  Flicker Free, Remote LED Driver version. PF0.95
-  Recessed light source. High level of visual comfort.
-  0/1-10V I Triac I DALI Tunable white dimming.

UNIFORM DISTRIBUTION AND SOFT LIGHT

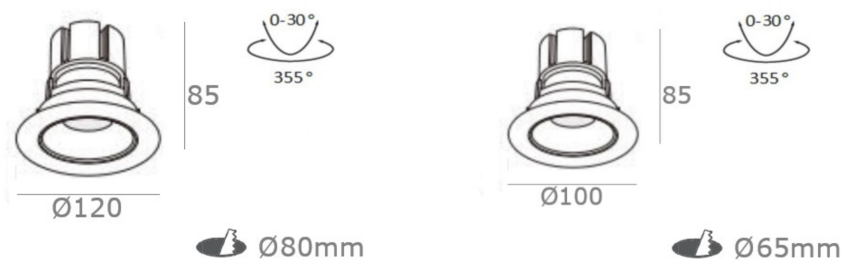

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03214 -7	7W	756lm	Ø 65xH85mm	Ø 65mm	150mA
L03214 -12	12W	1212lm	Ø 80xH85mm	Ø 80mm	300mA
L03214 -14	14W	1120lm	Ø 80xH85mm	Ø 80mm	350mA

FEATURES

Adjustable trimless spotlight, LED modular design, comprise a LED light module, a metal baffle and a metal mounting frame. One housing, multiple options, with different light distributions for a wide variety of applications. Easy installations. Visual comfort low glare optic with recessed light source. High Definition optical lenses in thermoplastic material. it's easy to take the spotlight out from it's frame, Customized color finishing, power changes are possible depending on the request and the quantity. Dimmable.

Remote LED Driver





7W 150mA
12W 300mA
14W 350mA

Accessoires



Hex Louver

Beam Angle

-  15°
-  24°
-  36°
-  55°

Color Temperature

-  2700K
-  3000K
-  4000K
-  5000K
-  6000K

Finishes

-  Black
-  White
-  Customized