


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03214



- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting and powder coating.
- Ceiling recessed, Plaster -in. Trimless
- 5years Warranty
- COB LED 3SDCM CRI90
- Flicker Free, Remote LED Driver version. PF0.95
- UGR <19 Deeply recessed light source. Visual comfort.
- DALI Dimming from 0~100%, down to 0.01%.

UNIFORM DISTRIBUTION AND SOFT LIGHT

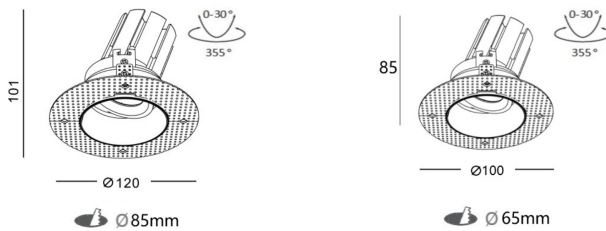

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03214 -7	7W	650lm	Ø 100xH85mm	Ø 65mm	150mA
L03214 -12	12W	1100lm	Ø 120xH110mm	Ø 85mm	300mA
L03214 -15	15W	1350lm	Ø 120xH110mm	Ø 85mm	350mA

FEATURES

Adjustable spotlight, trimless, visual comfort, recessed light source. They comprise a LED light module, a metal baffle and a metal mounting frame. Easy installations. It facilitates the installation by giving the opportunity to the installer to place the mounting frame in advance. No need to worry for the lighting modules in further finishing of the room, as the spotlight modules can be clicked into the frame afterwards easy to handle. One housing achieved multiple options and different light distributions for a wide variety of applications. The spotlight offers homogeneous and uniform light distribution. Specialized optics and optical filters can be ordered. Flicker-Free. Dimmable. High-quality mixing effect achieved. White and bright to warm and dim, tunable white gives character to its environment. The light spot remains the same while the color changes, and there is almost no effect on the light spot. The edge is cut off, the outline of the time spot range is clearly visible when washing the wall, and the interior is uniformly transitioned. Achieve a pleasing and soft effect of the wall washing spot. Dimming from 0~100%, down to 0.01%. 5years warranty. Customized color finishing, power changes are possible depending on the request and the quantity. Ø85 | IP54

Remote LED Driver	Accessories	Beam Angle	Color Temperature	Finishes
7W 150mA 12W 300mA 15W 350mA	Hex Louver	15° 24° 36° 55°	2700K 3000K 4000K 5000K 6000K	Black White Customized