


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03216



- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium material and powder coating.
- Ceiling recessed, Triple Trimless
- 5years warranty
- CREE COB LED 3SDCM CRI90
- Flicker Free, Remote LED Driver version. PF0.95
- UGR<18
- 0/1-10V I Triac I DALI Tunable white dimming.

UNIFORM DISTRIBUTION AND SOFT LIGHT

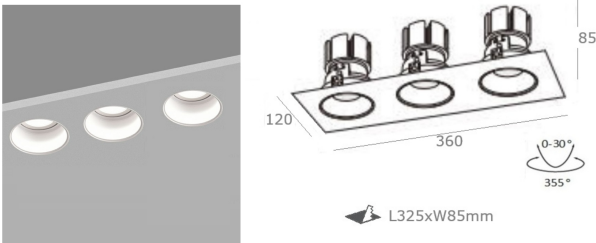

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03216 -7	3x7W	2100lm	□ L360xW120xH85mm	□ 325x85mm	150mA
L03216 -12	3x12W	3600lm	□ L360xW120xH95mm	□ 325x85mm	250mA

FEATURES

Adjustable triple spotlight, LED modular design, comprise a LED light module, a metal baffle and a metal mounting frame. One housing, multiple options, with different light distributions for a wide variety of applications. Easy installations. Visual comfort low glare optic with recessed light source. High Definition optical lenses in thermoplastic material. it's easy to take the spotlight out from it's frame, Customized color finishing, power changes are possible depending on the request and the quantity. Dimmable

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA 12W 250mA	 Hex Louver	□ 15° ▲ 24° ▲ 38° ▲ 55°	□ 2700K □ 3000K □ 4000K □ 5000K □ 6000K	■ Black □ White Customized