


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03223



- IP44
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- Famous brand COB LED 3SDCM CRI90
- Flicker Free, Remote LED Driver version.
- Recessed light source , eyes friendly
- 0/1-10V I Triac I DALI Tunable white dimming

VISUAL COMFORT AND UNIFORM DISTRIBUTION

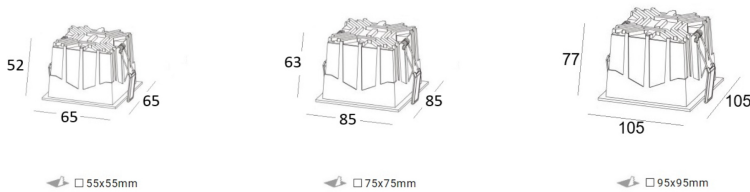

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03223 -7	7W	560lm	□ 65x65xH52mm	□ 55x55mm	150mA
L03223 -12	12W	960lm	□ 85x85xH63mm	□ 75x75mm	300mA
L03223 -20	20W	1650lm	□ 105x105xH77mm	□ 95x95mm	500mA

FEATURES

Fixing spotlight, recessed light source. One housing achieved multiple options and different light distributions for a wide variety of applications, the new creating that meets the needs of your residential and commercial projects. The spotlight offer homogeneous and uniform light distribution. DALI Dimming from 0~100%, down to 0.01%. Recessed light source. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. 5years warranty. Customized color finishing, power changes are possible depending on the request and the quantity. The metal baffle is available in multiple color finishing, Black I White I Silver.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA 12W 300mA 20W 500mA	Hex Louver	15° 24° 36°	2700K 3000K 4000K 5000K 6000K	Black White Customized