



INTERIOR LED RECESSED DOWN SPOTLIGHT

L03229

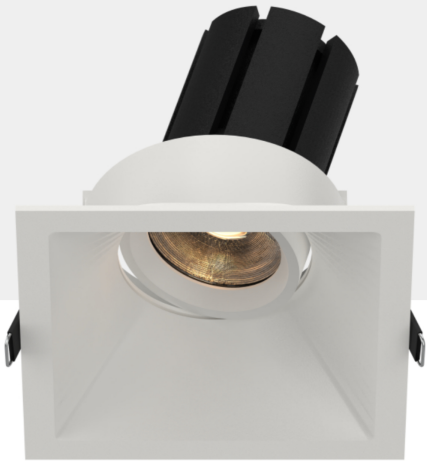

- IP44
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- COB LED 3SDCM CRI90+
- Flicker Free, Remote LED Driver version.
- 95x95mm
- 0/1-10V | Triac | DALI Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

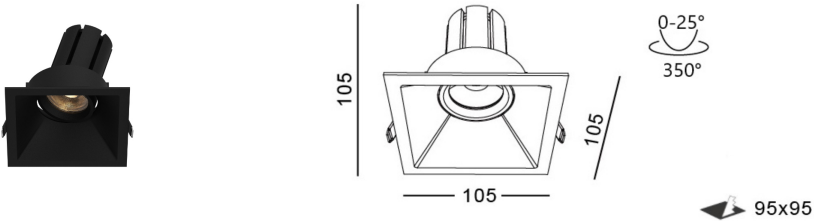

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03229 -7	7W	650lm	□ 105x105xH105mm	□ 95x95mm	150mA
L03229 -12	12W	1150lm	□ 105x105xH105mm	□ 95x95mm	300mA
L03229 -15	15W	1400lm	□ 105x105xH105mm	□ 95x95mm	350mA

FEATURES

The spotlight comprise a LED light module(A4445) and a metal mounting frame. The spotlight achieved 25°adjustable 355°rotation, High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. The spotlight offer homogeneous and uniform light distribution. Excellent colour rendering , it's perfect for a wide range of food, flowers, clothes, and in general for other display lighting applications. On the request it can be offered in any RAL colour, matching the specific look and feel of your design. IP44 (customized IP54)rating on same one luminaries means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations. Moreover, the spotlight is compatible with LED light module (A4445TW), high-quality mixing effect achieved. White and bright to warm and dim, tunable white gives character to it's environment. The light spot are remain the same while the color change, and there is almost no effect on the light spot. The edge is cut off, the outline of the time spot range is clearly visible when washing the wall, and the interior is uniformly transitioned. Achieve a pleasing and soft effect of the wall washing spot. Dimming from 0~100%, down to 0.01%.

Remote LED Driver

7W 150mA
12W 300mA
15W 350mA

Accessoires



Hex Louver

Beam Angle

- 15°
- 24°
- 36°
- 55°

Color Temperature

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

Finishes

- Black
- White
- Customized