



INTERIOR LED RECESSED DOWN SPOTLIGHT

L03237

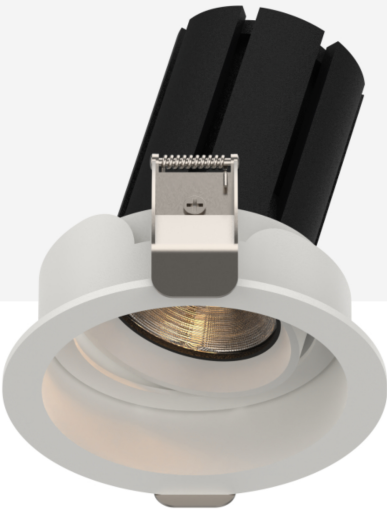

- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- CREE branded COB LED 3SDCM CRI90+
- Ø75mm
- Remote LED Driver
- 0/1-10V I Triac I DALI Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

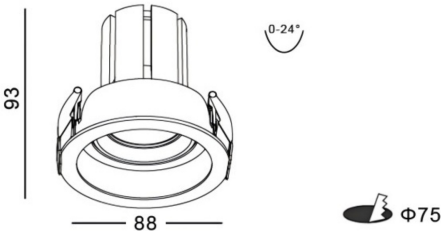

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03237 -7	7W	650lm	Ø 88xH70mm	Ø 75mm	150mA
L03237 -12	12W	1150lm	Ø 88xH93mm	Ø 75mm	300mA

FEATURES

Aluminium die-casting material and powder coating. Remote LED driver version. The spotlight comprise a LED light module(A4445) and a metal mounting frame. The spotlight achieved 25°adjustable 355°rotation, Its principle is equivalent to modularity and flexibility at its best. it also facilitates the installation by giving the opportunity to the installer to place the metal frame in advance. No need to worry for the lighting modules in further finishing of the room, as the modules can be clicked into the frame afterwards. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. Homogeneous and uniform light distribution. Excellent colour rendering , it's perfect for a wide range of food, flowers, clothes, and in general for other display lighting applications. The standard product comes in RAL 9005 Black I RAL 9016 White, On the request it can be offered in any RAL colour, matching the specific look and feel of your design. IP44 (customized IP54)rating on same one luminaries means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA 12W 300mA	 Hex Louver	 10° 15° 24° 36° 55°	 2700K 3000K 4000K 5000K 6000K	 Black White Customized