



INTERIOR LED RECESSED DOWN SPOTLIGHT

L03241



- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- COB LED 3SDCM CRI90+
- Flicker Free, Remote LED Driver version.
- 160x85mm
- 0/1-10V I Triac I DALI dimmable

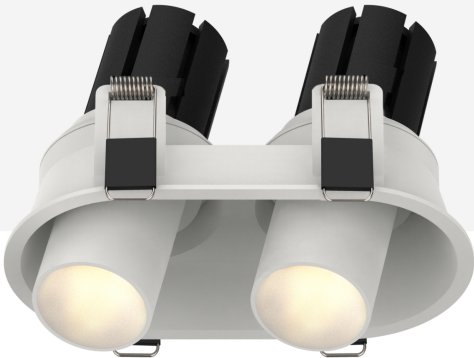

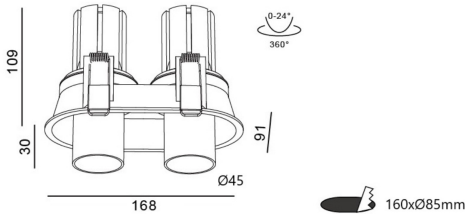










HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03241 -7	2x7W	1000lm	□ 168x91xH109mm	□ 160x85mm	150mA
L03241 -12	2x12W	1600lm	□ 168x91xH109mm	□ 160x85mm	300mA

FEATURES

Double spotlight, it comprise a LED light module(A4445) and a metal mounting frame. The spotlight achieved 25°adjustable 355°rotation, High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. The spotlight offer homogeneous and uniform light distribution. Excellent colour rendering , it's perfect for a wide range of food, flowers, clothes, and in general for other display lighting applications. On the request it can be offered in any RAL colour, matching the specific look and feel of your design. DALI Dimming from 0~100%, down to 0.01%.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA 12W 300mA	 Hex Louver	 10°  15°  24°  36°  55°	 2700K  3000K  4000K  5000K  6000K	 Black  White Customized