


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03242



-  IP54
-  CLASS III
-  Europe Standard & CE Certificate. 220-240V 50/60Hz
-  Aluminium die casting material and powder coating
-  Ceiling recessed, Ceiling thickness 3-25mm
-  400-600mm cable with quick connector
-  Famous brand COB LED 3SDCM CRI90
-  Ø65mm
-  Recessed light source , eyes friendly
-  0/1-10V I Triac I DALI Tunable white dimming

UNIFORM DISTRIBUTION | HIGH EFFICIENCY

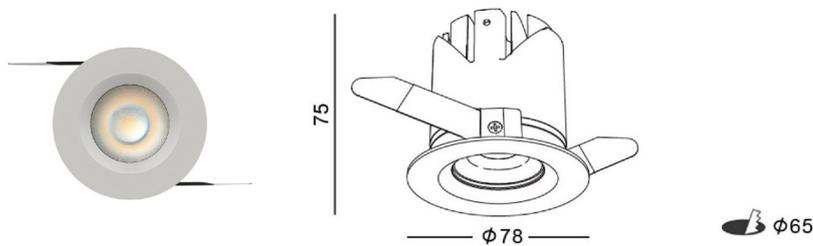

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03242 -7	7W	650lm	Ø78xH75mm	Ø65mm	200mA
L03242 -12	12W	1100lm	Ø78xH75mm	Ø65mm	300mA
L03242 -15	15W	1400lm	Ø78xH75mm	Ø65mm	350mA

FEATURES

Fixed spotlight , recessed light source. One housing achieved multiple options and different light distributions for a wide variety of applications, it meets the needs of your residential and commercial projects. The spotlight offer homogeneous and uniform light distribution. High-quality mixing effect achieved. Dimming from 0~100%, down to 0.01%. High Definition optical lenses in thermoplastic material Ø45mm. Specialized optics and optical filters can be ordered. The standard product comes in RAL 9005 Black I RAL 9016 White. Customized color finishing, power changes are possible depending on the request and the quantity. IP54 It means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations.

Remote LED Driver

7W 200mA
12W 300mA
15W 350mA

Accessories



Beam Angle

-  15°
-  24°
-  36°
-  55°

Color Temperature

-  2700K
-  3000K
-  4000K
-  5000K
-  6000K

Finishes

-  Black
-  White
-  Customized