


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03249



- IP54
- CLASS III
- CE Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- Famous brand COB LED 3SDCM CRI90+
- Flicker Free, Remote LED Driver version.
- Recessed light source , eyes friendly
- 0/1 -10V I Triac I DALI Tunable white dimming

VISUAL COMFORT AND UNIFORM DISTRIBUTION

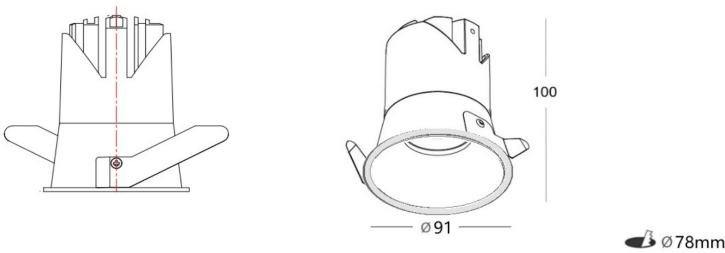

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03249 -12	12W	1100lm	Ø 91xH100mm	Ø 78mm	300mA
L03249 -15	15W	1350lm	Ø 91xH100mm	Ø 78mm	350mA

FEATURES

Luminaires in this line have modular design. They comprise a LED light module and a frame. One housing achieved multiple options and different light distributions for a wide variety of applications, the new creating that meets the needs of your residential and commercial projects. Easy installations. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. 5years warranty. Flicker-Free. Dimmable. Customized color finishing, power changes are possible depending on the request and the quantity. Moreover, the IP54 means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations.

Remote LED Driver

12W 300mA
15W 350mA

Accessoires



Beam Angle

- 15°
- 24°
- 36°
- 55°

Color Temperature

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

Finishes

- Black
- White
- Customized