


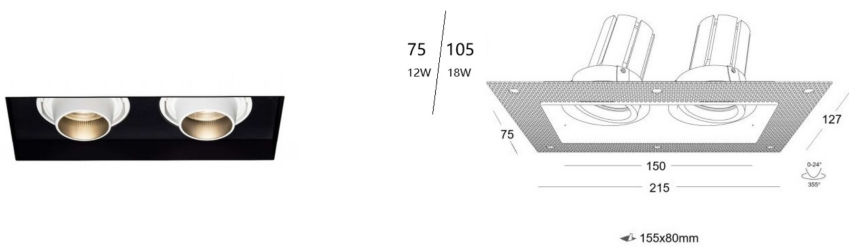
INTERIOR LED RECESSED DOWN SPOTLIGHT

L03251



-  IP54
-  CLASS III
-  Europe Standard & CE Certificate. 220-240V 50/60Hz
-  Aluminium die casting and powder coating.
-  Ceiling recessed | Double Trimless
-  5years Warranty
-  CREE COB LED 3SDCM CRI90
-  Flicker Free, Remote LED Driver version.
-  Deeply recessed light source. Visual comfort.
-  DALI Dimming from 0~100%, down to 0.01%.

UNIFORM DISTRIBUTION AND SOFT LIGHT



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03251 -12	2x12W	1680lm	□ 215x127xH75mm	□ 155x80mm	300mA
L03251 -18	2x18W	2520lm	□ 215x127xH105mm	□ 155x80mm	450mA

FEATURES

Luminaires in this line have modular design. They comprise a LED light module, a metal baffle and a metal mounting frame. One housing achieved multiple options and different light distributions for a wide variety of applications, the new creating that meets the needs of your residential and commercial projects. The spotlight offer homogeneous and uniform light distribution. deep cut-off angle 45°. easy installations. deeply recessed light source. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. 5years warranty. Flicker -Free. Dimmable. Customized color finishing, power changes are possible depending on the request and the quantity. Moreover, IP54 means that they can be used even in bathroom or other damp indoor locations.





Remote LED Driver

12W 300mA
18W 450mA

Accessoires



Beam Angle

-  15°
-  24°
-  36°
-  55°

Color Temperature

-  2700K
-  3000K
-  4000K
-  5000K
-  6000K

Finishes

-  Black
-  White
-  Customized