


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03253



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- Famous brand COB LED 3SDCM CRI90+
- Flicker Free, Remote LED Driver version.
- Recessed light source , eyes friendly
- 0/1-10V I Triac I DALI Tunable white dimming

VISUAL COMFORT AND UNIFORM DISTRIBUTION

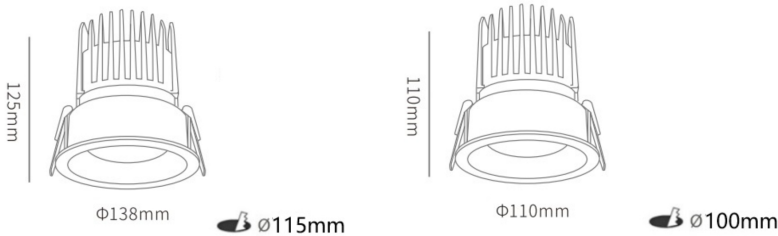

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03253 -20	12W	2400lm	Ø 110xH110mm	Ø 100mm	500mA
L03253 -25	15W	2500lm	Ø 138xH125mm	Ø 115mm	650mA
L03253 -30	14W	3000lm	Ø 138xH125mm	Ø 115mm	750mA

FEATURES

Fixed spotlight visual comfort , recessed light source. One housing achieved multiple options and different light distributions for a wide varirty of applications, the new creating that meets the needs of your residential and commercial projects. The spotlight offer homogeneous and uniform light distribution. High-quality mixing effect achieved. Dimming from 0~100%, down to 0.01%. Recessed light source. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. 5years warranty. Customized color finishing, power changes are possible depending on the request and the quantity. The metal baffle is available in multiple color finishing, Black I White I Gold.

Remote LED Driver

- 12W 500mA
- 15W 650mA
- 14W 750mA

Accessoires



Hex Louver

Beam Angle

- 15°
- 24°
- 36°
- 55°

Color Temperature

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

Finishes

- Black
- White
- Customized