


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03267



- IP40
- CLASS III
- CE Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed, Ceiling thickness 3-25mm
- 400-600mm cable with quick connector
- Famous brand COB LED 3SDCM CRI90
- Flicker Free, Remote LED Driver version.
- Recessed light source , eyes friendly
- 0/1-10V I Triac I DALI Tunable white dimming



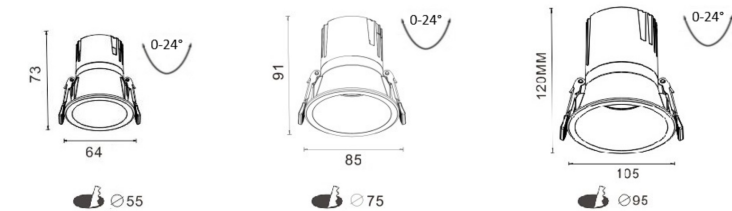









VISUAL COMFORT AND UNIFORM DISTRIBUTION



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03267 -7	7W	600lm	Ø 64xH73mm	Ø 55mm	160mA
L03267 -12	12W	1080lm	Ø 85xH91mm	Ø 75mm	300mA
L03267 -20	20W	1800lm	Ø 105xH120mm	Ø 95mm	500mA

FEATURES

Adjustable spotlight, super narrow trim, visual comfort, recessed light source. One housing achieved multiple options and different light distributions for a wide variety of applications, the new creating that meets the needs of your residential and commercial projects. The spotlight offer homogeneous and uniform light distribution. High-quality mixing effect achieved. White and bright to warm and dim, tunable white gives character to it's environment. The light spot are remain the same while the color change, and there is almost no effect on the light spot. The edge is cut off, the outline of the time spot range is clearly visible when washing the wall, and the interior is uniformly transitioned. Achieve a pleasing and soft effect of the wall washing spot. Dimming from 0~100%, down to 0.01%. Recessed light source. High Definition optical lenses in thermoplastic material. Specialized optics and optical filters can be ordered. 5years warranty. Customized color finishing, power changes are possible depending on the request and the quantity. The metal baffle is available in multiple color finishing, Black I White .

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 160mA 12W 300mA 20W 500mA	 Hex Louver	 15°  24°  36°  55°	 2700K  3000K  4000K  5000K  6000K	 Black  White Customized