


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03309



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- 30°adjustable 355°rotation.
- Ceiling Recessed.
- Aluminium lighting fixture, powder coated.
- COB LED CRI90+ 3SDCM
- Flicker Free I Deeply recessed light source.
- Remote LED Driver
- DALI I Triac I 0/1-10V I CASAMBI I DT8

UNIFORM DISTRIBUTION

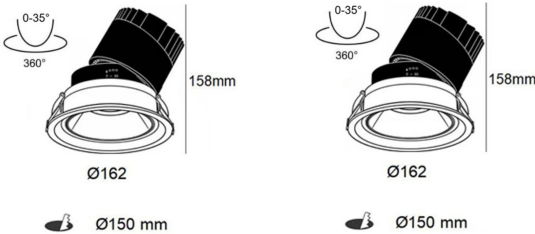

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03309 -25	25W	2000lm	Ø 162xH158mm	Ø 150mm	650mA
L03309 -30	30W	2400lm	Ø 162xH158mm	Ø 150mm	750mA

FEATURES

Aluminium material and powder coating. Remote LED driver version. Dark light technology, High level of visual comfort. They comprise a LED light module, a plastic material secondary reflector and a metal mounting frame. the reflector is available in multiple color finishing. The lighting fixture matched 30° adjustable and 355° rotation, Easy installations. it facilitates the installation by giving the opportunity to the installer to place the mounting frame in advance. No need to worry for the lighting modules in further finishing of the room, as the spotlight modules can be clicked into the mounting frame afterwards, and easy to take it off the mounting frame. The possibility to take the spotlight out from its mounting frame, adjustable and the right angled inclination make this product to be highly flexible and easy to handle. The spotlight offer homogeneous and uniform light distribution, available for four different output beams 15/24/36/50°. Specialized optics and optical filters can be ordered. Dimmable. 5years warranty. Customized color finishing, power changes are possible depending on the request and the quantity. The new creating that meets the needs of your residential and commercial projects.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
25W 650mA 30W 750mA	 Hex Louver	 15°  24°  36°  50°	 2700K  3000K  4000K  5000K  6000K	 Black  White Customized