



INTERIOR LED RECESSED DOWN SPOTLIGHT

L03310

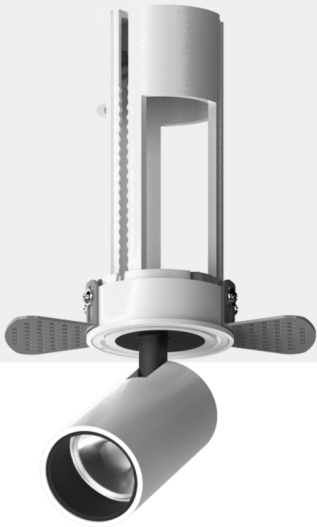

- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling recessed | Trimless
- 400-600mm cable with quick connector
- COB LED | 3SDCM | CRI90 | UGR<16
- Flicker Free | Remote LED Driver version.
- 90°adjustable 355°rotation | pull-out
- 0/1-10V | Triac | DALI Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03310-6	6W	550lm	Ø 107xH117mm	Ø 56mm	150mA

FEATURES

Aluminium die casting material and powder coating. Remote LED driver version. High level of visual comfort. 90°adjustable 355°rotation, pull-out. Double adjustability tube pull-out spotlight , uniform distribution . Visual comfort low glare optic , recessed light source. available for different output beams 15/24/36/50°. Specialized optical filters honeycomb can be ordered. The decorative secondary optic available in multiple color finishing, Black | White . The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. Simple and flexible installation trimless or with spring, The spotlight is modular design. They comprise a LED light module and a metal+ABS materials mounting frame. A small downlight characterized by innovative and surprising solutions. The the spotlight module can be installed into its frame by pushing, and push it again to take it off the frame. then possibility to take the spotlight out from its frame , the rotation and the right angled inclination make this product to be highly flexible and easy to handle.It is ideal for lighting architectural and artistic details up. The body can either be completely hidden into the ceiling or fully visible to aim it wherever you want. Realize superior lighting space with a deep cut-off angle. Easy lighting demand, for a wide scala of projects, from hotels, retail , commercial areas and much more.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
6W 150mA	 Hex Louver	 15°  24°  36°  50°	 2700K  3000K  4000K  5000K  6000K	 Black  White Customized