


## INTERIOR LED RECESSED DOWN SPOTLIGHT

L03342



- IP40
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- 90° vertical tilting, 360° horizontal rotation and pull-out
- Ceiling Recessed.
- Aluminium die-casting lighting fixture, powder coated.
- CREE branded COB LED CRI90+ 3SDCM
- Flicker Free | Deeply recessed light source.
- Remote LED Driver
- DALI | Triac | 0/1-10V | CASAMBI | DT8

### HIGHLY FLEXIBLE AND UNIFORM DISTRIBUTION

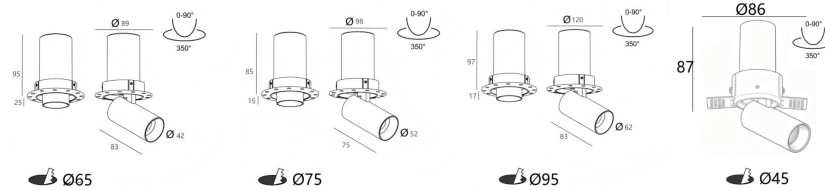

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03342-15	15W	1350lm	Ø 120xH112mm	Ø 95mm	350mA
L03342-7	7W	700lm	Ø 89xH110mm	Ø 65mm	150mA
L03342-10	10W	900lm	Ø 98xH102mm	Ø 75mm	250mA
L03342-5	5W	400lm	Ø 86xH87mm	Ø 45mm	130mA

### FEATURES

Double adjustability, 90° vertical tilting and 360° horizontal rotation and pull-out spotlight, Visual comfort low glare optic, recessed light source. available for four different output beams 15/24/36/50°. They comprise a LED light module, a metal baffle and a metal mounting frame. Easy installations. It facilitates the installation by giving the opportunity to the installer to place the mounting frame in advance. No need to worry for the lighting modules in further finishing of the room, as the spotlight modules can be clicked into the frame afterwards, and easy to take it off the mounting frame. Easy to handle. The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. Simple installation with spring, A small downlight characterized by innovative and surprising solutions. The rotation and the right angled inclination make this product to be highly flexible and easy to handle. It is ideal for lighting architectural and artistic details up. High Definition optical lenses in thermoplastic material, uniform distribution. Famous brand LED chips CRI90+ 3steps. Smart lighting, achieved CASAMBI | DALI DT8 dimmable. Easy lighting demand, for a wide scale of projects, from hotels, retail, commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
15W 350mA 7W 150mA 10W 250mA 5W 130mA	Hex Louver	15° 24° 36° 50°	2700K 3000K 4000K 5000K 6000K	Black White Customized