











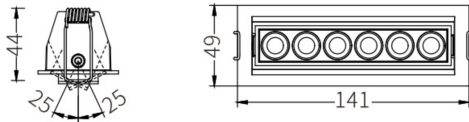
INTERIOR LED RECESSED DOWN SPOTLIGHT


L03372



-  IP20
-  CLASS III
-  CEILING RECESSED
-  400-600mm cable with quick connector.
-  136x43 mm
-  Eyes friendly CE certificate RoHS standard
-  CRI90+ Bridgelux branded SMD
-  DALI Triac I 0/1-10V I DALI dimmable
-  Tunable White dimming
-  Warranty 5 Years

UNIFORM DISTRIBUTION










 136x43mm

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03372 -10	6x2W	800lm	□ 141x49xH44mm	□ 136x43mm	600mA

FEATURES

Aluminium die-casting material and powder coating. -Remote LED driver version. Flicker-Free. Adjustable slim trim spotlight, an ideal accent lighting in residential or commercial areas. It comprises a LED spotlight module, a ABS baffle and a metal mounting frame. One housing, multiple options, with different light distributions for a wide variety of applications. Easy installations. Visual comfort low glare optic with deeply recessed light source. UGR<19. High Definition optics. -Uniform distribution. Easy installation. 6LEDs, 18V, CRI90 10W White | Black color finishing as standard. Customized color finishing, power changes are possible depending on the request and the quantity.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
2W 600mA		 24°  36°	 2700K  3000K  4000K  5000K  6000K	 Black  White Customized