





INTERIOR LED RECESSED DOWN SPOTLIGHT

L03533

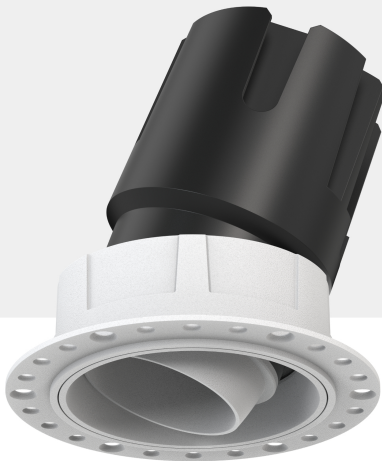

- IP44
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- 35°adjustable and 355°rotation.Same appearance both Fixed and Adjustable
- Ceiling Recessed. Trimless
- Aluminum die casting lighting fixture, powder coated.
- COB LED CRI90+ 3SDCM
- Flicker Free I Deeply recessed light source.
- Remote LED Driver
- DALI I Triac I 0/1-10V I CASAMBI I DT8

HIGHLY FLEXIBLE AND UNIFORM DISTRIBUTION



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03533 -10	10W	800lm	Ø 75xH50mm	Ø 55mm	250mA
L03533 -20	20W	1600lm	Ø 95xH100mm	Ø 75mm	500mA
L03533 -35	35W	2800lm	Ø 115xH120mm	Ø 95mm	850mA

FEATURES

Trimless installation I double adjustability 35°adjustable 355°rotation, Visual comfort low glare optic with recessed light source. Available for four different output beams 15/24/36/55°. They comprise a LED light module, a metal baffle and a metal mounting frame. Easy installations. it facilitates the installation by giving the opportunity to the installer to place the mounting frame in advance. No need to worry for the lighting modules in further finishing of the room, as the spotlight modules can be clicked into the frame afterwards, and easy to take it off the mounting frame. Easy to handle. The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. The rotation and the right angled inclination make this product to be highly flexible and easy to handle.It is ideal for lighting architectural and artistic details up. An ideal engineering lighting solution for the mid-to-high-end market. The spotlight is presented to its customers as a clean and non-dazzling product. Compatible with wired and wireless dimming systems. 5-year warranty provided.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
10W 250mA 20W 500mA 35W 850mA	 Hex Louver	 15°  24°  36°  55°	 2700K  3000K  4000K  5000K  6000K	 Black  White Customized