


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03693



- IP40
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- 30° vertical tilting, 355° horizontal rotation
- Ceiling Recessed.
- Aluminium die-casting lighting fixture, powder coated.
- CREE branded COB LED CRI90+ 3SDCM
- Flicker Free | Deeply recessed light source.
- Remote LED Driver
- DALI | Triac | 0/1-10V | CASAMBI | DT8

HIGHLY FLEXIBLE AND UNIFORM DISTRIBUTION

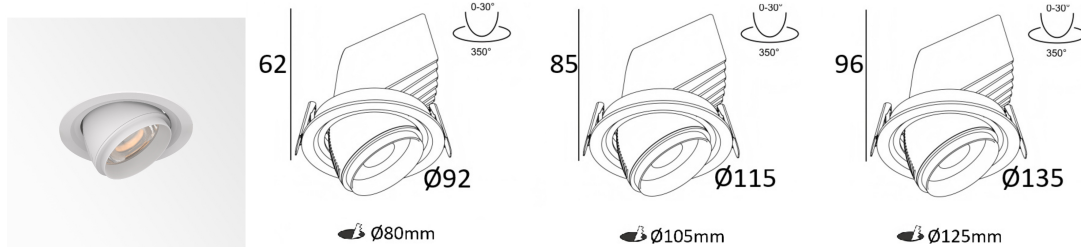

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03693-15	15W	1500lm	Ø92xH62mm	Ø75mm	350mA
L03693-30	30W	3000lm	Ø115xH85mm	Ø95mm	750mA
L03693-35	35W	3300lm	Ø135xH95mm	Ø110mm	800mA
L03693-25	25W	2500lm	Ø115xH85mm	Ø95mm	550mA

FEATURES

Aluminium die casting material and powder coating. Remote LED driver version. 30°adjustable 355°rotation. High level of visual comfort, deeply recessed light source. Available for four different output beams 15/24/36/60°. The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. Simple installation ceiling recessed with spring, A small downlight characterized by innovative and surprising solutions. The rotation and the right angled inclination make this product to be flexible and easy to handle. It is ideal for lighting architectural and artistic details up. High Definition optical lenses in thermoplastic material, uniform distribution. Famous brand LED chips CRI90+ 3steps. Smart lighting, achieved CASAMBI | DALI DT8 dimmable. Easy lighting demand, for a wide scala of projects, from hotels, retail, commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product.

Remote LED Driver	Accessories	Beam Angle	Color Temperature	Finishes
15W 350mA 30W 750mA 35W 800mA 25W 550mA	Hex Louver	15° 24° 36° 60°	2700K 3000K 4000K 5000K 6000K	Black White Customized