



INTERIOR LED RECESSED DOWN SPOTLIGHT

L03725



- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die-casting lighting fixture, powder coated.
- Ceiling Recessed Installation
- 300-400mm cable with quick connector.
- Famous brand COB LED CRI90 3SDCM
- Deeply recessed light source. I Super slim trim
- Remote LED Driver
- DALI I Triac I 0/1-10V I Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

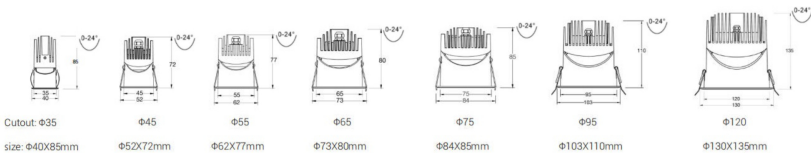

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03725 -7	7W	350lm	Ø 52xH72mm	Ø 45mm	150mA
L03725 -8	8W	400lm	Ø 62xH77mm	Ø 55mm	200mA
L03725 -10	10W	505lm	Ø 73xH80mm	Ø 65mm	250mA
L03725 -12	12W	600lm	Ø 84xH85mm	Ø 75mm	300mA

FEATURES

Same appearance both Fixed and Adjustable .The spotlight offer uniform distribution . Visual comfort low glare optic with recessed light source. available for a few different output beams. Specialized optical filters honeycomb can be ordered. Same appearance both Fixed and Adjustable . The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. Simple installation with steel springs. Realize superior lighting space with a deep cut-off angle. Easy lighting demand, for a wide scala of projects, from hotels, retail , commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product. Ø55 I Ø65 I Ø75mm available for 10°. Moreover, the IP54 and IP65 rating on same one luminaries (IP54 standard, IP65 customized)means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations..

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA 8W 200mA 10W 250mA 12W 300mA				