


## INTERIOR LED RECESSED DOWN SPOTLIGHT

L03826



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminum lighting fixture, powder coating.
- Ceiling recessed | Flat Pinhole
- 5years Warranty
- CITIZEN branded LED chips CRI97 2SDCM
- Flicker Free, Remote LED Driver version.
- Recessed light source. Visual comfort.
- Compatible with wired and wireless dimming systems.

### UNIFORM DISTRIBUTION AND SOFT LIGHT

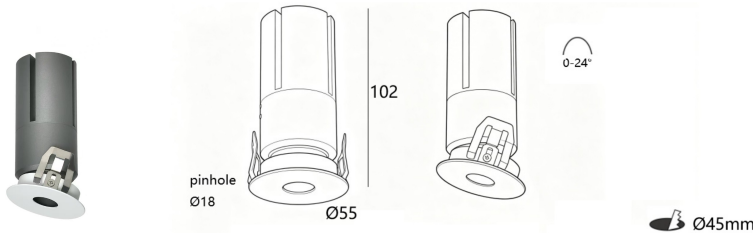

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03826-9	9W	580lm	∅55xH102mm	∅45mm	250mA
L03826-12	12W	780lm	∅55xH120mm	∅45mm	300mA

### FEATURES

Aluminum lighting fixture with powder coating. Remote LED driver version. Ceiling recessed installation, ∅18 flat pinhole, recessed light source UGR<16. the lighting fixture combined fixed and 24° adjustable, and consists of an LED light module, a metal flat panel and spring for easy installation. These advantages deliver flexibility and easy operation. Thanks to the ultra-thin metal mounting panel, with a thickness of only 0.8mm. It enables the luminaire to blend almost seamlessly with architectural surfaces. The optical design aligns light beams to intersect at the aperture, creating a crossed beam lighting pattern with minimal loss. The pinhole spotlight delivers a delicate cross-lighting effect, enhancing spatial depth with clean, defined light beams and creates a clean and sophisticated ceiling finish. CRI97, Compatible with wired and wireless dimming systems. IP20. An ideal engineering lighting solution for the mid-to-high-end market. 5-year warranty provided.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
9W 250mA 12W 300mA		24° 36°	2700K 3000K 4000K 5000K 6000K	Black White Customized