


INTERIOR LED RECESSED DOWN SPOTLIGHT

L03979



- IP54
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die-casting lighting fixture, powder coated.
- Ceiling Recessed Trimless
- 300-400mm cable with quick connector.
- Famous brand COB LED CRI90 3SDCM
- Deeply recessed light source. UGR<9
- Remote LED Driver
- DALI I Triac I 0/1-10V I Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND TRIMLESS

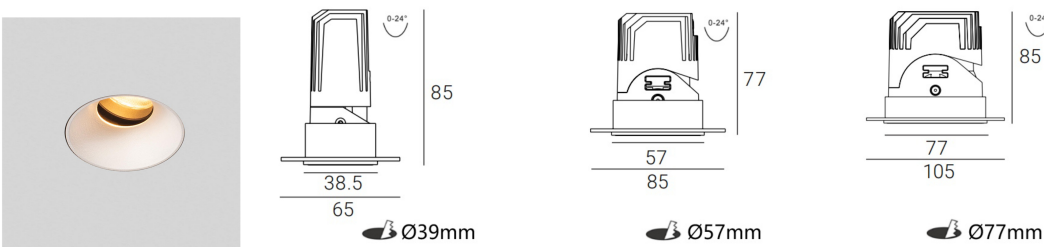

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L03979-7	7W	450lm	Ø 65xH85mm	Ø 39mm	150mA
L03979-9	9W	550lm	Ø 85xH77mm	Ø 57mm	250mA
L03979-15	15W	900lm	Ø 105xH85mm	Ø 77mm	350mA

FEATURES

Same appearance both Fixed and Adjustable . Trimless version. The spotlight offer uniform distribution . Visual comfort low glare optic with recessed light source. available for a few different output beams. Specialized optical filters honeycomb can be ordered. The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. Simple installation with steel springs. Realize superior lighting space with a deep cut-off angle. Easy lighting demand, for a wide scala of projects, from hotels, retail , commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product. Ø39 I Ø57 I Ø77mm available for 10° Moreover, the IP54 and IP65 rating on same one luminaries (IP54 standard, IP65 customized)means that they can be used even in bathroom or other damp indoor locations. This enables you to continue the ceiling uniformity throughout bathrooms, wellness areas and other indoor damp locations. An ideal engineering lighting solution for the mid-to-high-end market. Compatible with wired and wireless dimming systems. 5-year warranty provided.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
7W 150mA 9W 250mA 15W 350mA		15° 24° 36° 55°	2700K 3000K 4000K 5000K 6000K	Black White Customized