


## IP RATED WALL WASHER

L04049



- IP67
- CLASS III
- Surface Mounted Installation
- Aluminum extrusion materials, die-cast end caps and powder coating.
- Standard product with quick connector
- Eyes friendly CE certificate RoHS standard
- OSRAM branded LED CRI90+
- DALI Triac I 0/1-10V I DALI dimmable
- Warranty 5 Years

### EYES FRIENDLY AND UNIFORM DISTRIBUTION

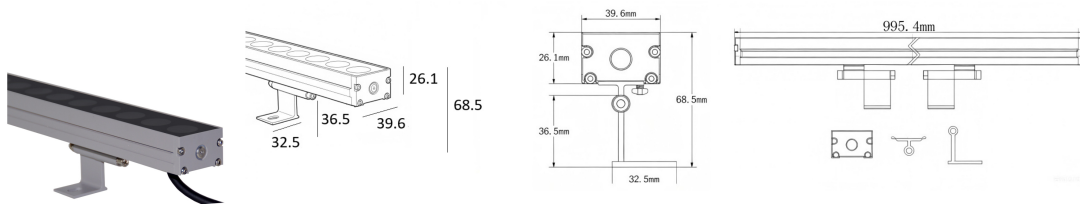

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L04049-18	18W	2150lm	□ L1000xW40xH26mm	□ mm	450mA
L04049-24	24W	3200lm	□ L1000xW40xH26mm	□ mm	600mA

### FEATURES

Aluminum extrusion materials, die-cast end caps and powder coating. Wall washer, surface mounted installation. Anti Glare Optical Design, IP67 certificate Waterproof ,120lm/W. Combining the fully sealed structure with the internal full potting process to achieve IP67 rated waterproof protection. Thanks to the aviation-grade titanium-aluminum alloy material and its high-efficiency cooling system, the wall washer lights deliver a long service life. OSRAM branded LED Chips, 2SDCM. CRI90+. The High Definition optical lens optic creates Uniform distribution. Up to 9 types of output beam angles. Ultra-clear tempered optical glass. Seamless connection enables continuous lighting with no dark spots, thanks to the uniform spacing between lamp beads. Available in standard 24V series, 48V series, RDN feedback function series, and constant power series, meeting various outdoor application scenarios. Achieved ON/OFF, 0-10V dimming , DALI dimmable, Warranty 5years

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
18W 450mA 24W 600mA		90°	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White Customized