


## LED WALL LAMPS

L04088



IP65

CLASS III

Wall Mounted Installation

Aluminum die-casting materials and powder coated.

Standard □124 | □220mm diameter with quick connector.


Eyes friendly CE certificate RoHS standard

OSRAM branded LED CRI90+

CASAMBI | Triac | 0/1-10V | DALI dimmable

Warranty 5 Years

### VISUAL COMFORT AND UNIFORM DISTRIBUTION

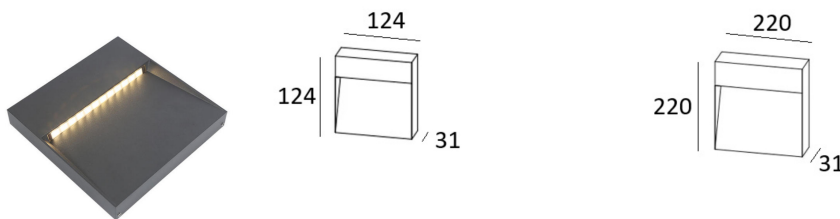

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L04088-6	6W	300lm	□ 124x124xH31mm	□ mm	150mA
L04088-10	10W	500lm	□ 220x220xH31mm	□ mm	250mA

### FEATURES

Die casting aluminum and powder coating. Wall or Ceiling mounted installation. The standard products comes in diameter of □124mm and □220mm with an directed lighting effect. OSRAM branded LED CRI90+, Remote LED Driver version. An ideal engineering lighting solution for the mid-to-high-end market. IP65 . warranty 5 years

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
6W 150mA 10W 250mA		90°	<input type="checkbox"/> 2700K <input type="checkbox"/> 3000K <input type="checkbox"/> 4000K <input type="checkbox"/> 5000K <input type="checkbox"/> 6000K	<input checked="" type="checkbox"/> Black <input type="checkbox"/> White Customized