



# ALUMINIUM PROFILE LINEAR DOWN LIGHT 5050

## L05008

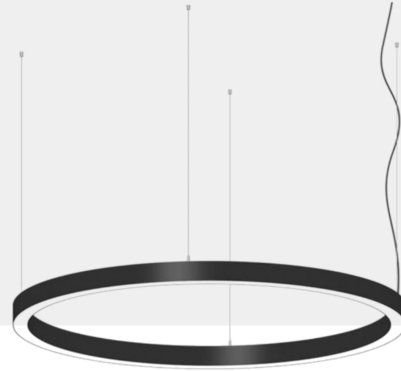

- IP20
- CLASS III
- Pendant Lighting
- ECO Energy Saving
- Flicker Free
- Eyes friendly CE certificate RoHS standard
- CRI90+ Bridgelux branded SMD LED
- Europe Standard & CE Certificate.
- 400-600mm cable with quick connector
- DALI I CASAMBI Dimming

A single lighting solution with linear down option

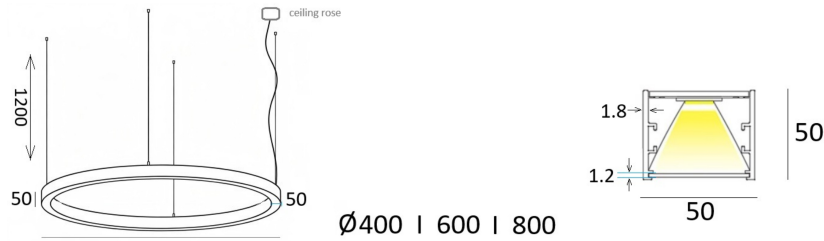

Ø400 | 600 | 800

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L05008 -20	20W	2000lm	∅ W50xH50xD400mm	∅ mm	500mA
L05008 -30	30W	3000lm	∅ W50xH50xD600mm	∅ mm	750mA
L05008 -40	40W	4000lm	∅ W50xH50xD800mm	∅ mm	1000mA

### FEATURES

It is a single lighting solution with linear down option. Aluminium 6063 curved profile and powder coating. W50xH50mm. One-piece circular shape. The basic model comes in black RAL9005 or RAL9016 white colors. up to 3 different diameter 400mm / 600mm / 800mm, Suspended installation, standard length of cable is L1200mm . High-transmittance diffuser, high-efficiency & high-CRI Bridgelux SMD (CRI90+), 110° beam angle for general lighting. Remote LED Driver version, installed in ceiling rose, Achieved wired or wireless dimming control, Customized color finishing, size or power changes are possible depending on the request and the quantity. To match the specific look and feel of your design. Smart lighting, achieved CASAMBI | Dali | DMX control | 5year warranty

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
20W 500mA 30W 750mA 40W 1000mA		110°	<ul style="list-style-type: none"> <li> 2700K</li> <li> 3000K</li> <li> 4000K</li> <li> 5000K</li> <li> 6000K</li> </ul>	<ul style="list-style-type: none"> <li> Black</li> <li> White</li> <li>Customized</li> </ul>