


## ALUMINIUM PROFILE LINEAR DOWN LIGHT

L05009



- IP20
- CLASS III
- Pendant Lighting
- ECO Energy Saving
- Flicker Free
- Eyes friendly CE certificate RoHS standard
- CRI90+ Bridgelux branded SMD LED
- Europe Standard & CE Certificate.
- 400-600mm cable with quick connector
- DALI I CASAMBI Dimming

A single lighting solution with linear down option




Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L05009-20	20W	2000lm	∅ D457xW16xH60mm	∅ mm	500mA
L05009-30	30W	3000lm	∅ D600xW16xH60mm	∅ mm	750mA
L05009-40	40W	4000lm	∅ D800xW16xH60mm	∅ mm	1000mA

### FEATURES

Lake Lucerne Extremely Narrow The beauty of lighting fixtures is the consequence of an honest, crystal and precise way of thinking. They are beautiful and pure, just like the technology which is inside them. The quality of the mechanical workings can be recognised even by touching them. L05009 is a single accent lighting solution, One-piece circular shape. Aluminium curved profile and powder coating. The basic model comes in black RAL9005 or RAL9016 white and Bronze colors. While customized colors and adjustable power are supported based on customer requirements. Up to 3 different diameter 400mm / 600mm / 800mm, Lake Lucerne Extremely Narrow lenses, Up to two beam angles: 24° 36°, delivering highly uniform light distribution. UGR<16. Achieved a real high level of visual comfort. CRI90+, High consistency 2SDCMs to ensure color temperature consistency for the quality lighting. Suspended installation, snap-in design enables you to easily install the ceiling rose, extremely fast installation, saving you valuable time and effort. Stepless pendant height adjustment, the lamp height can be freely adjusted (cable length: 1700mm) to accommodate flexible lighting needs. simply pull down to lower, push up to raise, and it locks automatically when released. It features an integrated design that combines load-bearing steel wire rope and power cable. With purely manual operation, it is safe and convenient to use. Smart lighting, achieved CASAMBI I DalI DMX dimm.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
20W 500mA 30W 750mA 40W 1000mA		24° 36°	2700K 3000K 4000K 5000K 6000K	Black White Customized

# Installation Instructions

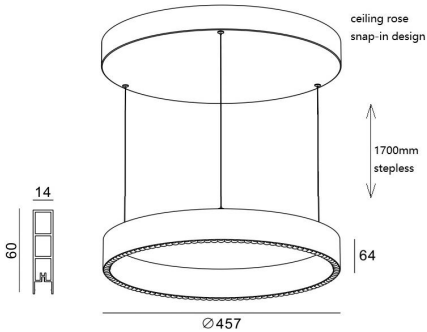

Lake Lucerne Extremely Narrow The beauty of lighting fixtures is the consequence of an honest, crystal and precise way of thinking. They are beautiful and pure, just like the technology which is inside them. The quality of the mechanical workings can be recognised even by touching them. L05009 is a single accent lighting solution, One-piece circular shape. Aluminium curved profile and powder coating. The basic model comes in black RAL9005 or RAL9016 white and Bronze colors. While customized colors and adjustable power are supported based on customer requirements. Up to 3 different diameter 400mm / 600mm / 800mm, Lake Lucerne Extremely Narrow lenses, Up to two beam angles: 24° 36° , delivering highly uniform light distribution. UGR<16. Achieved a real high level of visual comfort. CRI90+, High consistency 2SDCMs to ensure color temperature consistency for the quality lighting. Suspended installation, snap-in design enables you to easily install the ceiling rose, extremely fast installation, saving you valuable time and effort. Stepless pendant height adjustment, the lamp height can be freely adjusted (cable length: 1700mm) to accommodate flexible lighting needs. simply pull down to lower, push up to raise, and it locks automatically when released. It features an integrated design that combines load-bearing steel wire rope and power cable. With purely manual operation, it is safe and convenient to use. Smart lighting, achieved CASAMBI | Dalí | DMX dimm.

<p>Unpacking and take out the lighting fixture, remove any protective materials, and take out the bracket.</p> <p><b>1</b></p>	<p><b>Wood ceiling installation</b></p> <p><b>2A</b></p>	<p>Connect the safety buckle.</p> <p><b>3</b></p>	<p>Tool-free manual height adjustment..</p> <p><b>5</b></p>
	<p><b>Concrete ceiling installation</b></p> <p><b>2B</b></p>	<p>Fixture to the main wires. Install the ceiling canopy to bracket.</p> <p><b>4</b></p>	<p><b>Accessories part</b></p> <ul style="list-style-type: none"> <li>One pair of soft cotton gloves</li> <li>3pcs*M4*35mm(M4*35mm is used to fix the bracket)</li> <li>3pcs of expanded colloid</li> </ul>
<p>Drive the expanded colloides into the holes and secure the bracket on the ceiling with screws.</p> <p><b>2C</b></p>			