


INTERIOR LED RECESSED DOWN SPOTLIGHT

L06754



- IP20
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- Aluminium die casting material and powder coating
- Ceiling wall recessed I
- 400-600mm cable with quick connector
- COB LED 3SDCM | CRI90 | 90° OSRAM SMD
- Flicker Free | Remote LED Driver version.
- Deeply recessed light source | High level of visual comfort
- 0/1-10V | Triac | DALI Tunable white dimming

HIGH LEVEL OF VISUAL COMFORT AND UNIFORM DISTRIBUTION

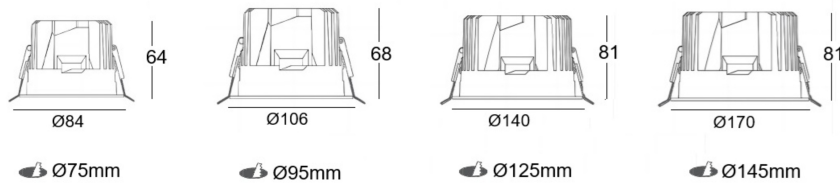

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L06754-15	15W	1350lm	Ø 84xH65mm	Ø 75mm	350mA
L06754-20	20W	1800lm	Ø 106xH68mm	Ø 95mm	500mA
L06754-30	30W	2700lm	Ø 140xH81mm	Ø 125mm	750mA
L06754-40	40W	3500lm	Ø 170xH81mm	Ø 145mm	1000mA

FEATURES

The fixing spotlight offer high level of visual comfort, UGR<19. Aluminium die casting material and powder coating. Remote LED driver version. Dimmable. Five different output beams 15/24/36/50° COB LED CRI90 3SDCM AND 90° OSRAM SMD. The metal decorative secondary optic available in multiple color finishing, Black | White | Chromed Silver. The basic model comes in white color. Customized color finishing, power changes are possible depending on the request and the quantity. Simple installation with steel springs. Realize superior lighting space with a deep cut-off angle. Easy lighting demand, for a wide scala of projects, from hotels, retail , commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
15W 350mA 20W 500mA 30W 750mA 40W 1000mA				