










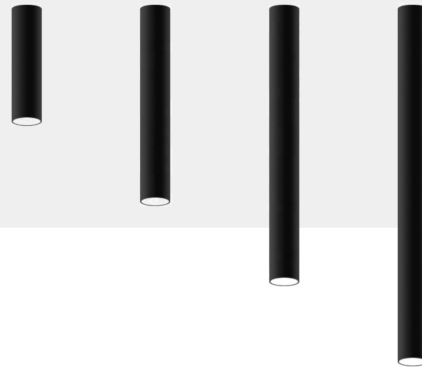


INTERIOR LED CEILING MOUNTED SPOTLIGHT

L08023



-  IP20
-  CLASS III
-  Ceiling Mounted Installation
-  Aluminium lighting fixture, powder coated.
-  Customized the length of tube is possible
-  Eyes friendly CE certificate RoHS standard
-  CRI90 3SDCM CITIZEN COB LED
-  DALI Triac I 0/1-10V I DALI dimmable
-  Tunable White dimming
-  Warranty 5 Years

HIGH LUMINOUS EFFICIENCY AND UNIFORM DISTRIBUTION.

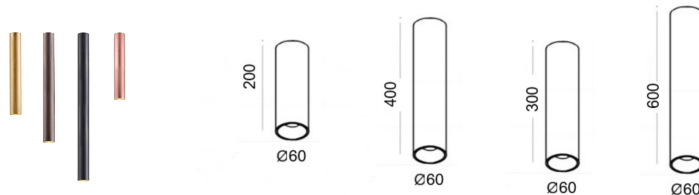

| Code | System Power W | Output Lumen lm | Dimension mm | Cut Hole mm | Power Supply mA |
|------------|----------------|-----------------|--------------|-------------|-----------------|
| L08023 -5 | 5W | 450lm | Ø 60xH200mm | Ø mm | 130mA |
| L08023 -7 | 7W | 630lm | Ø 60xH300mm | Ø mm | 150mA |
| L08023 -9 | 9W | 800lm | Ø 60xH400mm | Ø mm | 200mA |
| L08023 -10 | 10W | 900lm | Ø 60xH600mm | Ø mm | 250mA |

FEATURES

Surface mounted spotlight with Ø60mm diameter with an elongated cylindrical housing. Three installation options: trimless, with a decorative trim and surfaced. Aluminium extrusion and powder coating housing. A lens is used instead of a conventional reflector. It allows to create directional and powerful luminous flux. White OR Black color finishing as standard. --Power changes are possible depending on the request and the quantity. -On the request it can be offered in any RAL colour, matching the specific look and feel of your design.

Built-in LED Driver

5W 130mA
7W 150mA
9W 200mA
10W 250mA






Accessoires



Beam Angle

 24°
 36°

Color Temperature

 2700K
 3000K
 4000K
 5000K
 6000K

Finishes

 Black
 White
Customized