


INTERIOR LED PENDANT SPOTLIGHT

L08075



- IP20
- CLASS III
- Pendant Installation
- Aluminium lighting fixture, powder coated.
- Standard length of cable 2000mm with quick connector.
- Eyes friendly CE certificate RoHS standard
- CRI90 + 2SDCM COB LED
- DALI Triac 1 0/1-10V I DALI dimmable
- Tunable White dimming
- Warranty 5 Years

ELONGATED CYLINDRICAL HOUSING AND MULTIPLE INSTALLATIONS

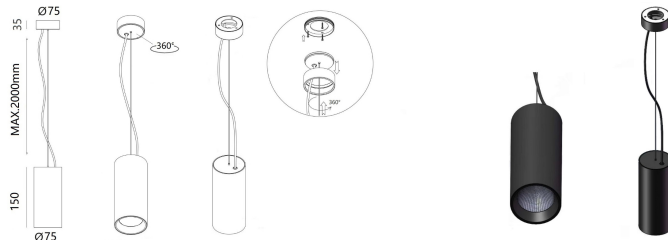

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L08075-15	15W	1400lm	Ø 75xH150mm	Ø mm	350mA
L08075-25	25W	2300lm	Ø 95xH250mm	Ø mm	650mA
L08075 -	W	lm	Ø mm	Ø mm	mA

FEATURES

Pendant luminaire with Ø75 | Ø91mm diameter with an elongated cylindrical housing. Multiple installations. trimless, with a decorative trim and surfaced. Aluminum extrusion and powder coating housing. A lens is used instead of a conventional reflector. It allows to create directional and powerful luminous flux. The suspension system is very aesthetically pleasing, the power come through the suspension strands. Customized size, IP rating, color finishing, control systems and power changes are possible depending on the request and the quantity.

Built-in LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
15W 350mA 25W 650mA W mA	Hex Louver	15° 24° 38° 55°	2700K 3000K 4000K 5000K 6000K	Black White Customized