


## SURFACE MOUNTED LED DOWN SPOTLIGHT - IP65

L08119



- IP65
- CLASS III
- Europe Standard & CE Certificate. 220-240V 50/60Hz
- High Efficiency IP65 Fixing Spotlight
- Surface Mounted
- Aluminium die-casting lighting fixture, powder coated.
- Famous brand LED CRI90+ 2-3SDCM
- Flicker Free | Deeply recessed light source.
- Built-in LED Driver
- DALI | Triac | 0/1-10V | CASAMBI

### IP65 HIGH EFFICIENCY AND UNIFORM DISTRIBUTION

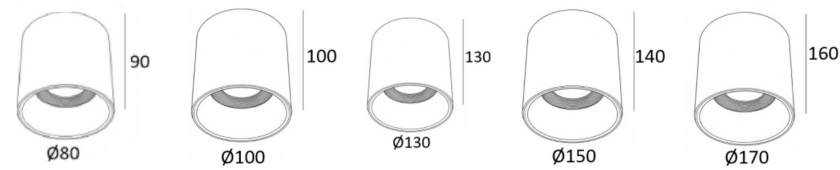

Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L08119-10	10W	1400lm	Ø 80xH90mm	Ø 80xH90mm	250mA
L08119-15	15W	2100lm	Ø 100xH100mm	Ø 100xH100mm	400mA
L08119-25	25W	3500lm	Ø 130xH130mm	Ø 130xH130mm	650mA
L08119-35	35W	4900lm	Ø 150xH140mm	Ø 150xH140mm	900mA
L08119-42	42W	5800lm	Ø 170xH160mm	Ø 170xH160mm	1050mA

### FEATURES

Surface mounted fixed spotlight with deeply recessed anti-glare light source. IP65 rated, suitable for both indoor and outdoor engineering projects. It offers two beam angles: 36° and 55°, delivering highly uniform light distribution. This high-efficiency spotlight achieves up to 140lm/W. Constructed with die-cast aluminum and powder coating, it is equipped with an ABS baffle available in multiple colors. The LED driver is built-in. The standard version comes in white and black, while customized colors and adjustable power are supported based on customer requirements and order quantity. It adopts high-brand LED chips with CRI90+ and 3-step binning. Supports smart lighting systems, compatible with CASAMBI and DALI DT8 dimming. The IP65 rating allows safe application in bathrooms and other humid outdoor environments, ensuring consistent and even lighting across the space. The spotlight features a clean design and excellent anti-glare performance, providing comfortable, non-dazzling lighting. An ideal engineering lighting solution for the mid-to-high-end market. 5-year warranty provided.

Built-in LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
10W 250mA 15W 400mA 25W 650mA 35W 900mA 42W 1050mA		36° 55°	2700K 3000K 4000K 5000K 6000K	Black White Customized

