




INTERIOR LED TRACK SPOTLIGHT

L09110



- IP20
- CLASS III
- 3-phase European Standard Track or DALI Track Rails
- ECO Energy Saving
- Flicker Free
- Eyes friendly CE certificate RoHS standard
- CRI90+ CRI90 2-3SDCM Famous brand COB LED
- DALI Triac I 0/1-10V I DALI dimmable
- 90°adjustable 355° rotation
- Warranty 5 Years

An ideal solution for accent lighting



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L09110 -12	12W	960lm	Ø 45xH100mm	Ø mm	280mA
L09110 -18	18W	1440lm	Ø 55xH115mm	Ø mm	450mA
L09110 -25	25W	2000lm	Ø 65xH135mm	Ø mm	650mA


FEATURES

Track spotlight, aluminium lighting fixture, Integrated cooling system to ensure the spotlight long lifetime. Achieved DALI dimmable, An ideal solution for accent lighting. The fixture allows 360°rotation and 90°adjustable make the spotlight highly flexible and easy to handle, the light is emitted exactly where you want it. Specialized optical filters can be ordered. The light spots were natural transition, clear and soft. 3SDCM CRI>90, The standard product comes in RAL 9005 Black I RAL 9016 White. Customized power changes are possible depending on the request and the quantity.

Integrated LED Driver

PRO-T61050
12W 280mA
18W 450mA
25W 650mA

Accessoires



Beam Angle

- 15°
- 24°
- 38°
- 55°

Color Temperature

- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

Finishes


- Black
- White
- Customized

Adjustable Angle

Rotate 360° +90° vertically to adjust the Angle, shape the position of light effect at will, and play wherever you like




Datasheet I 3 Circuits dali track-1M (1000mm)

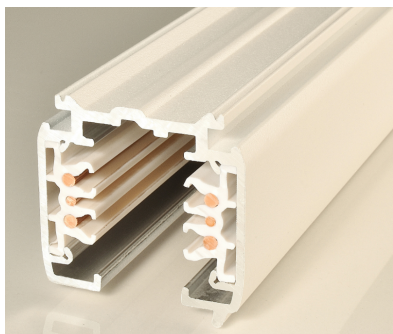


Product Code	PRO-0610-W
Color	White RAL 9010
Product Code	PRO-0610-S
Color	Silver RAL 7040
Product Code	PRO-0610-B
Color	Black RAL 9011
Main materials	Copper+Aluminum
Inner box/Outer box	1/6 pcs
Net weight per piece	960 g
Rated voltage per circuit	220-250V/10A (EU) ,120V/20A (US)

Dimensions




Connecting Diagram

3 circuits dali track system

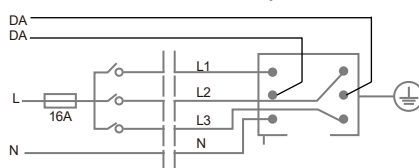


1 phase 230V 16A Max.

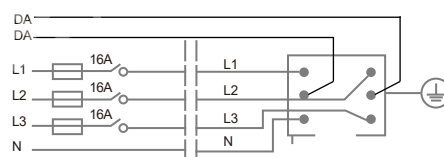

3 phase 230V 3*16A Max.


Mechanical load diagram

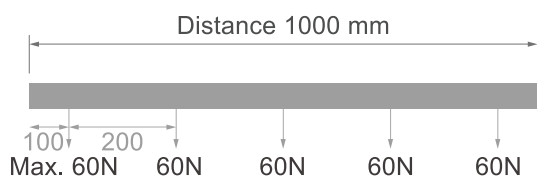








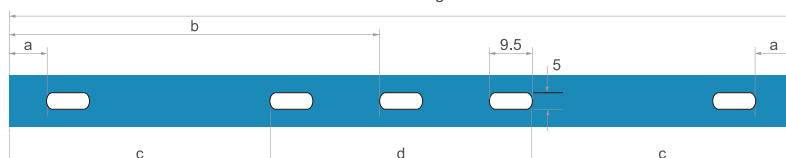






Fixing point dimensions

L / mm	a / mm	b / mm	c / mm	d / mm
1000	125			
2000	125	995		
3000	125		914	1172
4000	125		1247	1506

L=Track length



6 wires 3-circuit Triac/Phase/DALI Track Rails - Surface Mounted Suspended			
image	code	description	
	PRO-0610	L1000mm Surface Mounted Suspended track rail	
	PRO-0615	L1500mm Surface Mounted Suspended track rail	
	PRO-0620	L2000mm Surface Mounted Suspended track rail	
	PRO-0630	L3000mm Surface Mounted Suspended track rail	
Connectors for the surface mounted and suspended version track rails			
	PRO-D631L/R	power feed	
	PRO-0432	end cap	
	PRO-D633	I straight connector invisible version	
	PRO-D634	I straight connector visible version	
	PRO-D635L/R	L connector fixed version	
	PRO-MD638	L connector adjustable version	
	PRO-MD635	connector flexible version A	
	PRO-D636L1/R1/L2/R2	T connector fixed version	
	PRO-MD636L/R	T connector adjustable version	
	PRO-D637	+ connector	
	PRO-D639	connector flexible version B	
	PRO-EZ0447	Buckle and Suspension Rod (M6xL1000mm)	
	PRO-EZ0448	Buckle and the Suspension Wire (L1500mm)	
	PRO-EZ0448	Buckle and the Suspension Wire (L2000mm)	
	PRO-EZ0448	Buckle and the Suspension Wire (L3000mm)	
	PRO-EZ0448	Buckle and the Suspension Wire (L4000mm)	
	PRO-EZ0448	Buckle and the Suspension Wire (L5000mm)	
	PRO-EZ0449	Buckle and the Suspension Wire (L2000mm)	
	PRO-EZ0449	Buckle and the Suspension Wire (L3000mm)	
	PRO-EZ0449	Buckle and the Suspension Wire (L4000mm)	