



INTERIOR LED RECESSED SPOTLIGHT






















7W 200mA
490lm

Double adjustability tube pull-out spotlight , uniform distribution . Visual comfort low glare optic , recessed light source. available for five different output beams 15/24/36/50°. Specialized optical filters can be ordered. The decorative secondary optic available in multiple color finishing, Black I White I Chromed I Gold. The basic model comes in white RAL9003 or black RAL9005 colors. Customized color finishing, power changes are possible depending on the request and the quantity. Simple and flexible installation trimless or with spring.

12W 300mA
840lm

A small downlight characterized by innovative and surprising solutions. The possibility to take it out from its frame , the rotation and the right angled inclination make this product to be highly flexible and easy to handle. It is ideal for lighting architectural and artistic details up. The body of trimmed style can either be completely hidden into the ceiling or fully visible to aim it wherever you want. Realize superior lighting space with a deep cut-off angle.

25W 600mA
1750lm

-  Europe Standard CE Certificate.
-  ECO Energy Saving
-  Class III
-  Eyes friendly
-  220-240V 50-60/Hz
-  Easy for Installation
-  Warranty 5 Years
-  30-40cm cable with quick connector.
-  DALI Triac I 0/1-10V I DALI dimmable
-  Tunable White
-  IP44
-  COB LED **bridgelux**
-  Tridonic ON/OFF I OSRAM Dali Dimmable
-  Ceiling, wall recessed.
-  Ceiling thickness 3-20mm
-  CRI97 36V DC
-  FLICKER FREE Flicker Free , Remote LED Driver
-  0-90°
355° 90° adjustable and 355° rotation
-  15° 24° 36° 50°



L04201

7W	↔ Ø58	001
12W	↔ Ø77	001
25W	↔ Ø97	001



L04208

7W	↔ Ø55	001
12W	↔ Ø75	002
25W	↔ Ø95	002



L04202

14W	↔ 129x68	002
24W	↔ 180x91	002
40W	↔ 225x111	003



L04203

7W	↔ 58x58	003
12W	↔ 77x77	003
20W	↔ 97x97	003




L04204

14W	↔ 120x62	004
24W	↔ 167x80	004
50W	↔ 209x97	004



L04206

21W	↔ 165x58	004
36W	↔ 225x77	005
75W	↔ 287x97	005

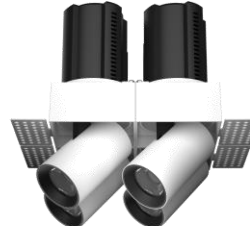

L04207

28W	↔ 111x111	005
48W	↔ 153x153	005
80W	↔ 192x192	006



L04209

14W	↔ 126x65	006
24W	↔ 178x88	006
40W	↔ 223x109	006



L04210

7W	↔ 55x55	007
12W	↔ 75x75	007
20W	↔ 95x95	007



L04211

14W	↔ 120x60	007
24W	↔ 164x77	008
50W	↔ 207x95	008



L04212

14W	↔ 109x55	008
24W	↔ 150x75	008
50W	↔ 190x95	009




L04213

21W	↔ 163x55	009
36W	↔ 222x75	009
75W	↔ 284x95	009



L04214

28W	↔ 109x109	010
48W	↔ 150x150	010
80W	↔ 190x190	010
100W	↔ 190x190	010

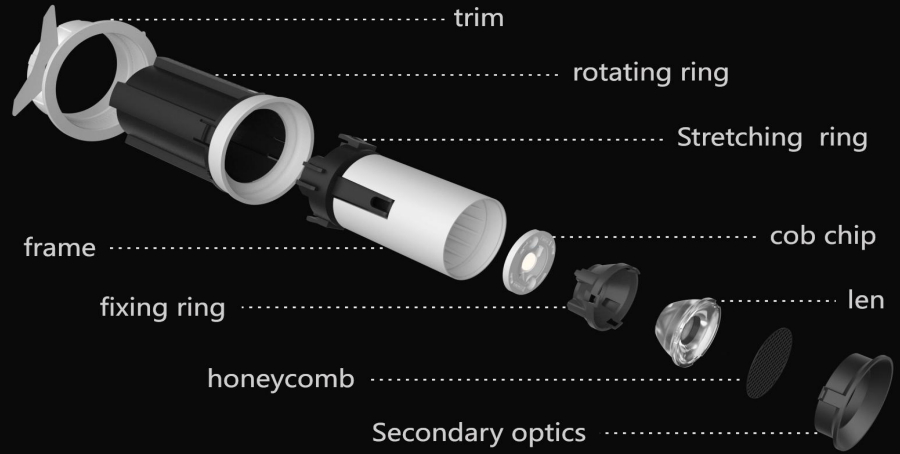


honeycomb



single polarized



double polarized



oval



frosted




honeycomb

single polarized


double polarized

oval

frosted



modular design multiple light.
tool-free to change the LED module

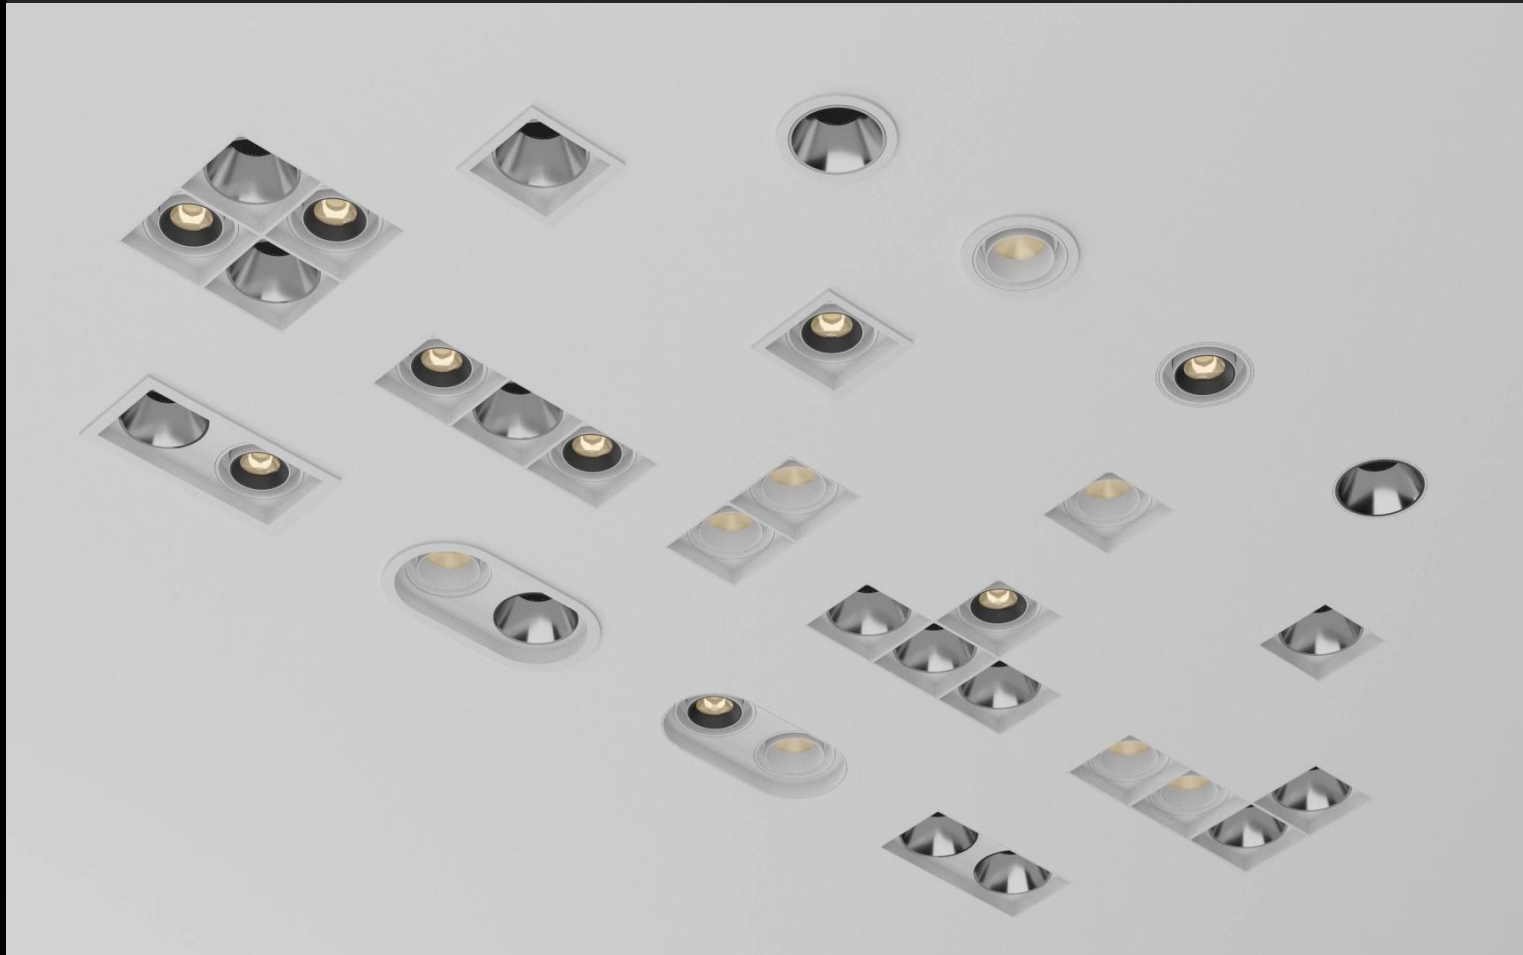




INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04201 - 7



power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	58xH86	1	15° 26° 36° 50°
IP44 DALI FLICKER FREE 220-240V 50/60Hz 3-30mm CRI >97					

L04201 - 12



power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	77xH104	1	15° 26° 36° 50°
IP44 DALI FLICKER FREE 220-240V 50/60Hz 3-30mm CRI >97					

L04201 - 25



power	driver	lumen	size(mm)	LEDs	beam angle
25W	625mA	2125lm 4000K	97xH127	1	15° 26° 36° 50°
IP44 DALI FLICKER FREE 220-240V 50/60Hz 3-30mm CRI >97					

L04208 - 7



power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	62xH86	1	15° 26° 36° 50°
IP44 DALI FLICKER FREE 220-240V 50/60Hz 3-30mm CRI >97					


Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming		Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04208 -12




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

12W	300mA	1020lm 4000K	84xH104	1	
-----	-------	--------------	---------	---	--



L04208 -25




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

25W	625mA	2125lm 4000K	110xH127	1	
-----	-------	--------------	----------	---	--



L04202 -14




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

14W	175mA	1190lm 4000K	129x68xH91	2	
-----	-------	--------------	------------	---	--



L04202 -24





power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

24W	300mA	2040lm 4000K	180x91xH116	2	
-----	-------	--------------	-------------	---	--



Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
-------------------	-----	-------------	-----------	-----------	-----

Triac dimming
0/1-10V dimming
DALI dimming
TW dimming



■ Matt white
■ Matt black
■ Customized

■ 2700K
■ 3000K
■ 4000K
■ 5000K


CRI90+

*It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04202 - 40




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

40W	500mA	3400lm 4000K	225x111xH142	2	
-----	-------	--------------	--------------	---	--




L04203 - 7




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

7W	175mA	595lm 4000K	58x58xH94	1	
----	-------	-------------	-----------	---	--




L04203 - 12



power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

12W	300mA	1020lm 4000K	77x77xH116	1	
-----	-------	--------------	------------	---	--



L04203 - 20




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

20W	500mA	1700lm 4000K	97x97xH144	1	
-----	-------	--------------	------------	---	--



Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
-------------------	-----	-------------	-----------	-----------	-----

Triac dimming
0/1-10V dimming
DALI dimming
TW dimming



■ Matt white
■ Matt black
■ Customized

■ 2700K
■ 3000K
■ 4000K
■ 5000K


CRI90+

*It allows you to match the fixture with its surroundings.



INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04204 -14




120x62

power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

14W 175mA 1190lm 4000K 120x62xH91 2




L04204 -24




167x80

power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

24W 300mA 2040lm 4000K 167x80xH116 2




L04204 -50




209x97

power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

50W 625mA 4250lm 4000K 209x97xH142 2



L04206 -21



165x58

power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

21W 175mA 1785lm 4000K 165x58xH94 3




Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming		Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.



INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04206 - 36




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

36W	300mA	3060lm 4000K	225x77xH116	3	
-----	-------	--------------	-------------	---	--



L04206 - 75





power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

75W	625mA	6375lm 4000K	287x97xH144	3	
-----	-------	--------------	-------------	---	--



L04207 - 28


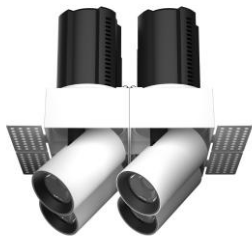


power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

28W	175mA	2380lm 4000K	111x111xH94	4	
-----	-------	--------------	-------------	---	--



L04207 - 48

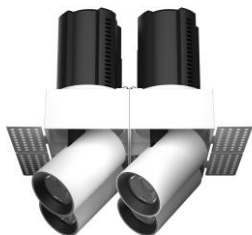

power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

48W	300mA	4080lm 4000K	153x153xH136	4	
-----	-------	--------------	--------------	---	--





Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming		Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.



INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04207 -80

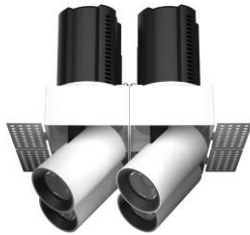


power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

80W	500mA	6800lm 4000K	192x192xH144	4	
-----	-------	--------------	--------------	---	--



L04209 -14



power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

14W	175mA	1190lm 4000K	140x79xH91	2	
-----	-------	--------------	------------	---	--



L04209 -24




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

24W	300mA	2040lm 4000K	194x105xH116	2	
-----	-------	--------------	--------------	---	--



L04209 -40





power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

40W	500mA	3400lm 4000K	239x125xH140	2	
-----	-------	--------------	--------------	---	--



Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
-------------------	-----	-------------	-----------	-----------	-----

Triac dimming
0/1-10V dimming
DALI dimming
TW dimming



Matt white
 Matt black
 Customized

2700K
 3000K
 4000K
 5000K


CRI90+

*It allows you to match the fixture with its surroundings.



INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04210 - 7




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

7W	175mA	595lm 4000K	65x65xH94	1	
----	-------	-------------	-----------	---	--



L04210 - 12




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

12W	300mA	1020lm 4000K	85x85xH116	1	
-----	-------	--------------	------------	---	--



L04210 - 20




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

20W	500mA	1700lm 4000K	105x105xH140	1	
-----	-------	--------------	--------------	---	--



L04211 - 14



power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

14W	175mA	1190lm 4000K	130x69xH91	2	
-----	-------	--------------	------------	---	--




Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming		Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.



INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04211 -24




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

24W	300mA	2040lm 4000K	180x90.5xH116	2	
-----	-------	--------------	---------------	---	--



L04211 -50




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

50W	625mA	4250lm 4000K	223.5x109.5xH142	2	
-----	-------	--------------	------------------	---	--



L04212 -14




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

14W	175mA	1190lm 4000K	118x65xH94	2	
-----	-------	--------------	------------	---	--



L04212 -24





power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

24W	300mA	2040lm 4000K	158x85xH116	2	
-----	-------	--------------	-------------	---	--



Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
-------------------	-----	-------------	-----------	-----------	-----

Triac dimming
0/1-10V dimming
DALI dimming
TW dimming



Matt white
 Matt black
 Customized

2700K
 3000K
 4000K
 5000K


CRI90+

*It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04212 - 50




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

50W	625mA	4250lm 4000K	198x104.5xH144	2	
-----	-------	--------------	----------------	---	--



L04213 - 21




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

21W	175mA	1785lm 4000K	171x64xH94	3	
-----	-------	--------------	------------	---	--




L04213 - 36




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

36W	300mA	3060lm 4000K	232x85xH116	3	
-----	-------	--------------	-------------	---	--



L04213 - 75




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

75W	625mA	6375lm 4000K	294x105xH144	3	
-----	-------	--------------	--------------	---	--



Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
-------------------	-----	-------------	-----------	-----------	-----

Triac dimming
0/1-10V dimming
DALI dimming
TW dimming



■ Matt white
■ Matt black
■ Customized

■ 2700K
■ 3000K
■ 4000K
■ 5000K


CRI90+

*It allows you to match the fixture with its surroundings.



INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04214 -28




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

28W	175mA	2380lm 4000K	118x118xH94	4	
-----	-------	--------------	-------------	---	--



L04214 -48




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

48W	300mA	4080lm 4000K	158x158xH116	4	
-----	-------	--------------	--------------	---	--



L04214 -80




power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

80W	500mA	6800lm 4000K	198x198xH144	4	
-----	-------	--------------	--------------	---	--



L04214 -100



power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

100W	625mA	8500lm 4000K	198x198xH144	4	
------	-------	--------------	--------------	---	--



Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming		Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.