


LED STANDING SPOT LIGHT

L00706



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

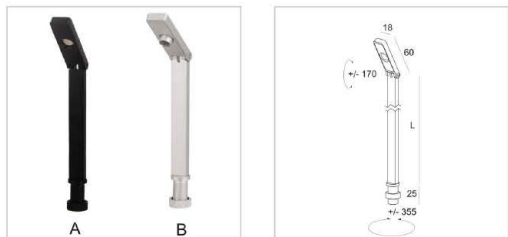

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.



JET-GLORY LIGHTING Jewelry Lights

L00707



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED STANDING SPOT LIGHT

L00708



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

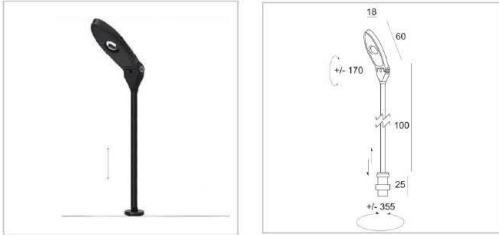

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




JET-GLORY LIGHTING Jewelry Lights

L00709



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

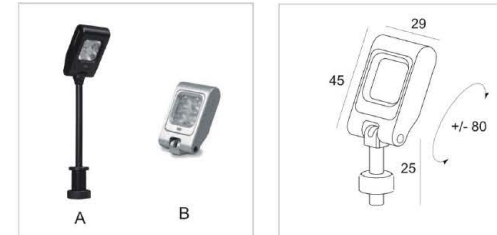

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED STANDING SPOT LIGHT

L00710



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




JET-GLORY LIGHTING

Jewelry Lights

L00711



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	9W
LuminousFlux	900lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	20V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED STANDING SPOT LIGHT

L00712



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	6V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

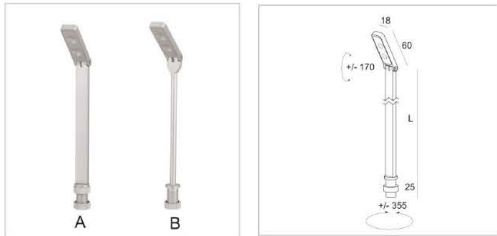

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




JET-GLORY LIGHTING Jewelry Lights

L00713



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

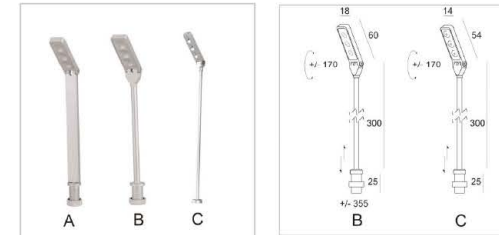

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED STANDING SPOT LIGHT

L00715



LightSource	Epistar LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

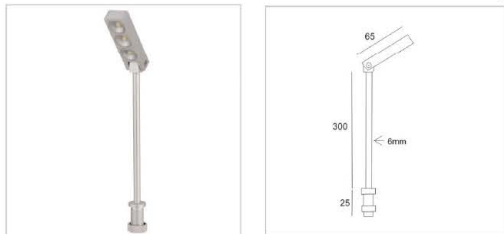

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.



JET-GLORY LIGHTING Jewelry Lights

L00716



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED STANDING SPOT LIGHT

L00717



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

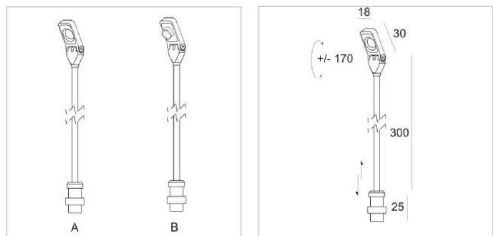

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




JET-GLORY Lighting E: info@jet-glory.com T: +86 769 8801 1804

JET-GLORY LIGHTING Jewelry Lights

L00718



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	5V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

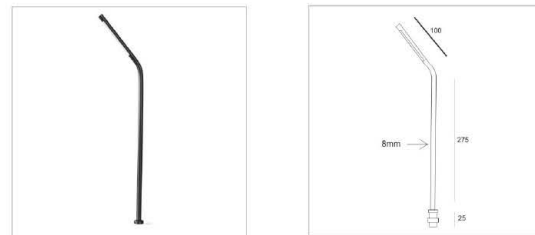

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




JET-GLORY Lighting E: info@jet-glory.com T: +86 769 8801 1804

LED STANDING SPOT LIGHT

L00719




LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	9W
LuminousFlux	900lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	30V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

L00721



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	6W
LuminousFlux	600lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	20V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




JET-GLORY LIGHTING Jewelry Lights

L00720




LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	6W
LuminousFlux	600lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	20V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

L00722

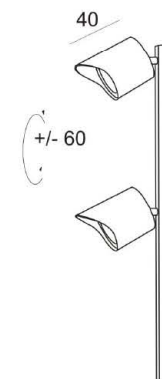

LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	6W
LuminousFlux	600lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	20V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



LED STANDING SPOT LIGHT

L00723



LightSource	Osram LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	18W
LuminousFlux	1800lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	60
Voltage/current	24V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

L00725




LightSource	Osram LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø8 mm
PowerConsumption	48W
LuminousFlux	4800lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	45
Voltage/current	24V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



JET-GLORY LIGHTING Jewelry Lights

L00724

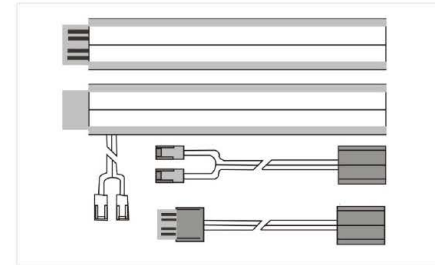


LightSource	Osram LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	N/A
PowerConsumption	6W
LuminousFlux	600lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	45
Voltage/current	24V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

L00726



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




LED STANDING SPOT LIGHT

L00727



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø55mm
PowerConsumption	3W
LuminousFlux	350lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




JET-GLORY Lighting E: info@jet-glory.com T: +86 769 8801 1804

JET-GLORY LIGHTING Jewelry Lights

L00728



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




JET-GLORY Lighting E: info@jet-glory.com T: +86 769 8801 1804

LED STANDING SPOT LIGHT

L00729



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	43mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	300mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

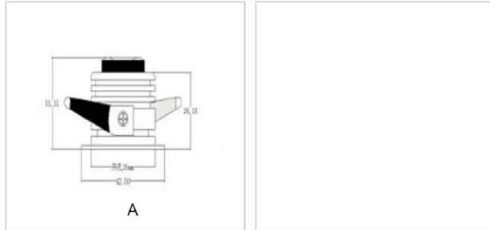

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

L00731



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø25mm
PowerConsumption	1.5W
LuminousFlux	100lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	3V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




JET-GLORY LIGHTING Jewelry Lights

L00730



LightSource	Citizen LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø40mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

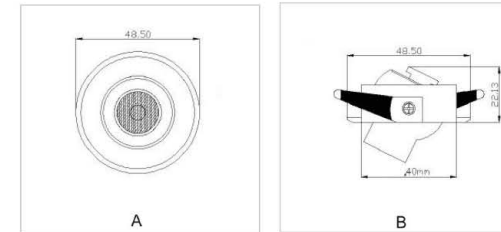

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

L00732



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø30mm
PowerConsumption	2W
LuminousFlux	200lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




LED STANDING SPOT LIGHT

L00733



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	3W
LuminousFlux	300 lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

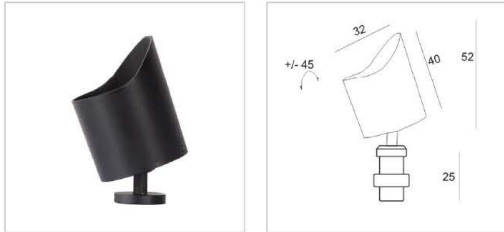


Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

L00735



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	2W
LuminousFlux	200 lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



JET-GLORY LIGHTING Jewelry Lights

L00734



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	2W
LuminousFlux	200lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	45
Voltage/current	3V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.

L00736



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø30mm
PowerConsumption	2W
LuminousFlux	200lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	




LED STANDING SPOT LIGHT

L00714



LightSource	Epistar LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø10mm
PowerConsumption	4W
LuminousFlux	400lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	60
Voltage/current	10V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

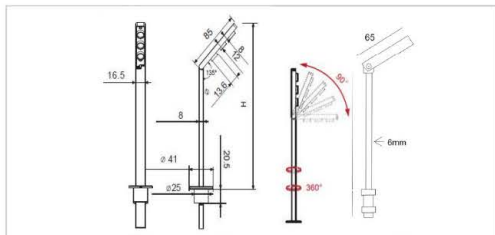

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.



JET-GLORY LIGHTING Jewelry Lights

L00738



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø13mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50, 000hours
IP-code	IP20
Beam Angle	6-60
Voltage/current	3V DC
Output Current	500mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	



Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




LED STANDING SPOT LIGHT

L00739



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø62mm
PowerConsumption	3W
LuminousFlux	350lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	15° 38°
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

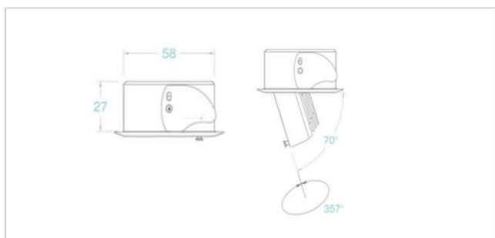

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.




JET-GLORY Lighting E: info@jet-glory.com T: +86 769 8801 1804

JET-GLORY LIGHTING Jewelry Lights

L00740



LightSource	Cree LED
Colour RenderingIndex	> 90
Colour Temperature	3000K or 4000K or 5000K
Colour Finish	Silver or Black
PowerFactor	> 0.9
CutOut	Ø43mm
PowerConsumption	3W
LuminousFlux	300lm
Lifetime	50,000hours
IP-code	IP20
Beam Angle	15°/25°/45°/60°
Voltage/current	10V DC
Output Current	350mA
HousingMaterial	DieCast Aluminum
Warranty	5years
Patent No.	
Certification	

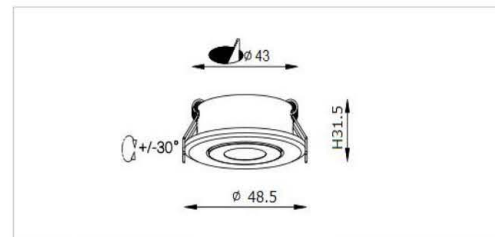

Application:

adjustable luminaire, with ring nut mounting, for indoor use. Suitable to light up showcases or cabinets. thin light, small volume, almost invisible to the eyes. possibility to adjust the light emission in all directions, it can be installed on the base, the wall or the ceiling of a showcase.



JET-GLORY Lighting E: info@jet-glory.com T: +86 769 8801 1804