



58 pullout  
L04201 7W 001



77 pullout  
L04201 12W 001



97 pullout  
L04201 25W 001



55 pullout  
L04208 7W 001



75 pullout  
L04208 12W 002



95 pullout  
L04208 25W 002



129x68 pullout  
L04202 14W 002



180x91 pullout  
L04202 24W 002



225x111 pullout  
L04202 40W 003



58x58 pullout  
L04203 7W 003



77x77 pullout  
L04203 12W 003



97x97 pullout  
L04203 20W 003



120x62 pullout  
L04204 14W 004



167x80 pullout  
L04204 24W 004



209x97 pullout  
L04204 50W 004



165x58 pullout  
L04206 21W 004



225x77 pullout  
L04206 36W 005



287x97 pullout  
L04206 75W 005



111x111 pullout  
L04207 28W 005



153x153 pullout  
L04207 48W 005



192x192 pullout  
L04207 80W 006



126x65 pullout  
L04209 14W 006



178x88 pullout  
L04209 24W 006



223x109 pullout  
L04209 40W 006



55x55 pullout  
L04210 7W 007



75x75 pullout  
L04210 12W 007



95x95 pullout  
L04210 20W 007



120x60 pullout  
L04211 14W 007



164x77 pullout  
L04211 24W 008



207x95 pullout  
L04211 50W 008



109x55 pullout  
L04212 14W 008



150x75 pullout  
L04212 24W 008



190x95 pullout  
L04212 50W 009



163x55 pullout  
L04213 21W 009



222x75 pullout  
L04213 36W 009



284x95 pullout  
L04213 75W 009



109x109 pullout  
L04214 28W 010



150x150 pullout  
L04214 48W 010



190x190 pullout  
L04214 100W 010



50 pullout  
L03239 7W 011



65 pullout  
L03239 10W 011



120 pullout  
L03239 25W 011



140 pullout  
L03239 35W 011



120 pullout  
L02098 25W 012



120\*230 pullout  
L02099 50W 012



120\*335 pullout  
L02100 75W 012



75  
L03161 12W 013



90  
L03161 15W 013



115  
L03161 30W 013



75x75  
L02095 12W 013



90x90  
L02095 15W 014



115x115  
L02095 30W 014



75x130  
L02096 24W 014



90x165  
L02096 30W 014



115x215  
L02096 60W 015



70 pullout  
L04231 6W 017



56 pullout  
L04230 6W 017



137 pullout  
L04235 12W 017



147 pullout  
L04236 18W 017



70 pullout  
L04222 6W 018



52 pullout  
L04221 6W 018



130x130 pullout  
L04226 12W 018



140\*140 pullout  
L04227 18W 018



127x68 pullout  
L04234 12W 019



188x68 pullout  
L04233 18W 019



130x130 pullout  
L04234 24W 019



127x68 pullout  
L04237 12W 019



188x68 pullout  
L04238 18W 020



65x65 pullout  
L04242 6W 020



133x65 pullout  
L04243 12W 020



200x65 pullout  
L04244 18W 020



130x68 pullout  
L04223 12W 021



188x68 pullout  
L04224 18W 021



130x130 pullout  
L04225 24W 021



130x68 pullout  
L04228 12W 021



188x68 pullout  
L04229 18W 022



65x65 pullout  
L04239 6W 022



130x65 pullout  
L04240 12W 022



200x65 pullout  
L04241 18W 022



130x65 pullout  
L04240 12W 023




200x65 pullout  
L04241 18W 023




# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L04201 - 7




power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	58xH86	1	 IP44 DALI  FLICKER FREE 220-240V 50/60Hz  CRI >97

L04201 - 12




power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	77xH104	1	 IP44 DALI  FLICKER FREE 220-240V 50/60Hz  CRI >97

L04201 - 25



power	driver	lumen	size(mm)	LEDs	beam angle
25W	625mA	2125lm 4000K	97xH127	1	 IP44 DALI  FLICKER FREE 220-240V 50/60Hz  CRI >97

L04208 - 7



power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	61.6xH86	1	 IP44 DALI  FLICKER FREE 220-240V 50/60Hz  CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.

 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04208 -12




power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	84xH104	1	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04208 -25




power	driver	lumen	size(mm)	LEDs	beam angle
25W	625mA	2125lm 4000K	110xH127	1	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04202 -14
















power	driver	lumen	size(mm)	LEDs	beam angle
14W	350mA	1190lm 4000K	129x68xH91	2	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04202 -24



power	driver	lumen	size(mm)	LEDs	beam angle
24W	600mA	2040lm 4000K	180x91xH116	2	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					


Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.  
002




# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L04202 - 40




power	driver	lumen	size(mm)	LEDs	beam angle
40W	1000mA	3400lm 4000K	225x111xH142	2	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04203 - 7



power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	58x58xH94	1	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04203 - 12



power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	77x77xH116	1	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04203 - 20




power	driver	lumen	size(mm)	LEDs	beam angle
20W	500mA	1700lm 4000K	97x97xH144	1	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

\*It allows you to match the fixture with its surroundings.


 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04204 -14




power	driver	lumen	size(mm)	LEDs	beam angle
14W	350mA	1190lm 4000K	120x62xH91	2	 <b>IP44 DALI</b>  <b>FLICKER FREE</b> 

L04204 -24




power	driver	lumen	size(mm)	LEDs	beam angle
24W	600mA	2040lm 4000K	167x80xH116	2	 <b>IP44 DALI</b>  <b>FLICKER FREE</b> 

L04204 -50
















power	driver	lumen	size(mm)	LEDs	beam angle
50W	1250mA	4250lm 4000K	209x97xH142	2	 <b>IP44 DALI</b>  <b>FLICKER FREE</b> 

L04206 -21




power	driver	lumen	size(mm)	LEDs	beam angle
21W	525mA	1785lm 4000K	165x58xH94	3	 <b>IP44 DALI</b>  <b>FLICKER FREE</b> 

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 <b>Linear Spread</b>  <b>Hex Louver</b>  <b>Prismatic Spread</b>  <b>Softening Lens</b>	 <b>Matt white</b>  <b>Matt black</b> Customized	 <b>2700K</b>  <b>3000K</b>  <b>4000K</b>  <b>5000K</b>	CRI90+

\*It allows you to match the fixture with its surroundings.  
004


 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04206 - 36

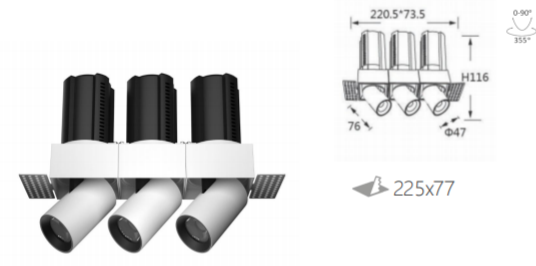


power	driver	lumen	size(mm)	LEDs	beam angle
36W	900mA	3060lm 4000K	225x77xH116	3	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04206 - 75

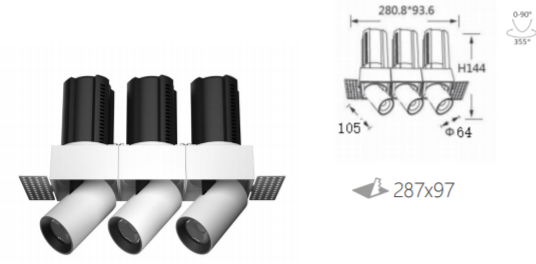


power	driver	lumen	size(mm)	LEDs	beam angle
75W	1875mA	6375lm 4000K	287x97xH144	3	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04207 - 28

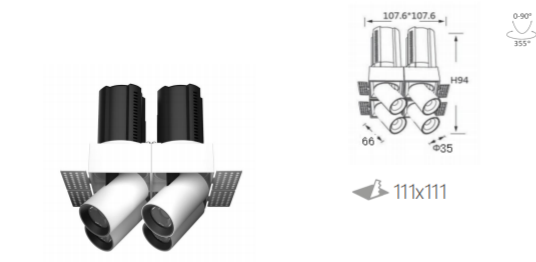





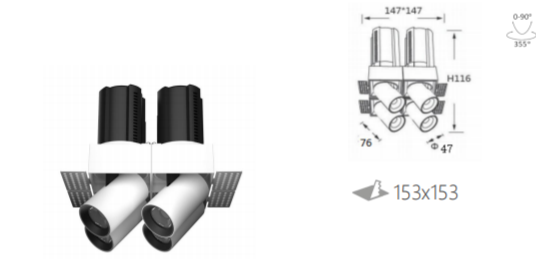








power	driver	lumen	size(mm)	LEDs	beam angle
28W	700mA	2380lm 4000K	111x111xH94	4	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04207 - 48



power	driver	lumen	size(mm)	LEDs	beam angle
48W	1200mA	4080lm 4000K	153x153xH116	4	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					


Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.




# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L04207 -80




power	driver	lumen	size(mm)	LEDs	beam angle
80W	2000mA	6800lm 4000K	192x192xH144	4	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04209 -14




power	driver	lumen	size(mm)	LEDs	beam angle
14W	350mA	1190lm 4000K	139.5x78.5xH91	2	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04209 -24



power	driver	lumen	size(mm)	LEDs	beam angle
24W	600mA	2040lm 4000K	193.8x104.3xH116	2	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04209 -40



power	driver	lumen	size(mm)	LEDs	beam angle
40W	1000mA	3400lm 4000K	238.5x124.5xH142	2	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+


\*It allows you to match the fixture with its surroundings.






# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L04210 - 7




power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	63.5x63.5xH94	1	 15° 26° 36° 55° <b>IP44 DALI</b> <b>FLICKER FREE</b> 220-240V 50/60Hz <b>CRI &gt;97</b>

L04210 - 12




power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	84.5x84.5xH116	1	 15° 26° 36° 55° <b>IP44 DALI</b> <b>FLICKER FREE</b> 220-240V 50/60Hz <b>CRI &gt;97</b>

L04210 - 20



power	driver	lumen	size(mm)	LEDs	beam angle
20W	500mA	1700lm 4000K	104.5x104.5xH144	1	 15° 26° 36° 55° <b>IP44 DALI</b> <b>FLICKER FREE</b> 220-240V 50/60Hz <b>CRI &gt;97</b>

L04211 - 14




power	driver	lumen	size(mm)	LEDs	beam angle
14W	350mA	1190lm 4000K	129.5x68.5xH91	2	 15° 26° 36° 55° <b>IP44 DALI</b> <b>FLICKER FREE</b> 220-240V 50/60Hz <b>CRI &gt;97</b>


Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 <b>Linear Spread</b>  <b>Hex Louver</b>  <b>Prismatic Spread</b>  <b>Softening Lens</b>	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.


 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**




power	driver	lumen	size(mm)	LEDs	beam angle
24W	600mA	2040lm 4000K	180x90.5xH116	2	 <b>IP44 DALI</b>  <b>FLICKER FREE</b>   <b>CRI &gt;97</b>
















power	driver	lumen	size(mm)	LEDs	beam angle
50W	1250mA	4250lm 4000K	223.5x109.5xH142	2	 <b>IP44 DALI</b>  <b>FLICKER FREE</b>   <b>CRI &gt;97</b>



power	driver	lumen	size(mm)	LEDs	beam angle
14W	350mA	1190lm 4000K	117.5x63.5xH94	2	 <b>IP44 DALI</b>  <b>FLICKER FREE</b>   <b>CRI &gt;97</b>




power	driver	lumen	size(mm)	LEDs	beam angle
24W	600mA	2040lm 4000K	158x84.5xH116	2	 <b>IP44 DALI</b>  <b>FLICKER FREE</b>   <b>CRI &gt;97</b>

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 <b>Linear Spread</b>  <b>Hex Louver</b>  <b>Prismatic Spread</b>  <b>Softening Lens</b>	 <b>Matt white</b>  <b>Matt black</b> Customized	 <b>2700K</b>  <b>3000K</b>  <b>4000K</b>  <b>5000K</b>	CRI90+

\*It allows you to match the fixture with its surroundings.


 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04212 - 50




power	driver	lumen	size(mm)	LEDs	beam angle
50W	1250mA	4250lm 4000K	198x104.5xH144	2	  

L04213 - 21




power	driver	lumen	size(mm)	LEDs	beam angle
21W	525mA	1785lm 4000K	171x63.5xH94	3	  

L04213 - 36
















power	driver	lumen	size(mm)	LEDs	beam angle
36W	900mA	3060lm 4000K	231.5x84.5xH116	3	  

L04213 - 75




power	driver	lumen	size(mm)	LEDs	beam angle
75W	1875mA	6375lm 4000K	293.5x104.5xH143	3	  

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.  
009


 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04214 -28




power	driver	lumen	size(mm)	LEDs	beam angle
28W	700mA	2380lm 4000K	117.5x117.5xH94	4	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04214 -48
















power	driver	lumen	size(mm)	LEDs	beam angle
48W	1200mA	4080lm 4000K	158x158xH116	4	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04214 -100



power	driver	lumen	size(mm)	LEDs	beam angle
100W	2500mA	8500lm 4000K	198x198xH144	4	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.  
010



# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L03239 - 7



50mm



power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	60*H110	1	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L03239 - 10



65mm



power	driver	lumen	size(mm)	LEDs	beam angle
10W	250mA	850lm 4000K	72*H110	1	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L03239 - 25



120mm



power	driver	lumen	size(mm)	LEDs	beam angle
25W	625mA	2125lm 4000K	130*H135	1	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L03239 - 35



140mm



power	driver	lumen	size(mm)	LEDs	beam angle
35W	875mA	2975lm 4000K	160*H155	1	15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.



# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L02098 -25




120mm



power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

25W	625mA	2125lm 4000K	130*130*H135	1	
-----	-------	--------------	--------------	---	--



IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L02099 -50




120\*230



power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

50W	1250mA	4250lm 4000K	130*240*H135	2	
-----	--------	--------------	--------------	---	--



IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L02100 -75




120\*335



power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

75W	1875mA	6375lm 4000K	130*345*H135	3	
-----	--------	--------------	--------------	---	--



IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.



# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L03161 - 12



75mm



power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	85xH38	1	15° 26° 36° 55°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L03161 - 15



90mm



power	driver	lumen	size(mm)	LEDs	beam angle
15W	375mA	1275lm 4000K	100xH38	1	15° 26° 36° 55°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L03161 - 30



115mm



power	driver	lumen	size(mm)	LEDs	beam angle
30W	750mA	2550lm 4000K	130xH43	1	15° 26° 36° 55°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L02095 - 12



75x75



power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	85x85xH38	1	15° 26° 36° 55°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	   	  Customized	   	CRI90+

\*It allows you to match the fixture with its surroundings.

 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L02095 -15



 90x90



power	driver	lumen	size(mm)	LEDs	beam angle
15W	375mA	1275lm 4000K	100x100xH38	1	  

L02095 -30



 115x115



power	driver	lumen	size(mm)	LEDs	beam angle
30W	750mA	2550lm 4000K	130x130xH43	1	  

L02096 -24



 75x130



power	driver	lumen	size(mm)	LEDs	beam angle
24W	600mA	2040lm 4000K	85x140xH38	2	  














L02096 -30



 90x165



power	driver	lumen	size(mm)	LEDs	beam angle
30W	750mA	2550lm 4000K	100x175xH38	2	  

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.





# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L02096 - 60




115x215



power	driver	lumen	size(mm)	LEDs	beam angle
-------	--------	-------	----------	------	------------

60W	1500mA	5100lm 4000K	130x230xH43	2	
-----	--------	--------------	-------------	---	--



IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 Linear Spread  Hex Louver  Prismatic Spread  Softening Lens	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.





**INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04231 - 6




power	driver	lumen	size(mm)	LEDs	beam angle
6W	150mA	510lm 4000K	114xH125	1	15° 26° 36° 55°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04230 - 6




power	driver	lumen	size(mm)	LEDs	beam angle
6W	150mA	510lm 4000K	107xH118	1	15° 26° 36° 55°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04235 - 12




power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	203xH123	2	15° 26° 36° 55°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04236 - 18



power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	203xH123	3	15° 26° 36° 55°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97


Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	   	  Customized	   	CRI90+

\*It allows you to match the fixture with its surroundings.




# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L04222 -6




power	driver	lumen	size(mm)	LEDs	beam angle
6W	150mA	510lm 4000K	80*H125	1	

L04221 -6




power	driver	lumen	size(mm)	LEDs	beam angle
6W	150mA	510lm 4000K	58*H118	1	

L04226 -12



power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	146x146xH125	2	

L04227 -18




power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	146x146xH125	3	

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  		Customized		CRI90+

\*It allows you to match the fixture with its surroundings.


 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04232 - 12

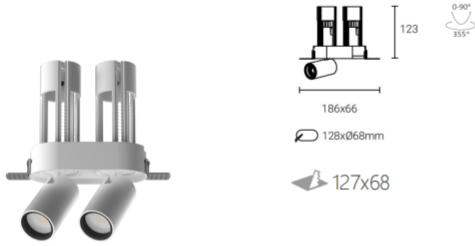


power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	172x68xH125	2	  

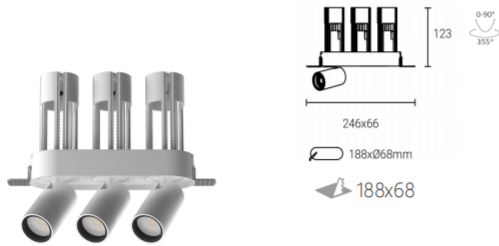


L04233 - 18




power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	234x68xH125	3	  

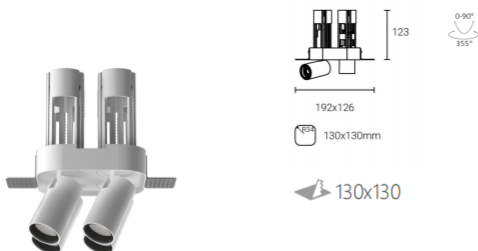L04234 - 24







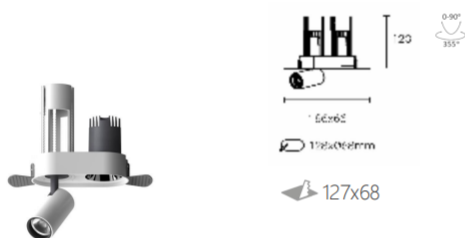








power	driver	lumen	size(mm)	LEDs	beam angle
24W	600mA	2040lm 4000K	140x140xH125	4	  

L04237 - 12



power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	172x68xH125	2	  


Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	   	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.  
019




# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L04238 -18




power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	234x68xH125	3	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04242 -6




power	driver	lumen	size(mm)	LEDs	beam angle
6W	150mA	510lm 4000K	38x140x123	1	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04243 -12



power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	38x206x123	2	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					

L04244 -18



power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	38x272x123	3	 15° 26° 36° 55°
IP44 DALI  FLICKER FREE					
220-240V 50/60Hz  3-20mm  CRI >97					


Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

\*It allows you to match the fixture with its surroundings.




# INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT

L04223 - 12




power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	140x80xH125	2	

L04224 - 18




power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	234x68xH125	3	

L04225 - 24



power	driver	lumen	size(mm)	LEDs	beam angle
24W	600mA	2040lm 4000K	140x140xH125	4	

L04228 - 12




power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	140x80xH125	2	

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	   	  Customized	   	CRI90+

\*It allows you to match the fixture with its surroundings.


 **INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04229 -18




power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	234x68xH125	3	  

L04239 -6




power	driver	lumen	size(mm)	LEDs	beam angle
6W	150mA	510lm 4000K	50x38x123	1	  

L04240 -12
















power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	50x38x123	2	  

L04241 -18



power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	140x63x123	3	  

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 <b>Linear Spread</b>  <b>Hex Louver</b>  <b>Prismatic Spread</b>  <b>Softening Lens</b>	 <b>Matt white</b>  <b>Matt black</b> Customized	 <b>2700K</b>  <b>3000K</b>  <b>4000K</b>  <b>5000K</b>	CRI90+


\*It allows you to match the fixture with its surroundings.






**INTERIOR LED RECESSED DOWN SPOTLIGHT PULLOUT**

L04240 - 12



power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	50x38x123	2	 15° 26° 36° 55° <b>IP44 DALI</b> <b>FLICKER FREE</b> 220-240V 50/60Hz  3-20mm <b>CRI &gt;97</b>

L04241 - 18



power	driver	lumen	size(mm)	LEDs	beam angle
18W	450mA	1530lm 4000K	140x63x123	3	 15° 26° 36° 55° <b>IP44 DALI</b> <b>FLICKER FREE</b> 220-240V 50/60Hz  3-20mm <b>CRI &gt;97</b>

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	  	 <b>Linear Spread</b>  <b>Hex Louver</b>  <b>Prismatic Spread</b>  <b>Softening Lens</b>	 Matt white  Matt black Customized	 2700K  3000K  4000K  5000K	CRI90+

\*It allows you to match the fixture with its surroundings.