



PARKER

2023 NEW PRODUCTS LAUNCH



Parker

Extremely narrow edge design

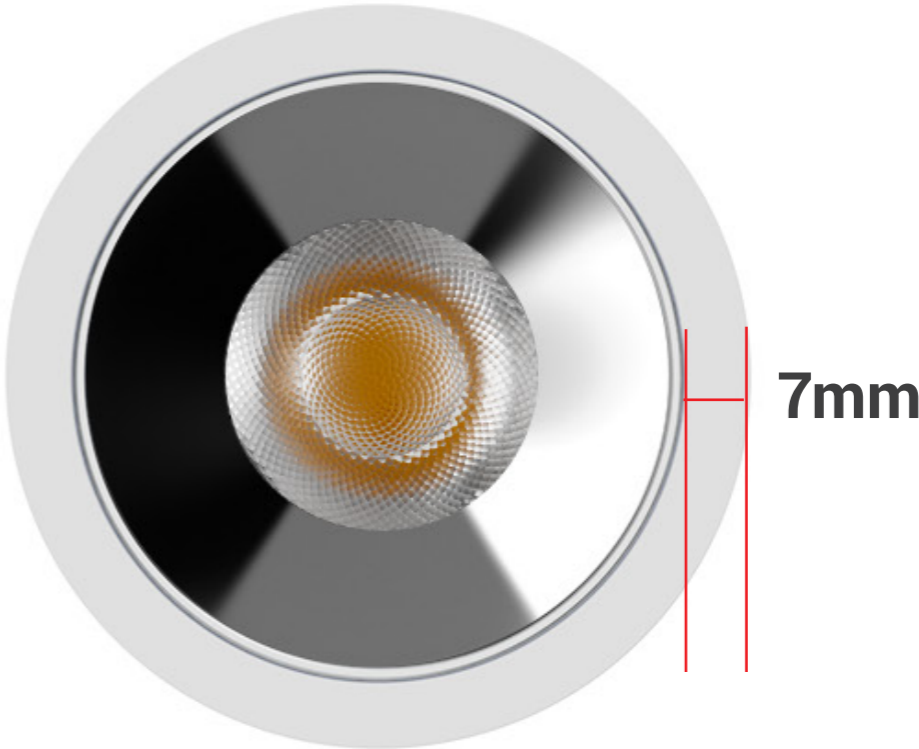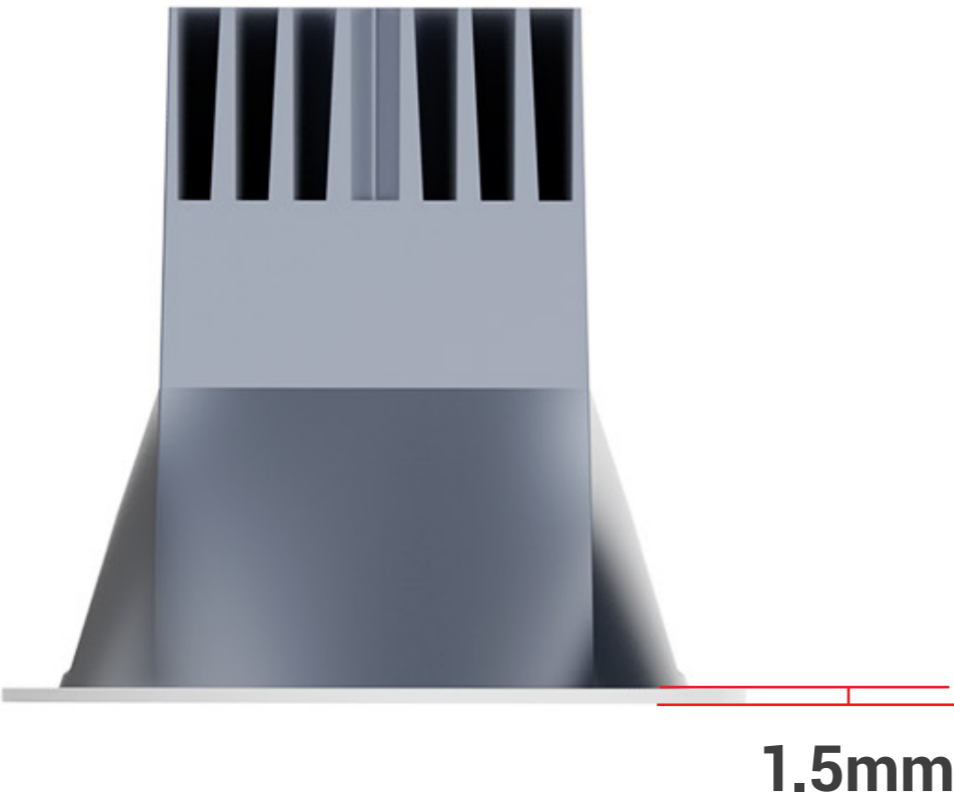


Parker

Square and Round design



Simple and neat appearance,
Create a personal profile and a pioneering style

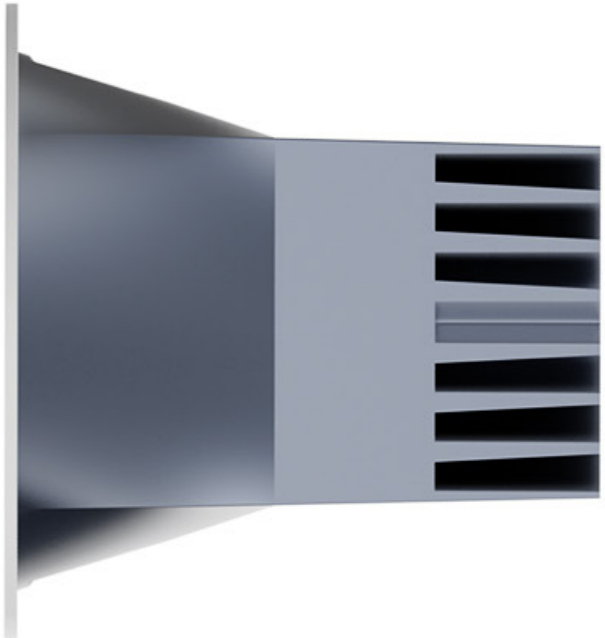

Parker




Parker



No stray light, round spot

No secondary light spot, pure and clear
Uniform light spot transition, more soft and comfortable

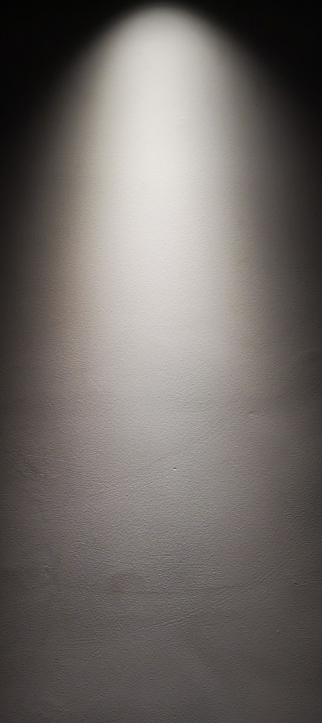











Light spot effect

8°	10°	15°	24°	36°	50°






INTERIOR LED RECESSED SPOTLIGHT

L03724






















-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR < 13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

Code	System Power W	Dimension mm	Cutout mm 	Output lm	LEDs pc	
L03724 -6	6W	52xH55	Ø45	426lm 4000K CRI90+	1 PCS	
L03724 -8	8W	65xH61	Ø55	568lm 4000K CRI90+	1 PCS	
L03724 -10	10W	75xH70	Ø65	710lm 4000K CRI90+	1 PCS	
L03724 -12	12W	85xH80	Ø75	852lm 4000K CRI90+	1 PCS	

Feature

It's Parker, integrated design for direct lighting scenes, Simplify and reinvent the classic easy installation, and the power is larger under the premise of the same size. IP54 and honeycomb can be customized, the lighting fixture is fixed, slim trim, die casting aluminium materials, the secondary optic offered high level of visual comfort. PMMA high luminous lens, No secondary light spot, pure and clear uniform light spot transition, more soft and comfortable. UGR < 13

Remote LED Driver	LED Chips	Accessories	Finishing	LED color	Beam Angle
6W 150mA 36V DC	 	     	 Matt white  Matt black	 2700K  3000K  4000K  5000K	 8°  15°  24°  36°  60°
8W 200mA 36V DC					
10W 250mA 36V DC					
12W 300mA 36V DC					
20W 500mA 36V DC					
35W 850mA 36V DC					

* Customization, It allows you to match the fixture with its surroundings.