



LINAN LIGHT


LINAN new upgrade



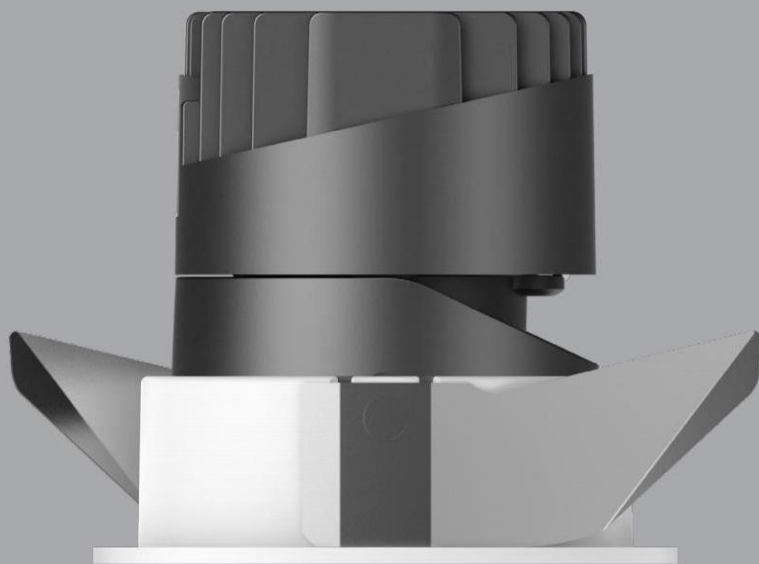


Direct

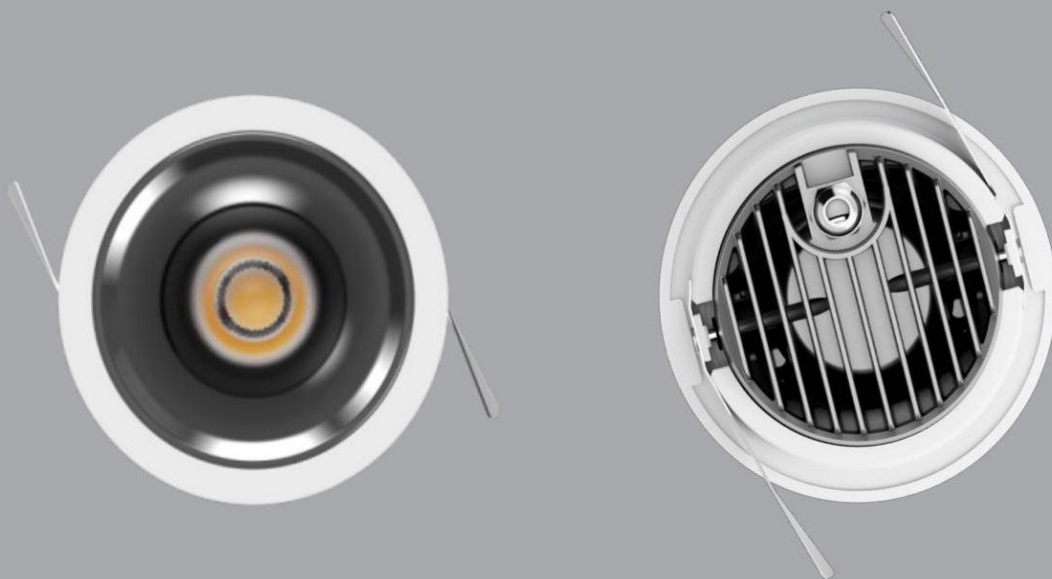


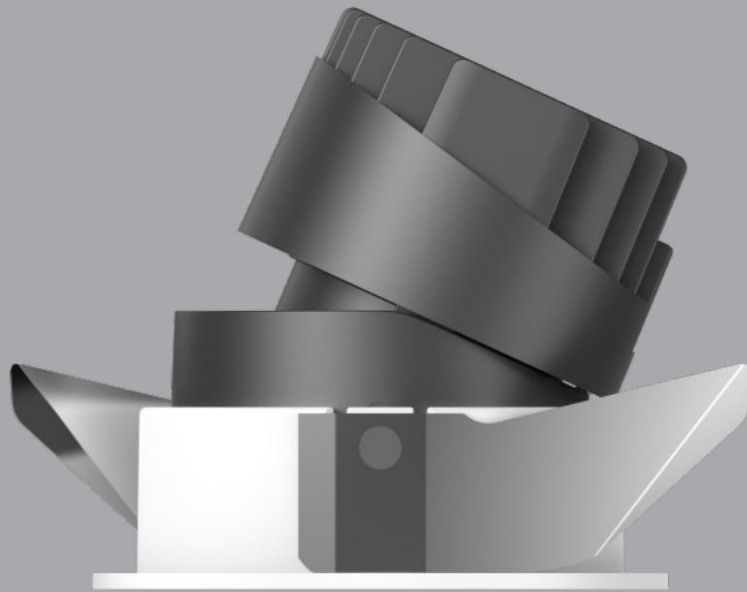


Adjustable

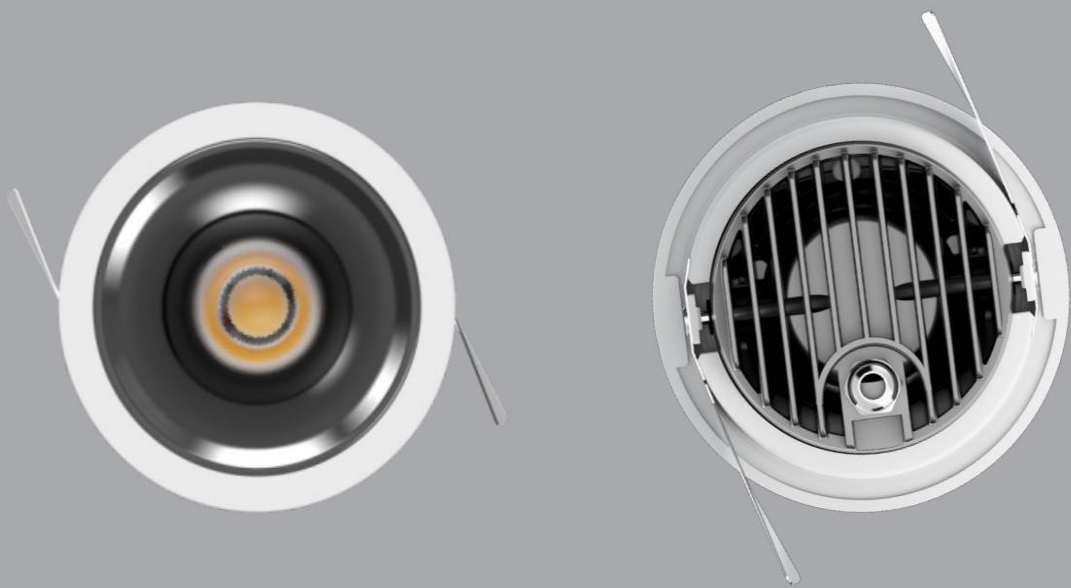

LINAN new upgrade

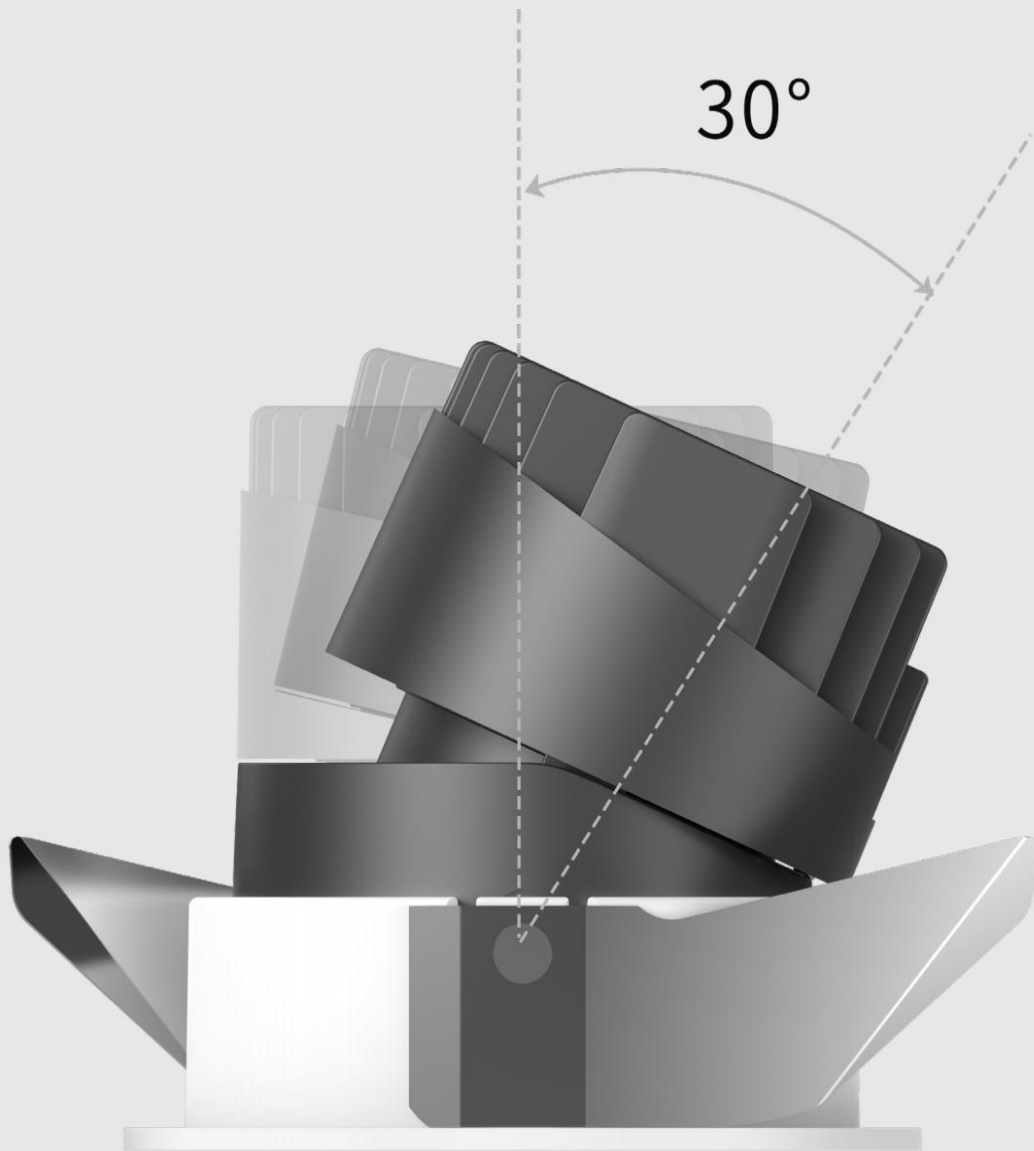


Stepless regulation **0~30°**
at any angle

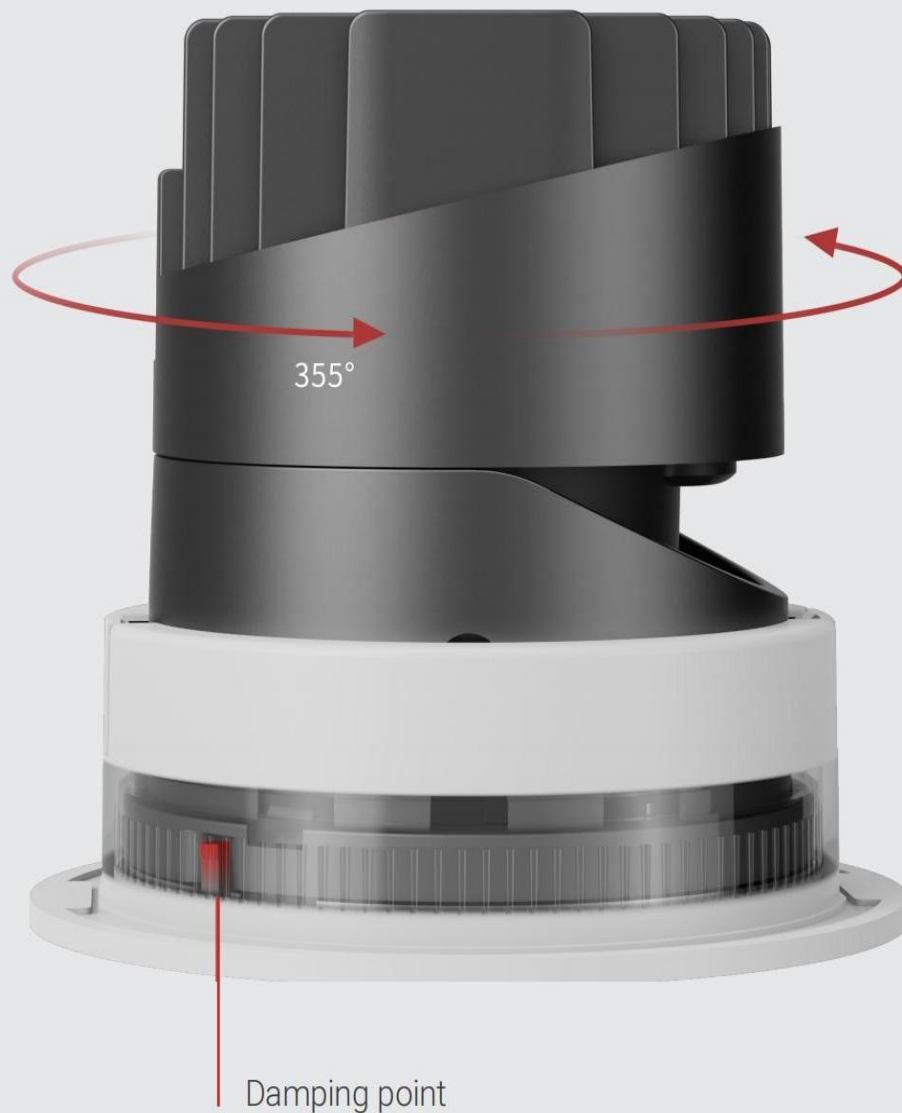

Positioning groove **355°** Horizontal rotation

Horizontal rotation of 355°, with positioning point, damping to Fool-proof and prevent winding.

Extremely Narrow Edge

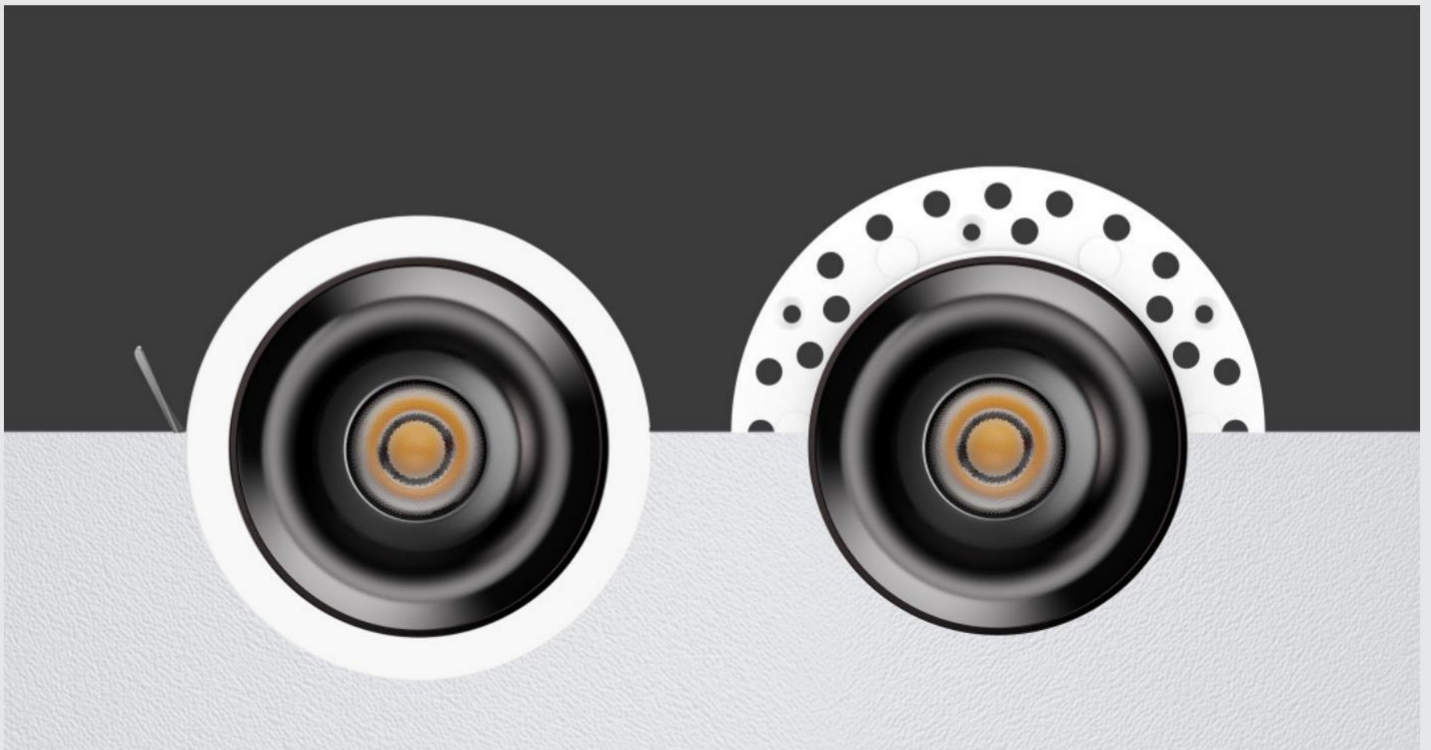


Integrated narrow edge

Integrated trimless




PMMA high luminous rate Ribbed structure lens

The ribbed structure design is adopted, with its own anti glare effect, so that the light is interwoven at the center of the upper end of the reflector, effectively reducing stray light, and the light spot transition is even, more soft and comfortable

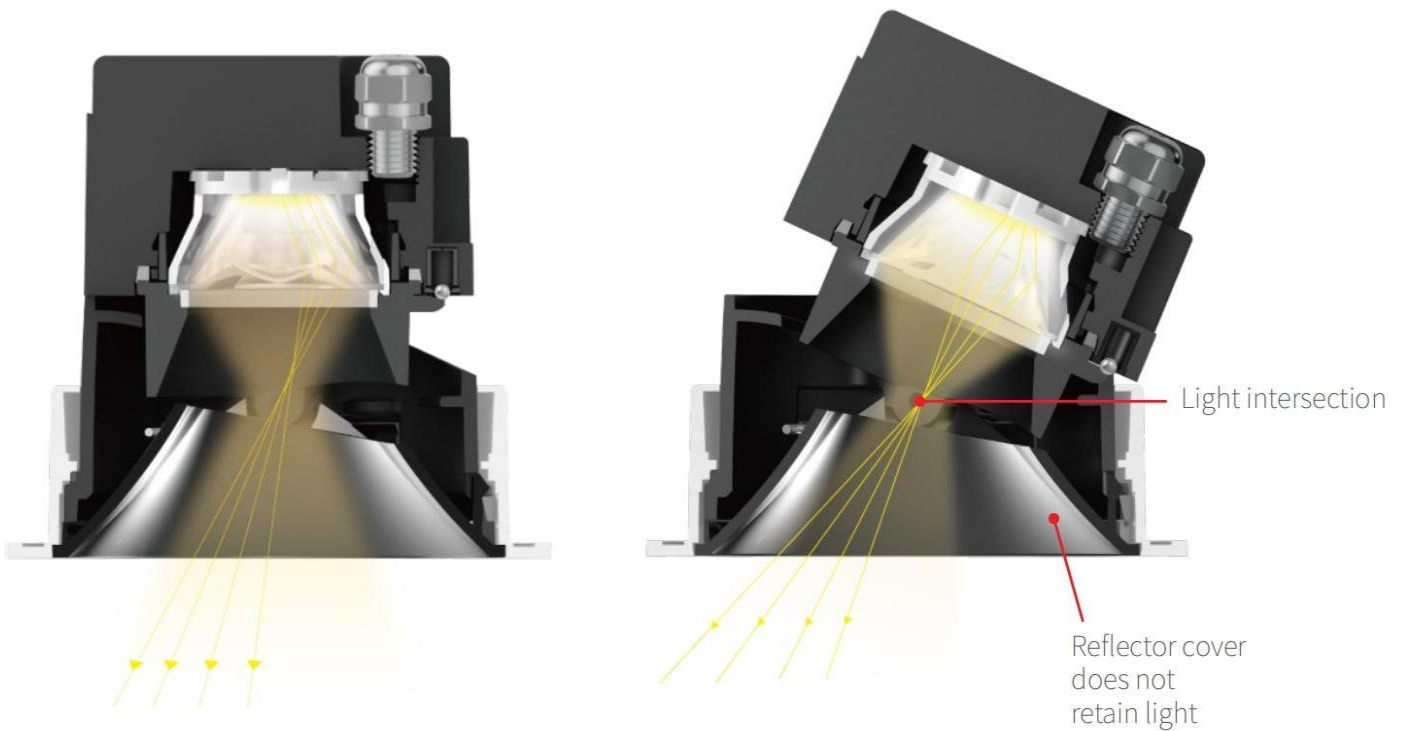

Optical Fitting On demand transformation

Five optical Fitting are optional, which can realize the change of spot shape,
full lamp UGR and other
technical parameters to meet the lighting needs of different scenes

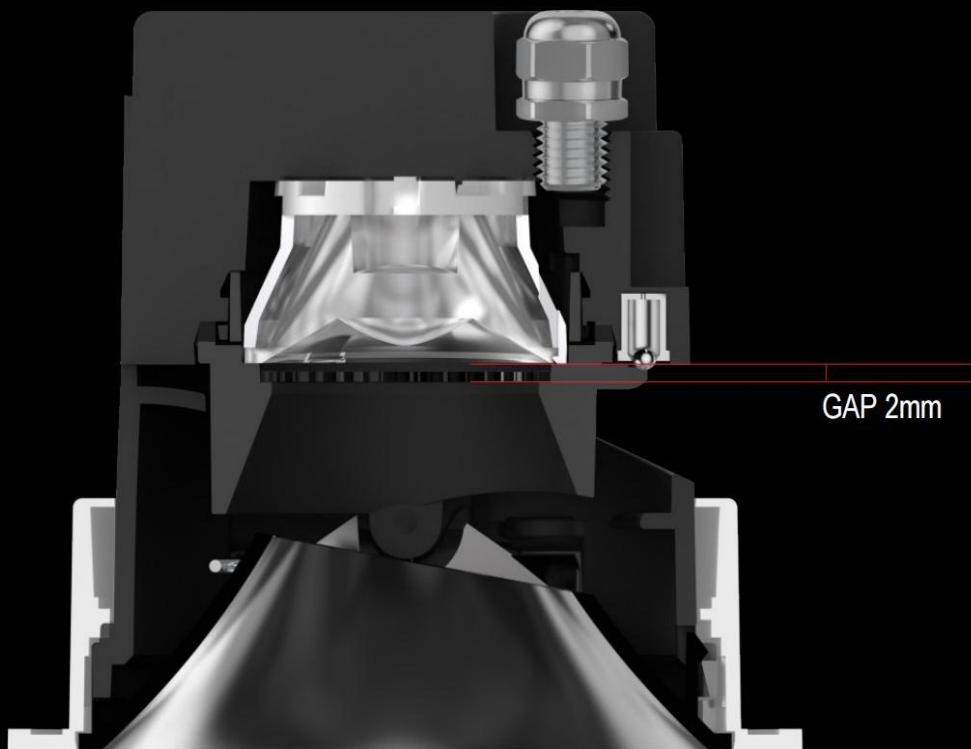




BVT optical film



Clear glass sheet



Stretching optical PC



Honeycomb



Anti dazzle ring
(Secondary facula removal at
small beam angle)




• Misty silver




• Matt white




• Mirror light color

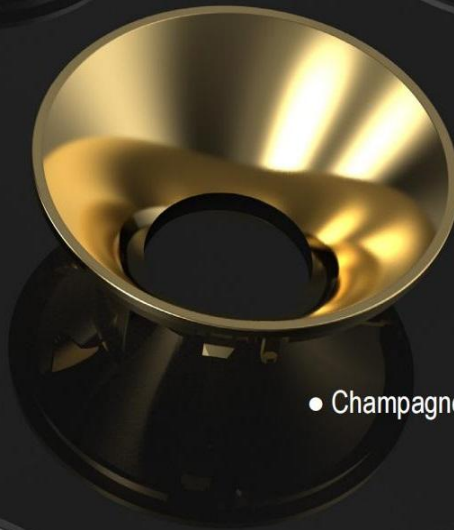

• Champagne gold

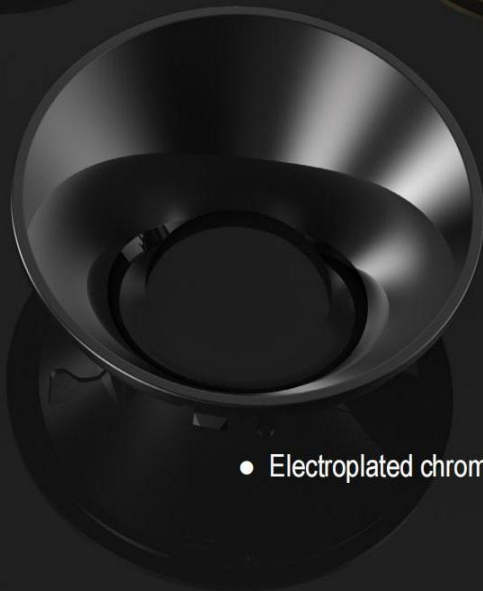

• Electroplated chrome black

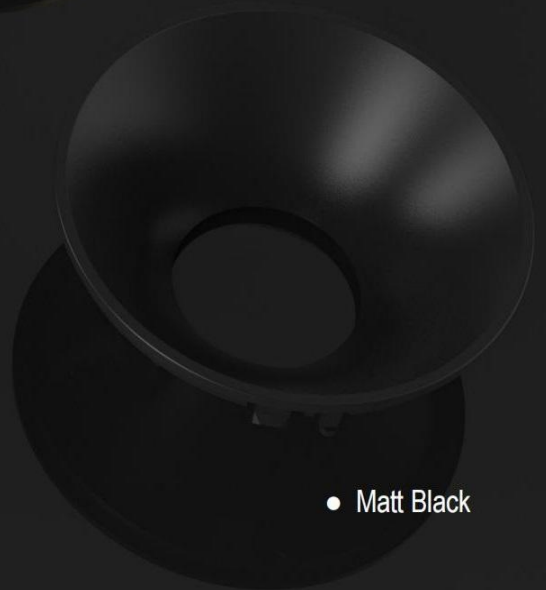


• Matt Black

No stray light, Round spot


No secondary light spot, pure and clear, uniform light spot transition,
more soft and comfortable


Light spot effect

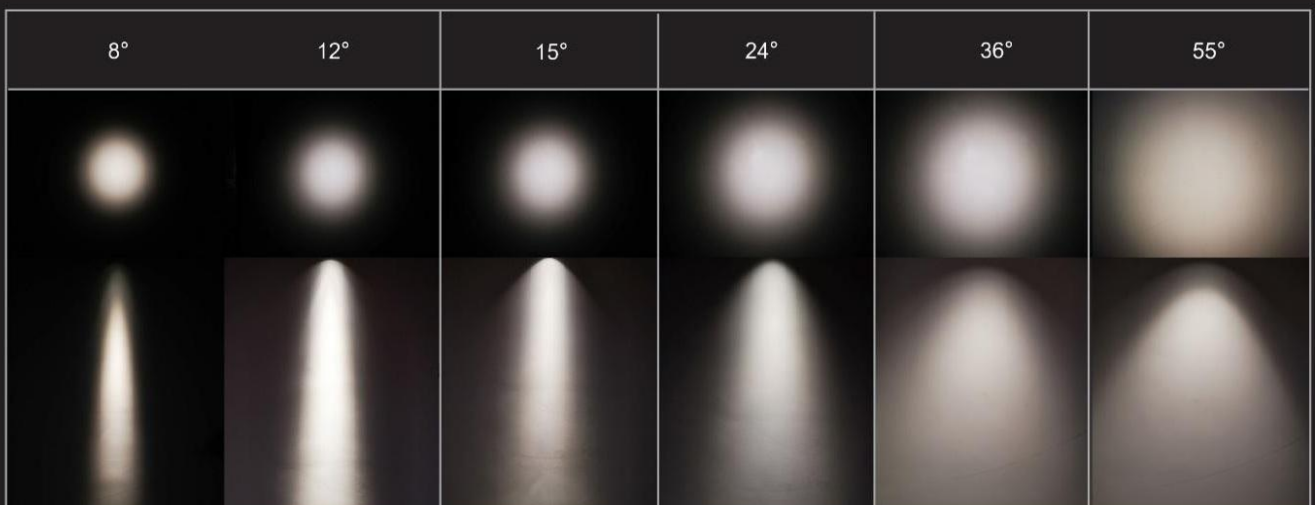

Radiator simulation

Die-casting aluminum heat dissipation structure, the heat is derived from the inner hole of the heatsink, and when the air flow rises from the inner hole, the heat is exported with the air.


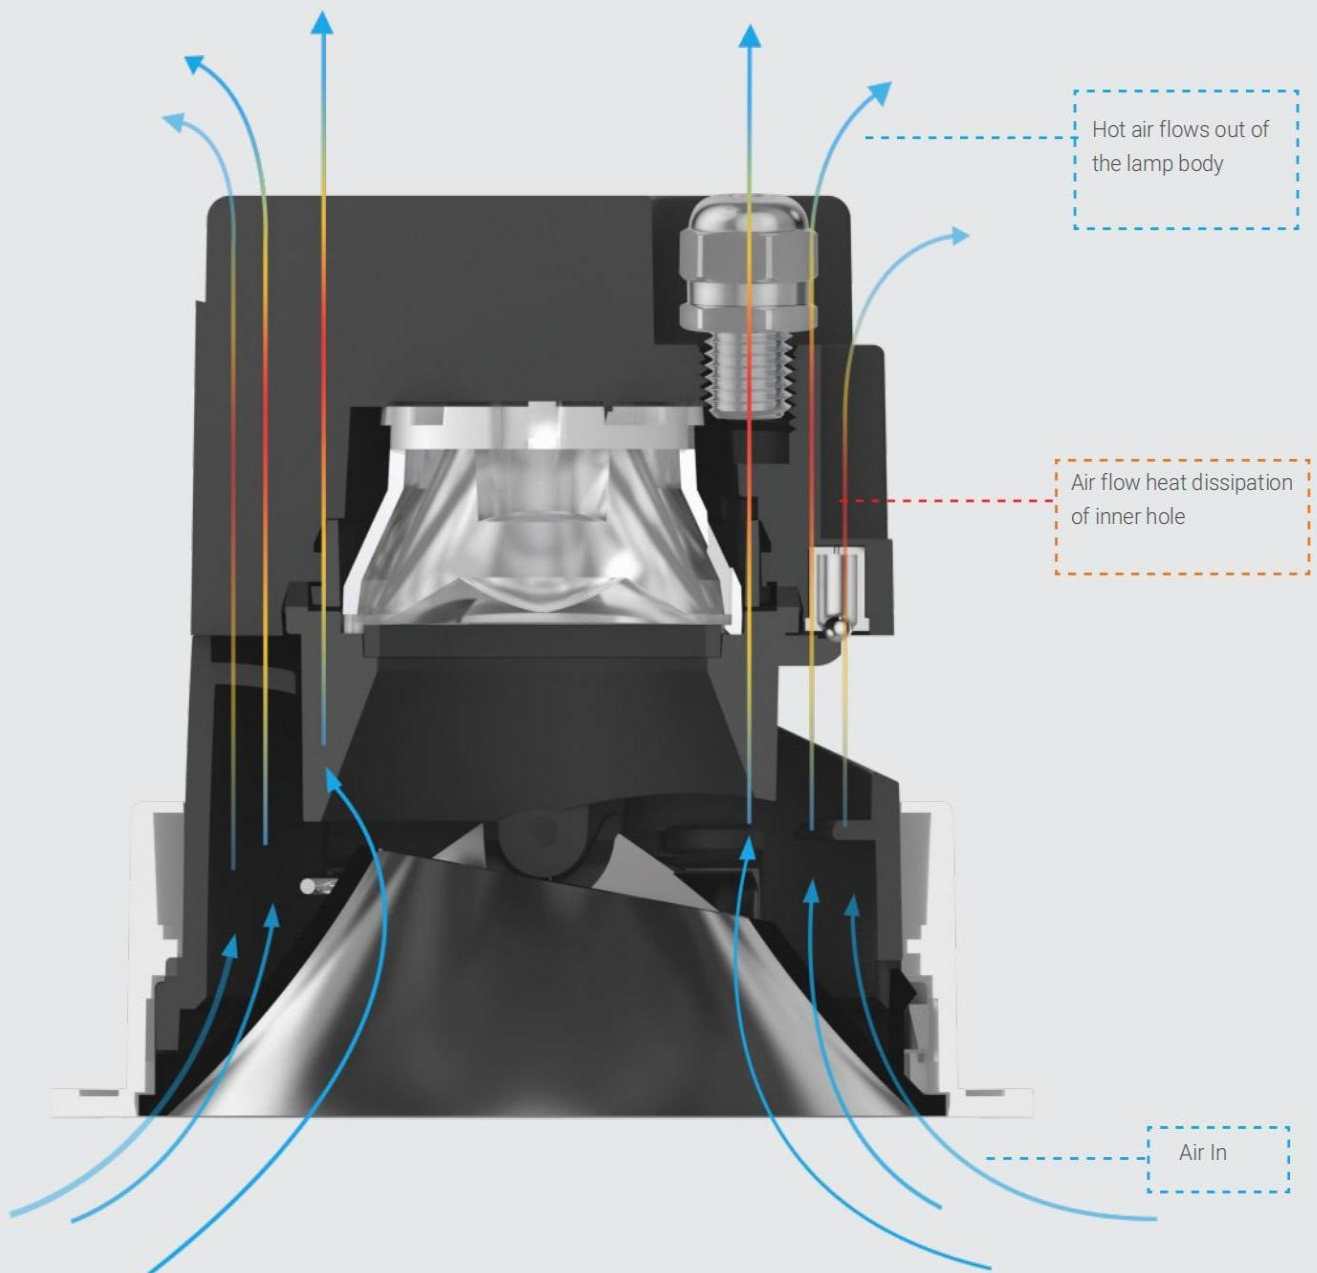


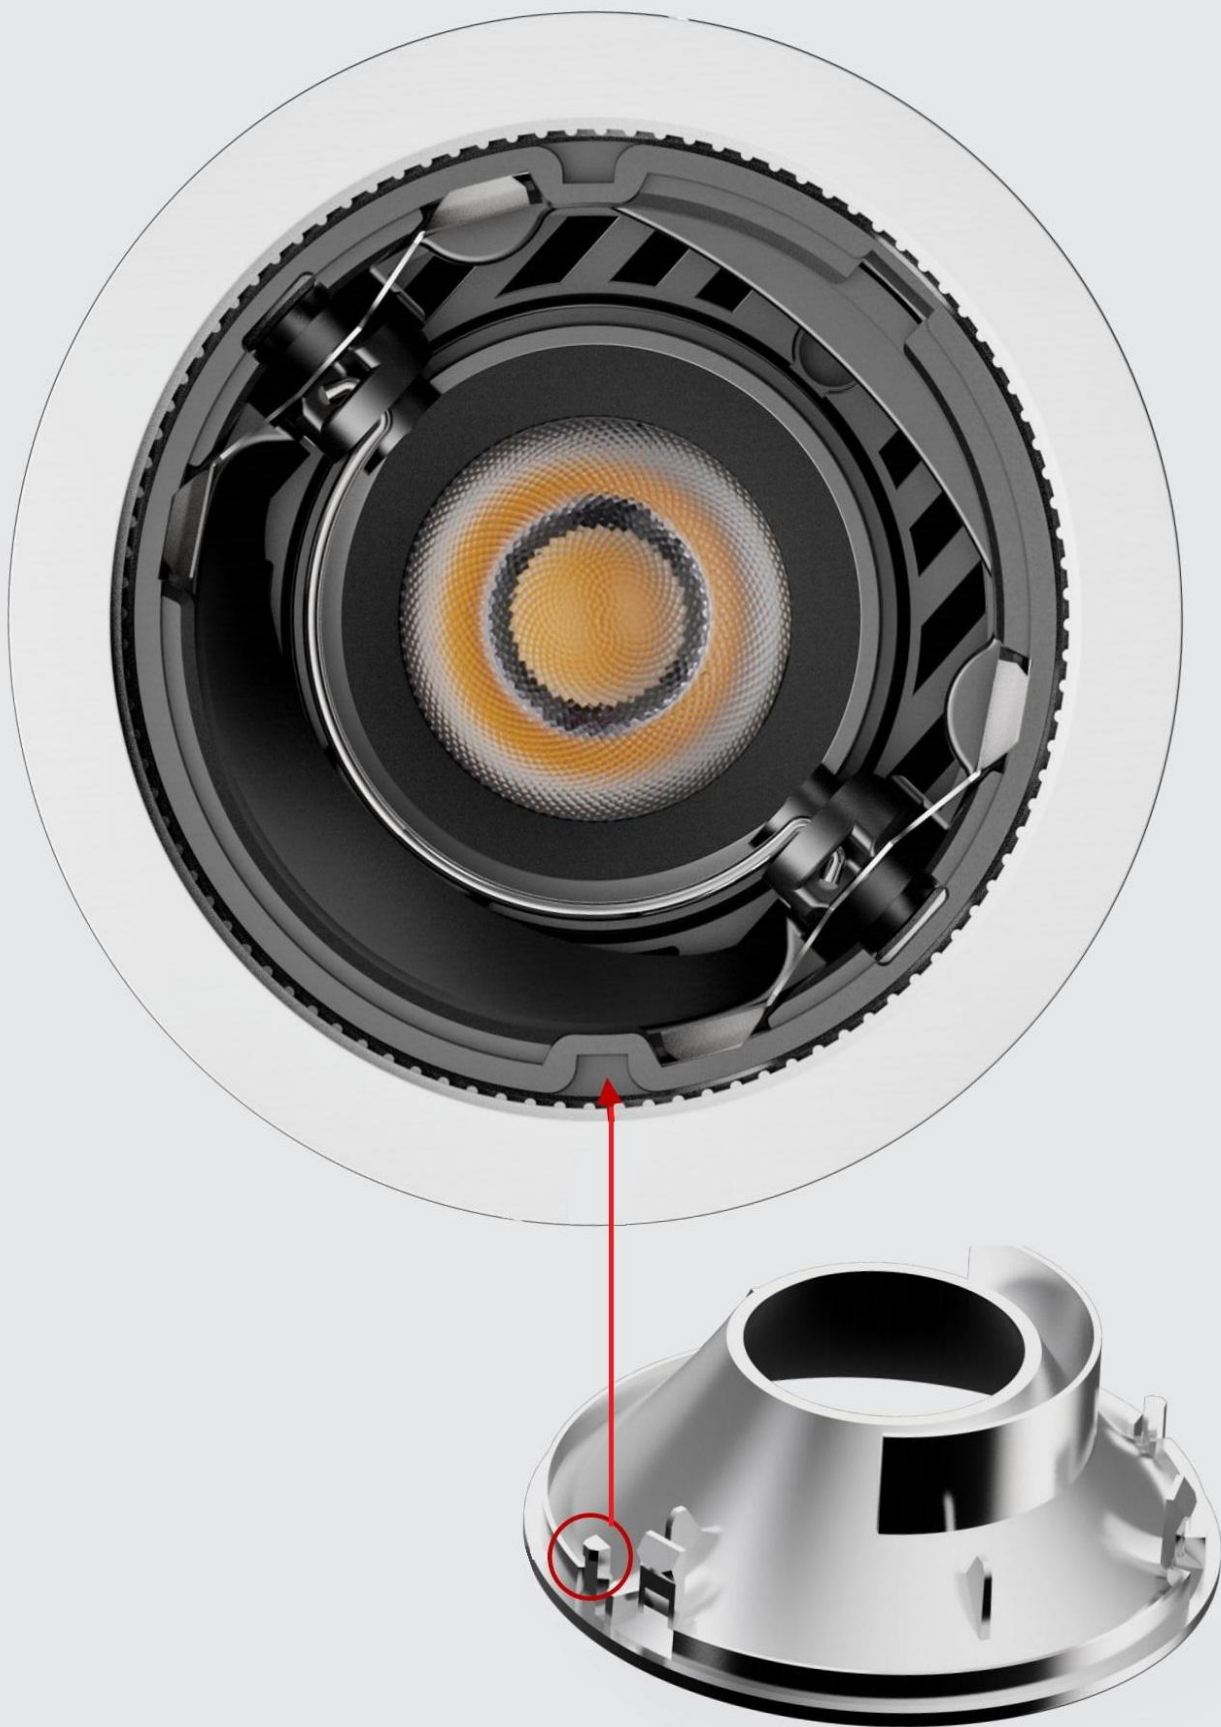

Fool-proof design

Snap the reflector cover into the marked hole, Effectively fool-proof

LINAN new upgrade

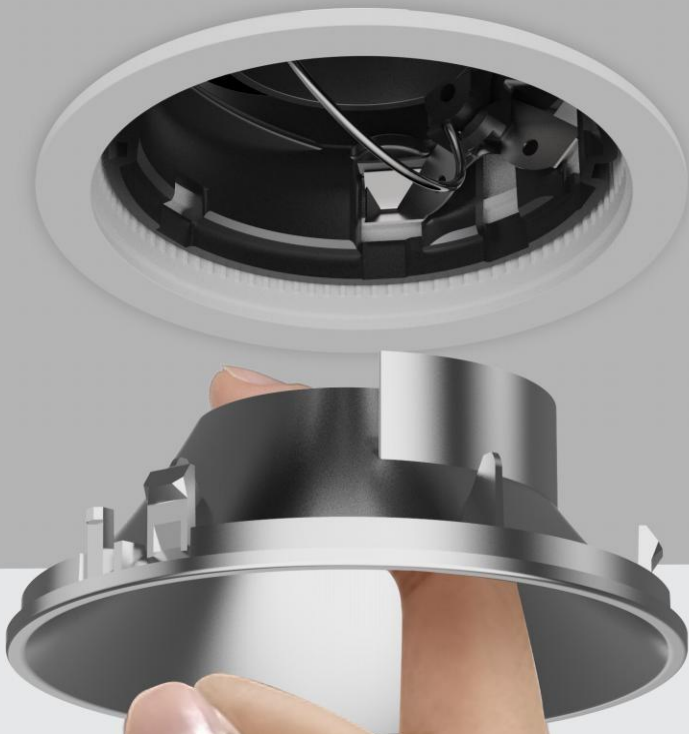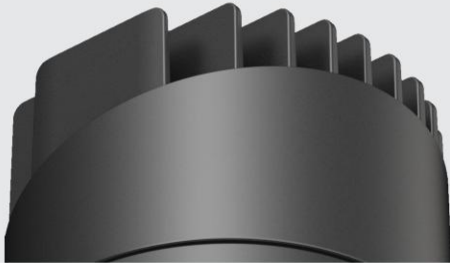


1

Take out reflector cover



2

Rotatable adjustment

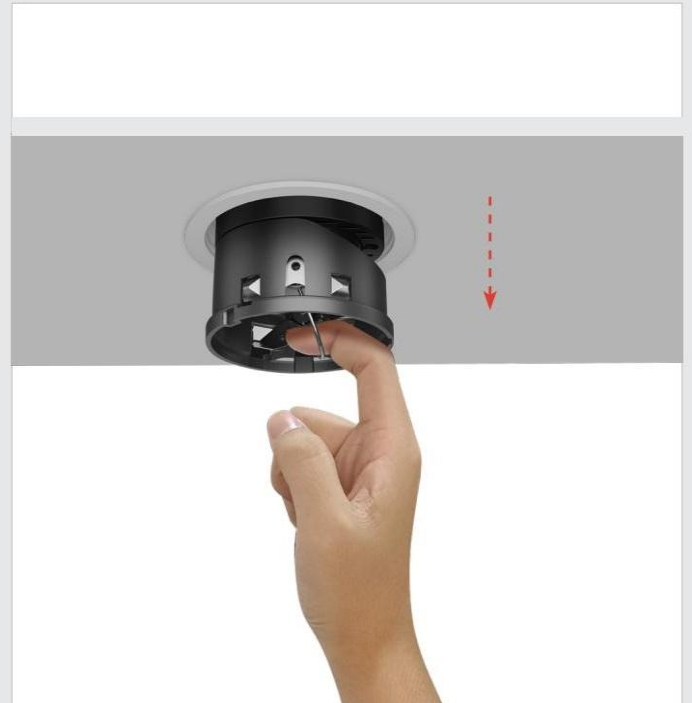

3

Pull out the module


Unique Pull handle design

Pull ring design, convenient
for tank adjustment and disassembly




L03724 IP44 013

6W Ø45
8W Ø55
10W Ø65
12W Ø75
20W Ø95



L06733 IP44 014

10W Ø65
12W Ø75



L06734 IP44 015

10W Ø65
12W Ø75




L06735 IP44 016

10W Ø65
12W Ø75



L06736 IP44 017

10W Ø65
12W Ø75



L06737 IP44 018

10W Ø65
12W Ø75



L06738 IP44 019

10W Ø65
12W Ø75



L06739 IP44 020

12W Ø75



L06740 IP44 021

12W Ø75



L06741 IP44 022

12W Ø75




L06742 IP44 023

12W 75x75




L06743 IP44 024

12W 75x75




L06744 IP44 025

12W 75x75



L06745 IP44 026

12W 75x75

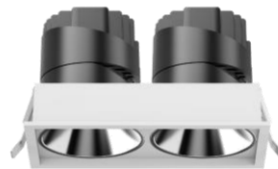

L06746 IP44 027

24W 150x75













L06747 IP44 028

24W 150x75






INTERIOR LED RECESSED SPOTLIGHT

L03724






















-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR < 13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------|--------------|---|-----------------------|---------|---|
| L03724 -6 | 6W | 52xH55 | Ø45 | 426lm 4000K CRI90+ | 1 PCS |  |
| L03724 -8 | 8W | 65xH61 | Ø55 | 568lm 4000K CRI90+ | 1 PCS |  |
| L03724 -10 | 10W | 75xH70 | Ø65 | 710lm 4000K CRI90+ | 1 PCS |  |
| L03724 -12 | 12W | 85xH80 | Ø75 | 852lm 4000K CRI90+ | 1 PCS |  |

Feature

It's Parker, integrated design for direct lighting scenes, Simplify and reinvent the classic easy installation, and the power is larger under the premise of the same size. IP54 and honeycomb can be customized, the lighting fixture is fixed, slim trim, die casting aluminium materials, the secondary optic offered high level of visual comfort. PMMA high luminous lens, No secondary light spot, pure and clear uniform light spot transition, more soft and comfortable. UGR < 13











| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|--|--|--|--|--|
| 6W 150mA 36V DC |   |       |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  8°  15°  24°  36°  60° |
| 8W 200mA 36V DC | | | | | |
| 10W 250mA 36V DC | | | | | |
| 12W 300mA 36V DC | | | | | |
| 20W 500mA 36V DC | | | | | |
| 35W 850mA 36V DC | | | | | |

* Customization, It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED SPOTLIGHT

L06733













-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR<13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------|--------------|---|-----------------------|---------|---|
| L06733 -10 | 10W | 73xH73 | Ø65 | 720lm 4000K CRI90+ | 1 PCS |  |
| L06733 -12 | 12W | 86xH78 | Ø75 | 864lm 4000K CRI90+ | 1 PCS |  |

Feature

Die-casting aluminium body, Fixed spot, Unique Pull handle design for easy installation. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable secondary optics is available in 5 different colors, Integrated narrow trim design, Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.











| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|--------------------------------------|--|---|--|--|---|
| 10W 250mA 36V DC 12W 300mA 36V DC |   |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED SPOTLIGHT

L06734



-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR<13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------|--------------|---|-----------------------|---------|---|
| L06734 -10 | 10W | 73xH75 | Ø65 | 720lm 4000K CRI90+ | 1 PCS |  |
| L06734 -12 | 12W | 86xH83 | Ø75 | 864lm 4000K CRI90+ | 1 PCS |  |

Feature

Die-casting aluminium body, 355°rotation 30°adjustable, Unique Pull handle design for easy installtion. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 diferent colors, Integrated narrow trim design, Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.











| | | | | | |
|--------------------------------------|--|--|--|--|---|
| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
| 10W 250mA 36V DC 12W 300mA 36V DC |   |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.






INTERIOR LED RECESSED SPOTLIGHT

L06735



-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR<13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free












UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------|--------------|---|-----------------------|---------|---|
| L06735 -10 | 10W | 98xH72 | Ø65 | 720lm 4000K CRI90+ | 1 PCS |   Ø65 |
| L06735 -12 | 12W | 108xH78 | Ø75 | 864lm 4000K CRI90+ | 1 PCS |   Ø75 |

Feature

Die-casting aluminium body, Fixed spot, trimless plaster-in. Unique Pull handle design for easy installation. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 different colors, Integrated trimless design,

Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.











| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|--------------------------------------|--|--|--|--|---|
| 10W 250mA 36V DC 12W 300mA 36V DC |   |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED SPOTLIGHT

L06736



-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR<13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------|--------------|---|-----------------------|---------|---|
| L06736 -10 | 10W | 98xH75 | Ø65 | 720lm 4000K CRI90+ | 1 PCS |  |
| L06736 -12 | 12W | 108xH83 | Ø75 | 864lm 4000K CRI90+ | 1 PCS |  |

Feature

Die-casting aluminium body, 355°rotation 30°adjustable,, trimless plaster-in. Unique Pull handle design for easy installtion. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 diferent colors, Integrated trimless design,


Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.









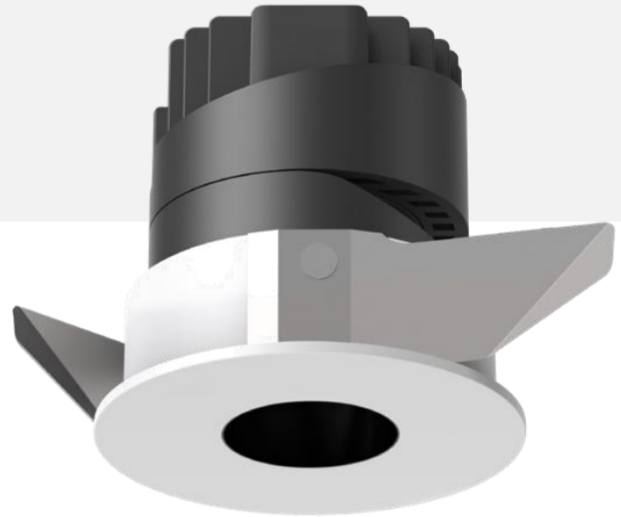

| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|--------------------------------------|--|---|--|--|---|
| 10W 250mA 36V DC 12W 300mA 36V DC |   |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED SPOTLIGHT

L06737
















-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR < 13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------|--------------|---|-----------------------|---------|---|
| L06737 -10 | 10W | 73xH73 | Ø65 | 650lm 4000K CRI90+ | 1 PCS |  |
| L06737 -12 | 12W | 86xH78 | Ø75 | 780lm 4000K CRI90+ | 1 PCS |  |

Feature

Recessed fixed metal flat pinhole Ø35mm, with round or oval aperture. inner body is directing spot. Two outgoing fluxes are available: 650 lm (10W), 780 lm (12W).











| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|--|-------------|--|---|---|
| 10W 250mA 36V DC |   | |  Matt white |  2700K |  10° |
| 12W 300mA 36V DC | | |  Matt black |  3000K |  15° |
| | | | |  4000K |  24° |
| | | | |  5000K |  36° |
| | | | | |  55° |

* Customization, It allows you to match the fixture with its surroundings.






INTERIOR LED RECESSED SPOTLIGHT

L06738
















-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR<13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------|--------------|---|-----------------------|---------|---|
| L06738 -10 | 10W | 98xH72 | Ø65 | 650lm 4000K CRI90+ | 1 PCS |   Ø65 |
| L06738 -12 | 12W | 108xH78 | Ø75 | 780lm 4000K CRI90+ | 1 PCS |   Ø75 |

Feature

Recessed trimless | plaster-in, fixed metal flat pinhole Ø35mm, with round or oval aperture. inner body is directing spot. Two outgoing fluxes are available: 650 lm (10W), 780 lm (12W).











| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|--|-------------|--|---|---|
| 10W 250mA 36V DC |   | |  Matt white |  2700K |  10° |
| 12W 300mA 36V DC | | |  Matt black |  3000K |  15° |
| | | | |  4000K |  24° |
| | | | |  5000K |  36° |
| | | | | |  55° |

* Customization, It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED SPOTLIGHT

L06739



-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR<13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free














UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc |
|------------|----------------------|-----------------|---|-----------------------|--|
| L06739 -12 | 12W | 133xH78 | Ø75  | 864lm 4000K CRI90+ | 1 PCS  |

Feature

Die-casting aluminium body, Fixed spot, trimless plaster-in. Unique Pull handle design for easy installation. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 different colors, Integrated trimless design,

Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.











| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|---|---|--|--|---|
| 12W 300mA 36V DC |  |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.





INTERIOR LED RECESSED SPOTLIGHT

L06740



-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR < 13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free
















UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc |
|------------|----------------------|-----------------|---|-----------------------|--|
| L06740 -12 | 12W | 133xH83 | Ø75  | 864lm 4000K CRI90+ | 1 PCS   Ø75 |

Feature

Die-casting aluminium body, 355°rotation 30°adjustable,, trimless plaster-in. Unique Pull handle design for easy installtion. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 diferent colors, Integrated trimless design,

Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.











| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|---|---|--|--|---|
| 12W 300mA 36V DC |  |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.





INTERIOR LED RECESSED SPOTLIGHT

L06741














-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR<13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc |
|------------|----------------------|-----------------|---|-----------------------|--|
| L06741 -12 | 12W | 133xH78 | Ø75  | 720lm 4000K CRI90+ | 1 PCS   Ø75 |

Feature


Recessed trimless | plaster in, adjustable metal flat pinhole Ø35mm, with round or oval aperture. The body is adjustable on installation kit. inner body is directing spot. Two outgoing fluxes are available: 500 lm (7W), 850 lm (10W).









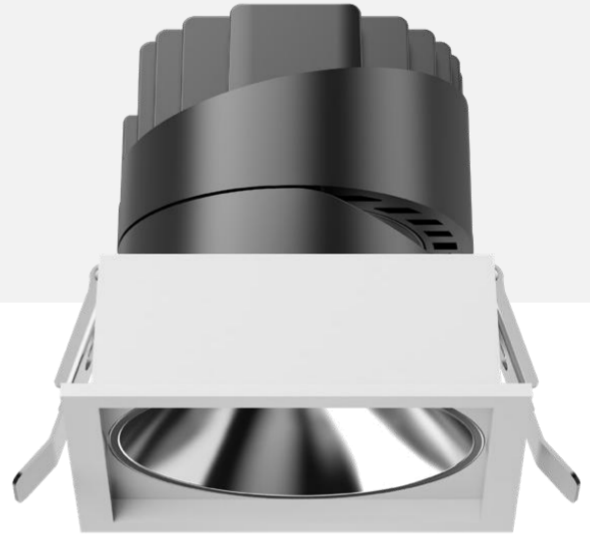

| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|--|-------------|--|--|---|
| 12W 300mA 36V DC |   | | <ul style="list-style-type: none">  Matt white  Matt black | <ul style="list-style-type: none">  2700K  3000K  4000K  5000K | <ul style="list-style-type: none">  10°  15°  24° |

* Customization, It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED SPOTLIGHT

L06742


















-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR < 13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc |
|------------|----------------------|-----------------|---|-----------------------|--|
| L06742 -12 | 12W | 85x85xH80 | 75x75  | 864lm 4000K CRI90+ | 1 PCS  |

Feature


Die-casting aluminium body, Fixed spot, Unique Pull handle design for easy installation. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable secondary optics is available in 5 different colors, Integrated narrow trim design, Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.







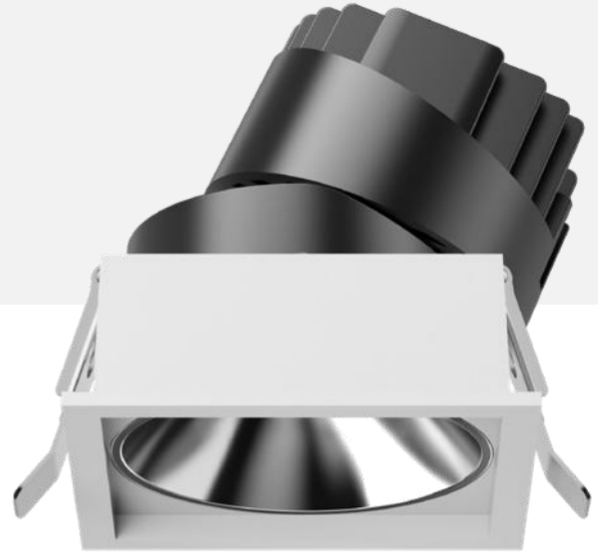



| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|---|---|--|--|---|
| 12W 300mA 36V DC |  |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.





INTERIOR LED RECESSED SPOTLIGHT

L06743

















-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR < 13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc |
|------------|----------------------|-----------------|---|-----------------------|--|
| L06743 -12 | 12W | 85x85xH80 | 75x75  | 864lm 4000K CRI90+ | 1 PCS   75x75 |

Feature


Die-casting aluminium body, 355°rotation 30°adjustable, Unique Pull handle design for easy installtion. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 diferent colors, Integrated narrow trim design, Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.









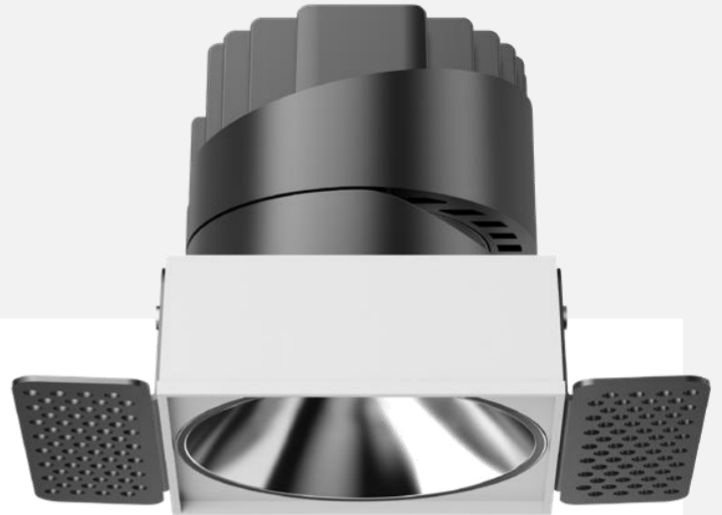

| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|---|--|--|--|---|
| 12W 300mA 36V DC |  |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.




INTERIOR LED RECESSED SPOTLIGHT


L06744



-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR < 13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT















| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc |
|------------|----------------------|-----------------|---|-----------------------|--|
| L06744 -12 | 12W | 130x85xH80 | 75x75  | 864lm 4000K CRI90+ | 1 PCS  75x75 |



Feature

Die-casting aluminium body, Fixed spot, trimless plaster-in. Unique Pull handle design for easy installation. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 different colors, Integrated trimless design, Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved.


Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.









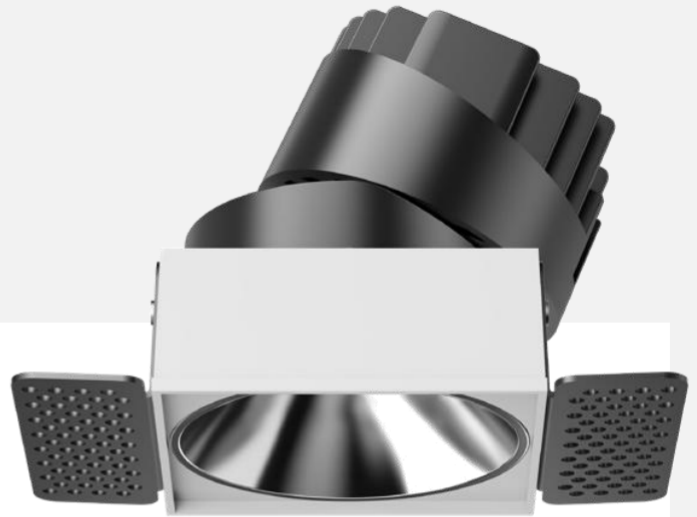

| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|---|--|--|--|---|
| 12W 300mA 36V DC |  |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.





INTERIOR LED RECESSED SPOTLIGHT

L06745



-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free










UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc |
|------------|----------------------|-----------------|---|-----------------------|--|
| L06745 -12 | 12W | 130x85xH80 | 75x75  | 864lm 4000K CRI90+ | 1 PCS   75x75 |

Feature

Die-casting aluminium body, 355°rotation 30°adjustable,, trimless plaster-in. Unique Pull handle design for easy installtion. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 diferent colors, Integrated trimless design,


Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.









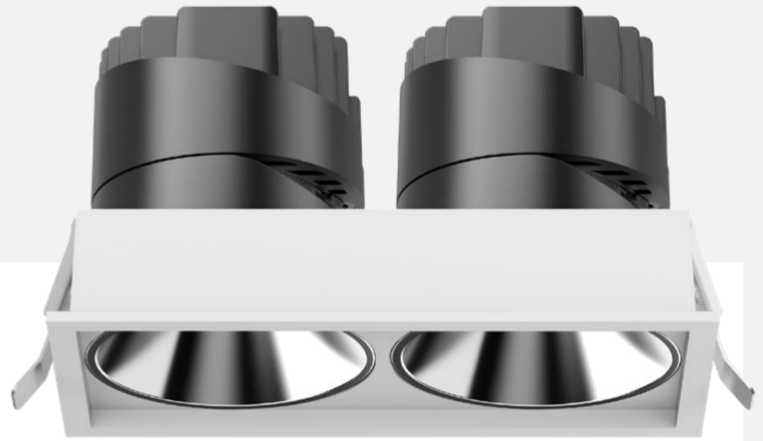

| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|---|--|--|--|---|
| 12W 300mA 36V DC |  |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.





INTERIOR LED RECESSED SPOTLIGHT

L06746















-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR<13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free

UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------------|-----------------|---|------------------------|------------|--|
| L06746 -12 | 24W | 160x85xH80 | 150x75  | 1728lm 4000K CRI90+ | 2 PCS |   150x75 |

Feature


Die-casting aluminium body, double spots, Unique Pull handle design for easy installation. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable secondary optics is available in 5 different colors, Integrated narrow trim design, Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved. Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.









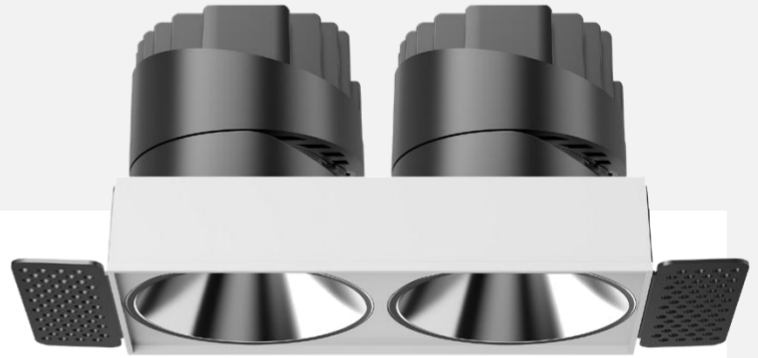

| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|---|---|--|--|---|
| 12W 300mA 36V DC |  |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.





INTERIOR LED RECESSED SPOTLIGHT

L06747



-  IP44
-  Europe Standard
-  Ceiling, wall recessed.
-  300-400mm cable with quick connector.
-  CE Certificate. 220-240V 50-60/Hz
-  Aluminium Die casting materials, powder coated.
-  UGR < 13 CRI97 3SDCM CREE branded COB LED
-  Warranty 5 Years
-  Triac | 0/1-10V | DALI Tunable White dimming
-  Remote LED Driver Flicker Free














UGR<13 | SOFT AND UNIFORM LIGHT SPOT

| Code | System Power W | Dimension mm | Cutout mm  | Output lm | LEDs pc | |
|------------|----------------------|-----------------|---|------------------------|------------|---|
| L06747 -12 | 24W | 205x85xH80 | 150x75  | 1728lm 4000K CRI90+ | 2 PCS |   |

Feature

Die-casting aluminium body, double spot, trimless plaster-in. Unique Pull handle design for easy installation. PMMA LENS, UGR<13, soft light, No secondary light spot, pure and clear, uniform light spot transition, more soft and comfortable. secondary optics is available in 5 different colors, Integrated trimless design, Same appearance both Fixed and Adjustable, The fixture is not visible from the low ceiling board, the effect of visible light and invisible fixture is achieved.

Ideal solution for accent lighting of the medium to high end projects, mainly suitable for Hotel, Villa, Apartment, Restaurant, etc.

| Remote LED Driver | LED Chips | Accessories | Finishing | LED color | Beam Angle |
|-------------------|---|---|--|--|---|
| 12W 300mA 36V DC |  |  Linear Spread  Hex Louver  Prismatic Spread  Softening Lens  White  Black  Gold  Silver  Mirror |  Matt white  Matt black |  2700K  3000K  4000K  5000K |  10°  15°  24°  36°  55° |

* Customization, It allows you to match the fixture with its surroundings.