

Not afraid of water/fog/oil/smokecan be used in the hotel, ballroom

Ultra-thin design









5MM




Four kind of product size:










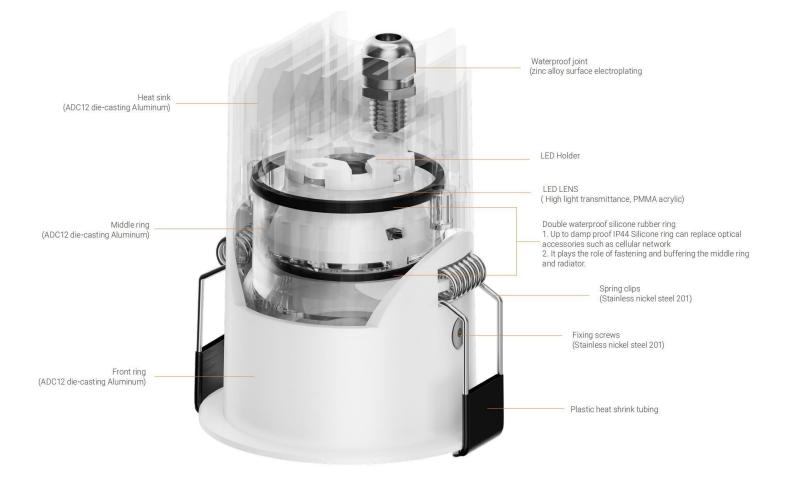

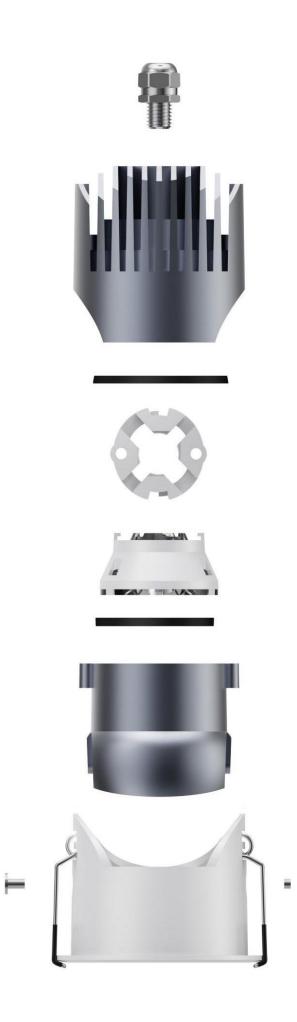



Stepless regulation 0~30° at any angle





Aluminium Integrated Frame



Aluminium Secondary Optic



Lens



Lens





Beauty, more than one

Multi-coloured face rings ,The reflector is multi-color and can meet the needs of different occasionsThe reflector is precisely designed,plated and nano spray painted Comfortablelight type with high reflection efficiency and high efficiency





Pearl Black



Black



Silver



White



Gold





No stray light, round spot

No secondary light spot, pure and clear Uniform light spot transition, more soft and comfortable

Light spot effect

10°	15°	24°	36°	55°	
				1000	

IP65

Class III

Ceiling, wall recessed.

Warranty 5 Years

Remote LED Driver

Flicker Free

 \Diamond

CE

UGR <13

Tunable White

FLICKER FREE



VISUAL COMFORT LOW GLARE OPTIC WITH RECESSED LIGHT SOURCE.

Code	System ^{Power} W	Dimension ^{mm}	Cutout mm	Output Im	LEDs pc	
L03725 -6	6W	52xH72	Ø45	510lm 4000K CRI90+	1 PCS	+/·25°
L03725 -8	8W	62xH77	Ø55	680lm 4000K CRI90+	1 PCS	+/~25°
L03725 -10	10W	73xH80	Ø65	850lm 4000K CRI90+	1 PCS	+/·25°
L03725 -12	12W	84xH85	Ø75	1020lm 4000K CRI90+	1 PCS	+ [/] ·25°

Feature

Aluminium material and powder coating. Remote LED driver version. High level of visual comfort. CRI97+ The fixing spot lights offer multiple optic distributions. Easy installations Visual comfort low glare optic with recessed light source. High Definition optical lenses in thermoplastic material. Specialised optics and optical filters can be ordered. uniform distribution. Syears warranty. Flicker-Free. Dimmable. Easy lighting demand, for a wide scala of projects, from residential to hotels, restaurants, retail and much more. Customized color finishing, power changes are possible depending on the request and the quantity. It is presented to its customers as a clean and non-dazzling

Remote LED Driver LED Chips		LED Chips	Accessories	Finishing	LED color	Beam Angle	
6W 8W 10W 12W	150mA 36V DC 200mA 36V DC 250mA 36V DC 300mA 36V DC	CREE ÷ CITIZEN bridgelux	Linear Spread Hex Louver	Prismatic Spread Softening Lens	Matt white Matt black Customization	2700K 3000K 4000K 5000K 6500K	 15° 24° 36° 55°