7W 200mA 490lm

Double adjustability tube pull-out spotlight , uniform distribution . Visual comfort low glare optic , recessed light source. available for five different output beams 15/24/36/50°. Specialized optical filters can be ordered. The decorative secondary optic available in multiple color finishing, **B**lack I White I Chromed I **G**old. The basic model comes in white RAL9003 or black RAL9005 colors. Customized color finishing, power changes are possible depending on the request and the quantity.
Simple and flexible installation trimless or with spring.

12W 300mA 840lm

A small downlight characterized by innovative and surprising solutions.The possibility to take it out from its frame , the rotation and the right angled inclination make this product to be highly flexible and easy to handle.It is ideal for lighting architectural and artistic details up. The body of trimmed style can either be completely hidden into the ceiling or fully visible to aim it wherever you want. Realize superior lighting space with a deep cut-off angle.

25W 600mA 1750lm

- Europe Standard CE Certificate.
- IP44
- ECO Energy Saving
- bridgelux
- Class III
- Tridonic ON/OFF I OSRAM Dali Dimmable
- Eyes friendly
- Ceiling, wall recessed.
- 220-240V 50-60/Hz
- Ceiling thickness 3-20mm
- Easy for Installation
- CRI97 36V DC
- Warranty 5 Years
- Flicker Free , Remote LED Driver
- 30-40cm cable with quick connector.
- 90° adjustable and 355°rotation
- Triac I 0/1-10V I DALI dimmable
- Tunable White dimming **Bridgelux branded COB LED** CCT 2700K-6500K

L04201

7W	Ø58	001
12W	Ø77	001
25W	Ø97	001

L04208

7W	Ø55	001
12W	Ø75	002
25W	Ø95	002

L04202

14W	129x68	002
24W	180x91	002
40W	225x111	003

L04203

7W	58x58	003
12W	77x77	003
20W	97x97	003

L04204

14W	120x62	004
24W	167x80	004
50W	209x97	004

L04206

21W	165x58	004
36W	225x77	005
75W	287x97	005

L04207

28W	111x111	005
48W	153x153	005
80W	192x192	006

L04209

14W	126x65	006
24W	178x88	006
40W	223x109	006

L04210

7W	55x55	007
12W	75x75	007
20W	95x95	007

L04211

14W	120x60	007
24W	164x77	008
50W	207x95	008

L04212

14W	109x55	008
24W	150x75	008
50W	190x95	009

L04213

21W	163x55	009
36W	222x75	009
75W	284x95	009

L04214

28W	109x109	010
48W	150x150	010
80W	190x190	010
100W	190x190	010

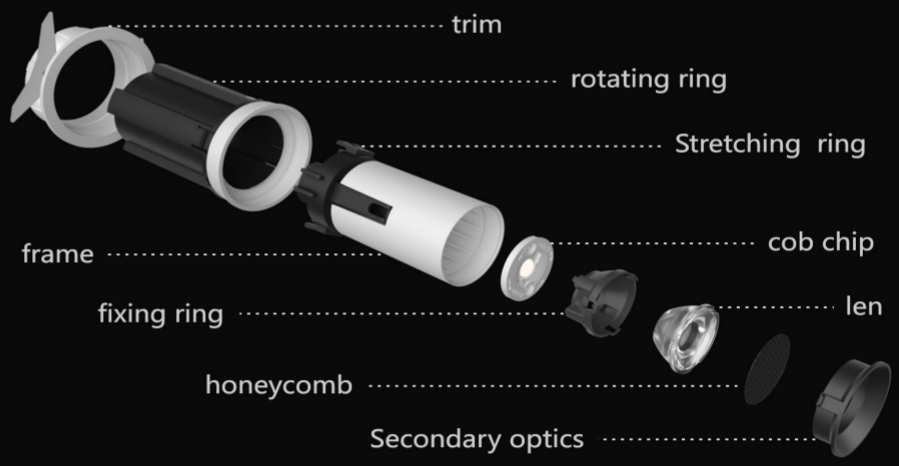
trim
rotating ring
Stretching ring
frame
cob chip
fixing ring
len
honeycomb
Secondary optics

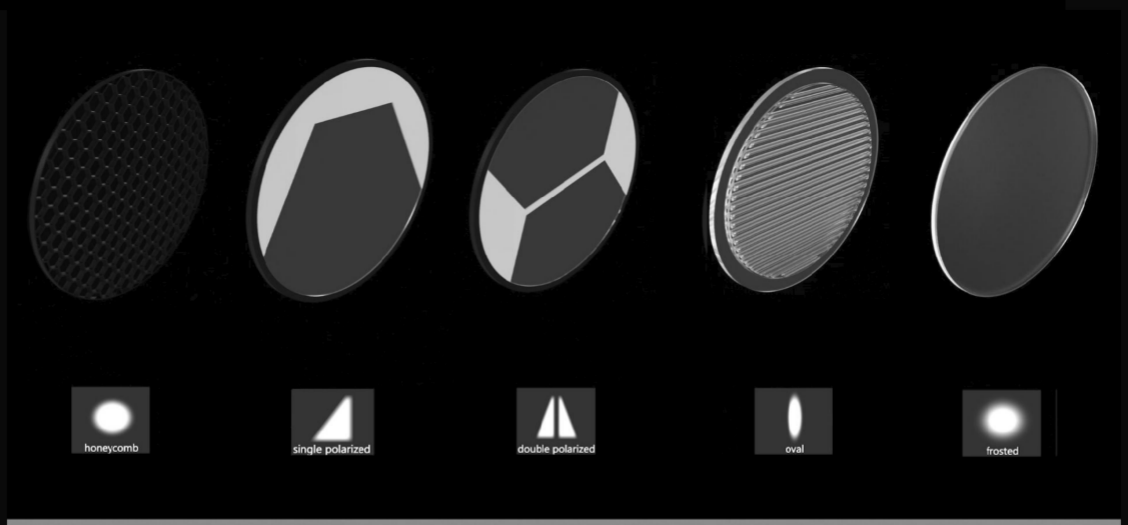
honeycomb
single polarized
double polarized
oval
frosted

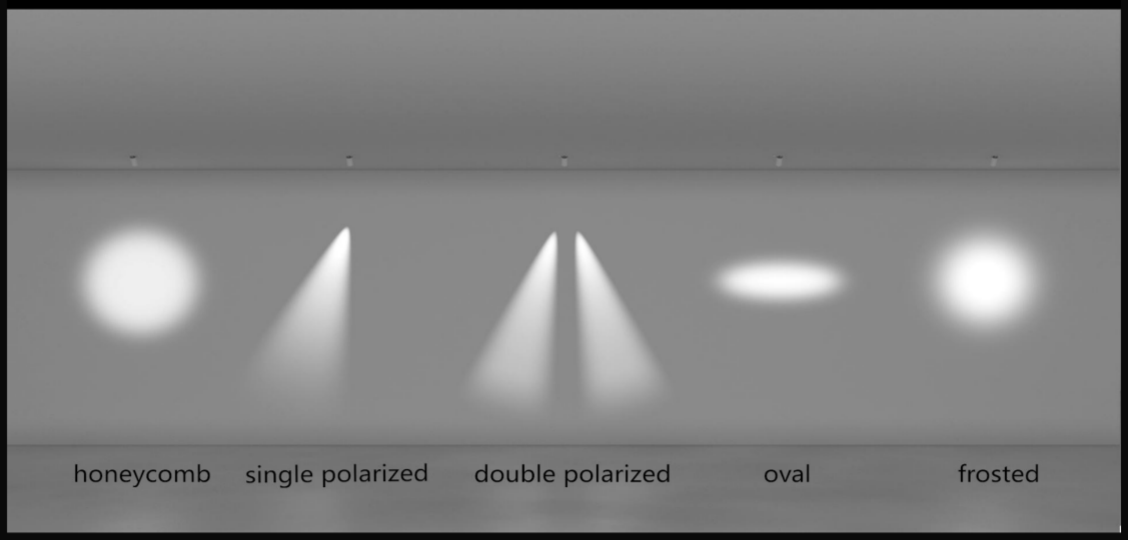
honeycomb
single polarized
double polarized
oval
frosted

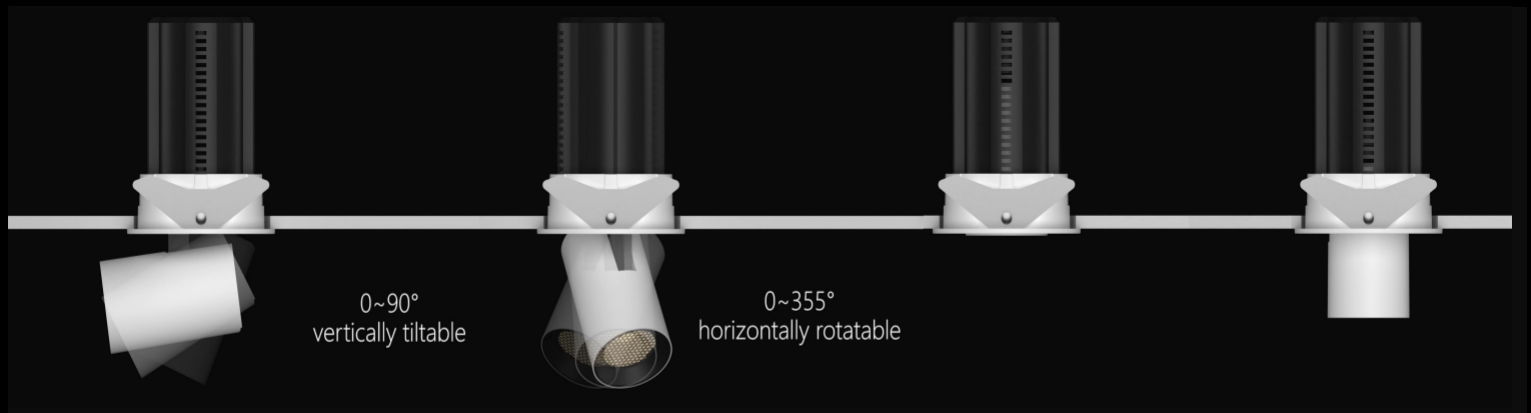



modular design multiple light.
tool-free to change the LED module

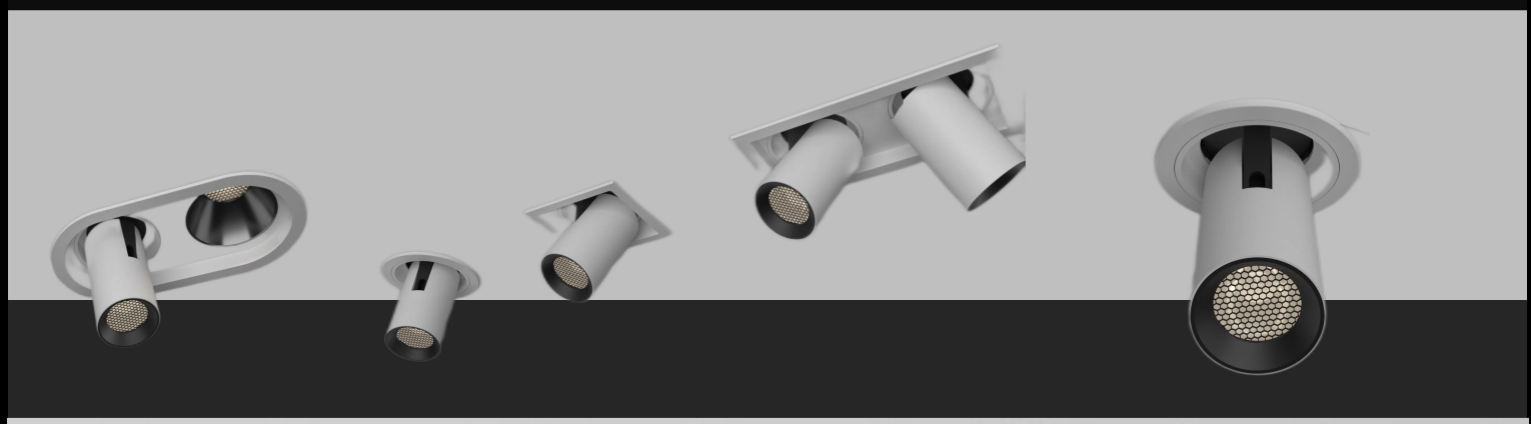

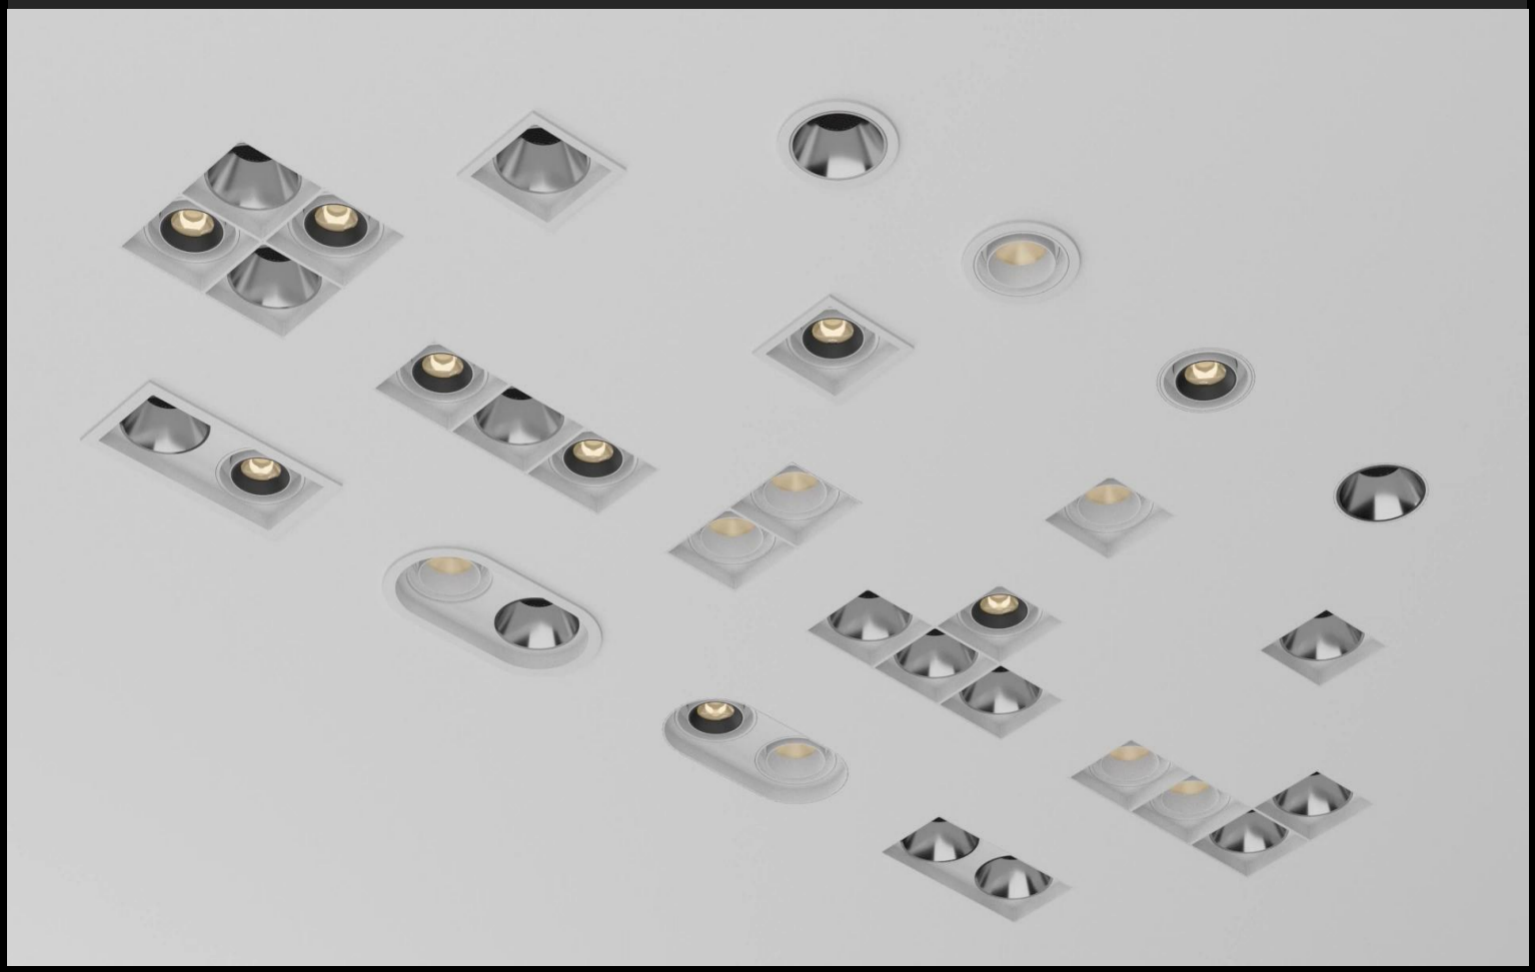

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04201 - 7



58mm

power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	58xH86	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04201 - 12



77mm

power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	77xH104	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04201 - 25



97mm

power	driver	lumen	size(mm)	LEDs	beam angle
25W	625mA	2125lm 4000K	97xH127	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04208 - 7



55mm

power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	62xH86	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread, Hex Louver, Prismatic Spread, Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04208 -12



75mm

power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	84xH104	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04208 -25



95mm

power	driver	lumen	size(mm)	LEDs	beam angle
25W	625mA	2125lm 4000K	110xH127	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04202 -14



129x68

power	driver	lumen	size(mm)	LEDs	beam angle
14W	175mA	1190lm 4000K	129x68xH91	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04202 -24



180x91

power	driver	lumen	size(mm)	LEDs	beam angle
24W	300mA	2040lm 4000K	180x91xH116	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread, Hex Louver, Prismatic Spread, Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04202 - 40



225x111

power	driver	lumen	size(mm)	LEDs	beam angle
40W	500mA	3400lm 4000K	225x111xH142	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE 220-240V 50/60Hz 3-20mm CRI >97

L04203 - 7



58x58

power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	58x58xH94	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE 220-240V 50/60Hz 3-20mm CRI >97

L04203 - 12



77x77

power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	77x77xH116	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE 220-240V 50/60Hz 3-20mm CRI >97

L04203 - 20



97x97

power	driver	lumen	size(mm)	LEDs	beam angle
20W	500mA	1700lm 4000K	97x97xH144	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE 220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread, Hex Louver, Prismatic Spread, Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04204 -14



120x62

power	driver	lumen	size(mm)	LEDs	beam angle
14W	175mA	1190lm 4000K	120x62xH91	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04204 -24



167x80

power	driver	lumen	size(mm)	LEDs	beam angle
24W	300mA	2040lm 4000K	167x80xH116	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04204 -50



209x97

power	driver	lumen	size(mm)	LEDs	beam angle
50W	625mA	4250lm 4000K	209x97xH142	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04206 -21



165x58

power	driver	lumen	size(mm)	LEDs	beam angle
21W	175mA	1785lm 4000K	165x58xH94	3	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread, Hex Louver, Prismatic Spread, Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04206 - 36



225x77

power	driver	lumen	size(mm)	LEDs	beam angle
36W	300mA	3060lm 4000K	225x77xH116	3	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04206 - 75



287x97

power	driver	lumen	size(mm)	LEDs	beam angle
75W	625mA	6375lm 4000K	287x97xH144	3	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04207 - 28



111x111

power	driver	lumen	size(mm)	LEDs	beam angle
28W	175mA	2380lm 4000K	111x111xH94	4	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04207 - 48



153x153

power	driver	lumen	size(mm)	LEDs	beam angle
48W	300mA	4080lm 4000K	153x153xH116	4	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread, Hex Louver, Prismatic Spread, Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04207 -80



192x192

power	driver	lumen	size(mm)	LEDs	beam angle
80W	500mA	6800lm 4000K	192x192xH144	4	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04209 -14



126x65

power	driver	lumen	size(mm)	LEDs	beam angle
14W	175mA	1190lm 4000K	140x79xH91	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04209 -24



178x88

power	driver	lumen	size(mm)	LEDs	beam angle
24W	300mA	2040lm 4000K	194x105xH116	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04209 -40



223x109

power	driver	lumen	size(mm)	LEDs	beam angle
40W	500mA	3400lm 4000K	239x125xH140	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread, Hex Louver, Prismatic Spread, Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04210 - 7



55x55

power	driver	lumen	size(mm)	LEDs	beam angle
7W	175mA	595lm 4000K	65x65xH94	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04210 - 12



75x75

power	driver	lumen	size(mm)	LEDs	beam angle
12W	300mA	1020lm 4000K	85x85xH116	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04210 - 20



95x95

power	driver	lumen	size(mm)	LEDs	beam angle
20W	500mA	1700lm 4000K	105x105xH140	1	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04211 - 14



120x60

power	driver	lumen	size(mm)	LEDs	beam angle
14W	175mA	1190lm 4000K	130x69xH91	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04211 -24



164x77

power	driver	lumen	size(mm)	LEDs	beam angle
24W	300mA	2040lm 4000K	180x90.5xH116	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04211 -50



207x95

power	driver	lumen	size(mm)	LEDs	beam angle
50W	625mA	4250lm 4000K	223.5x109.5xH142		15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04212 -14



109x55

power	driver	lumen	size(mm)	LEDs	beam angle
14W	175mA	1190lm 4000K	118x65xH94	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04212 -24



150x75

power	driver	lumen	size(mm)	LEDs	beam angle
24W	300mA	2040lm 4000K	158x85xH116	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread, Hex Louver, Prismatic Spread, Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04212 - 50



190x95

power	driver	lumen	size(mm)	LEDs	beam angle
50W	625mA	4250lm 4000K	198x104.5xH144	2	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04213 - 21



163x55

power	driver	lumen	size(mm)	LEDs	beam angle
21W	175mA	1785lm 4000K	171x64xH94	3	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04213 - 36



222x75

power	driver	lumen	size(mm)	LEDs	beam angle
36W	300mA	3060lm 4000K	232x85xH116	3	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04213 - 75



284x95

power	driver	lumen	size(mm)	LEDs	beam angle
75W	625mA	6375lm 4000K	294x105xH144	3	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread Hex Louver Prismatic Spread Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.

INTERIOR LED RECESSED DOWN SPOTLIGHT - PULLOUT

L04214 -28



109x109

power	driver	lumen	size(mm)	LEDs	beam angle
28W	175mA	2380lm 4000K	118x118xH94	4	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04214 -48



150x150

power	driver	lumen	size(mm)	LEDs	beam angle
48W	300mA	4080lm 4000K	158x158xH116	4	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04214 -80



190x190

power	driver	lumen	size(mm)	LEDs	beam angle
80W	500mA	6800lm 4000K	198x198xH144	4	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

L04214 -100



190x190

power	driver	lumen	size(mm)	LEDs	beam angle
100W	625mA	8500lm 4000K	198x198xH144	4	15° 26° 36° 50°

IP44 DALI FLICKER FREE

220-240V 50/60Hz 3-20mm CRI >97

Remote LED Driver	LED	Accessories	Finishing	LED color	CRI
Triac dimming 0/1-10V dimming DALI dimming TW dimming	bridgelux	Linear Spread, Hex Louver, Prismatic Spread, Softening Lens	Matt white Matt black Customized	2700K 3000K 4000K 5000K	CRI90+

*It allows you to match the fixture with its surroundings.