



Linan 里南升级系列

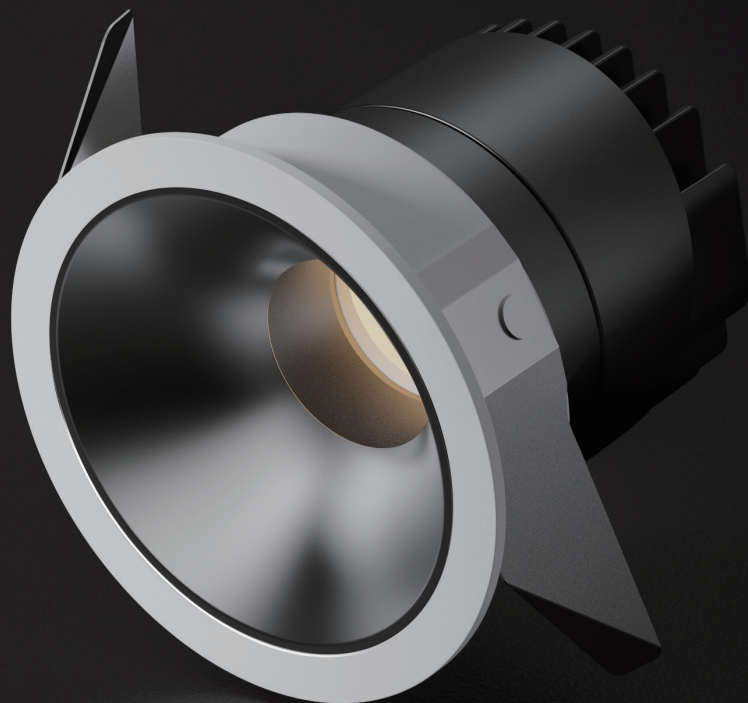



IP54


Linan upgrade

里南升级系列

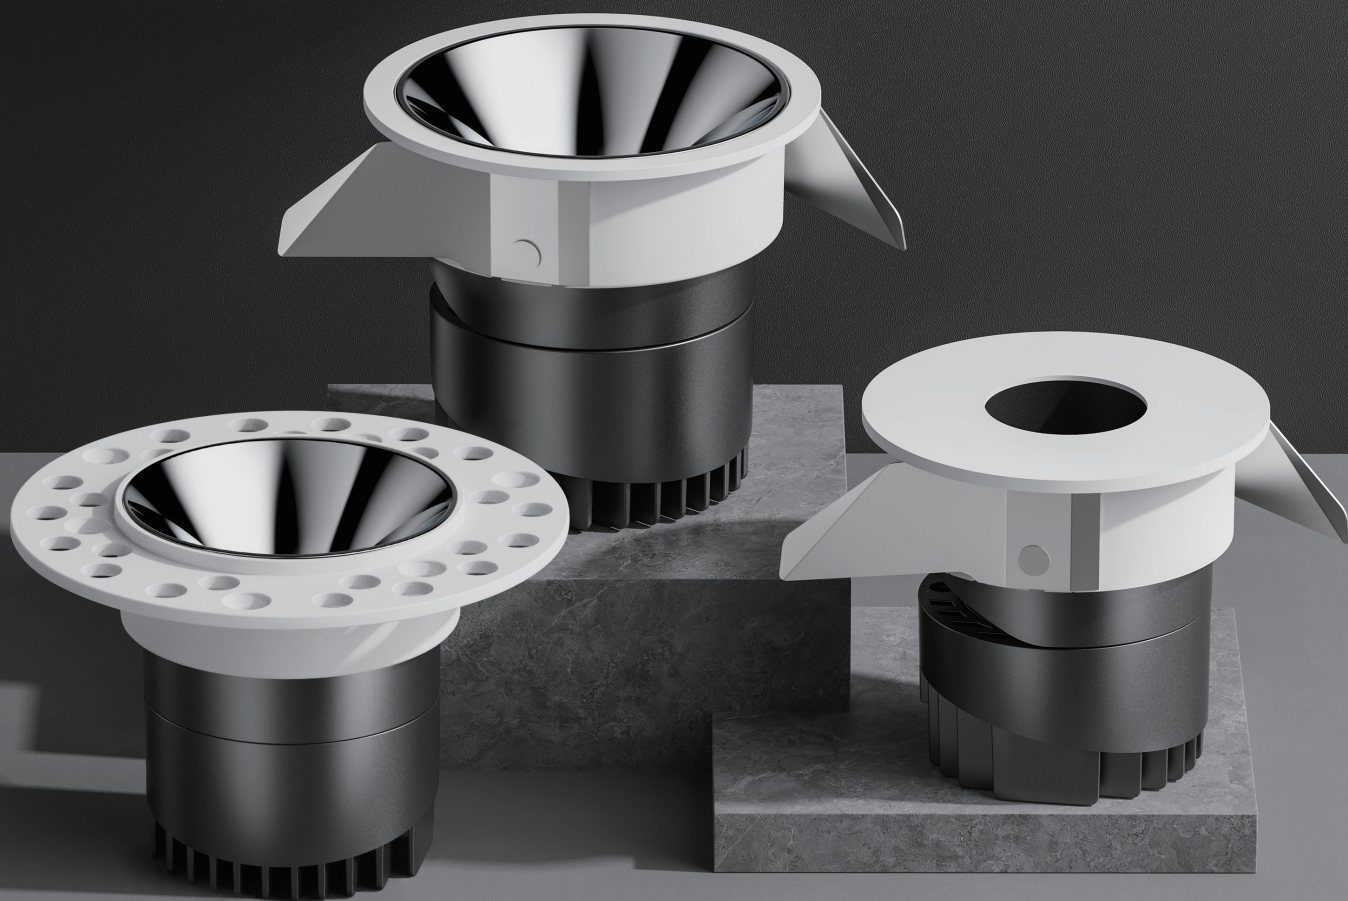

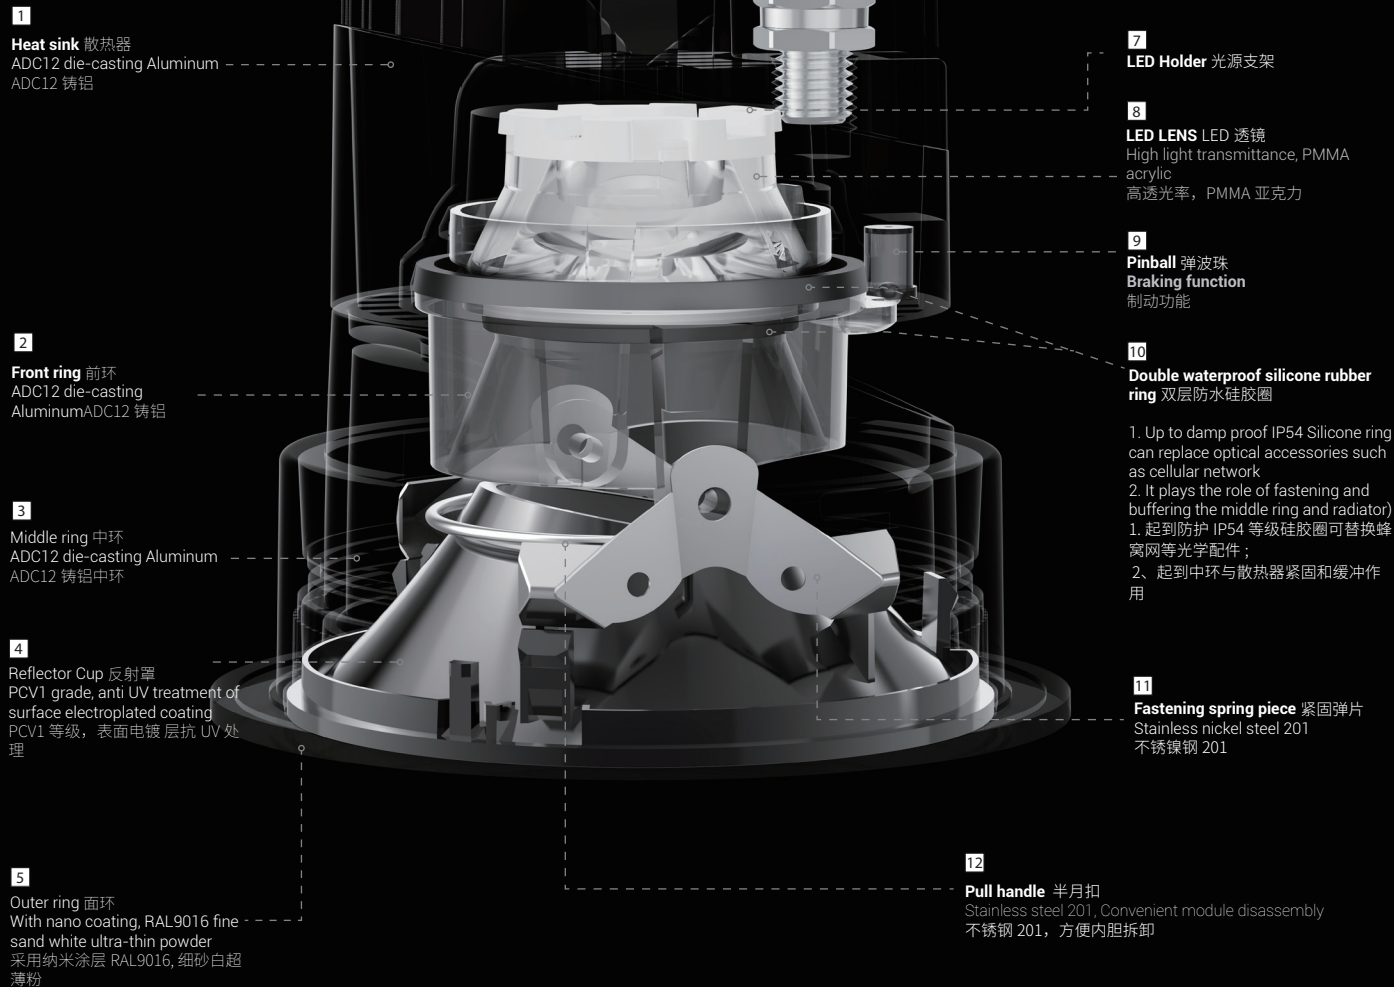

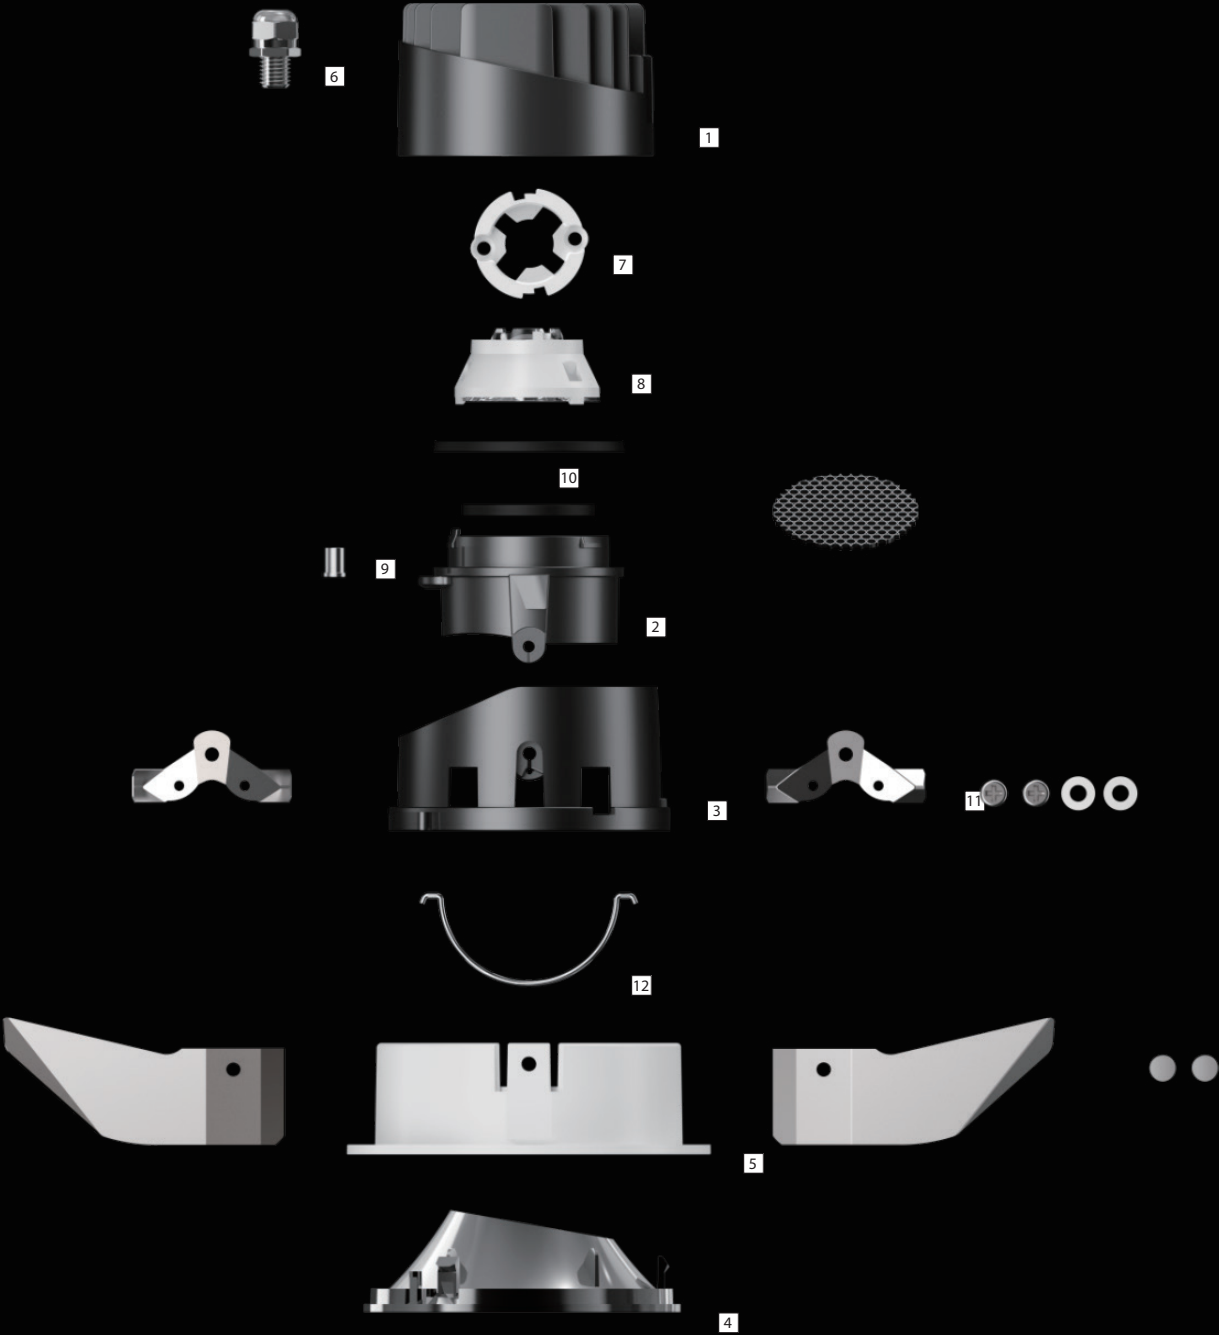

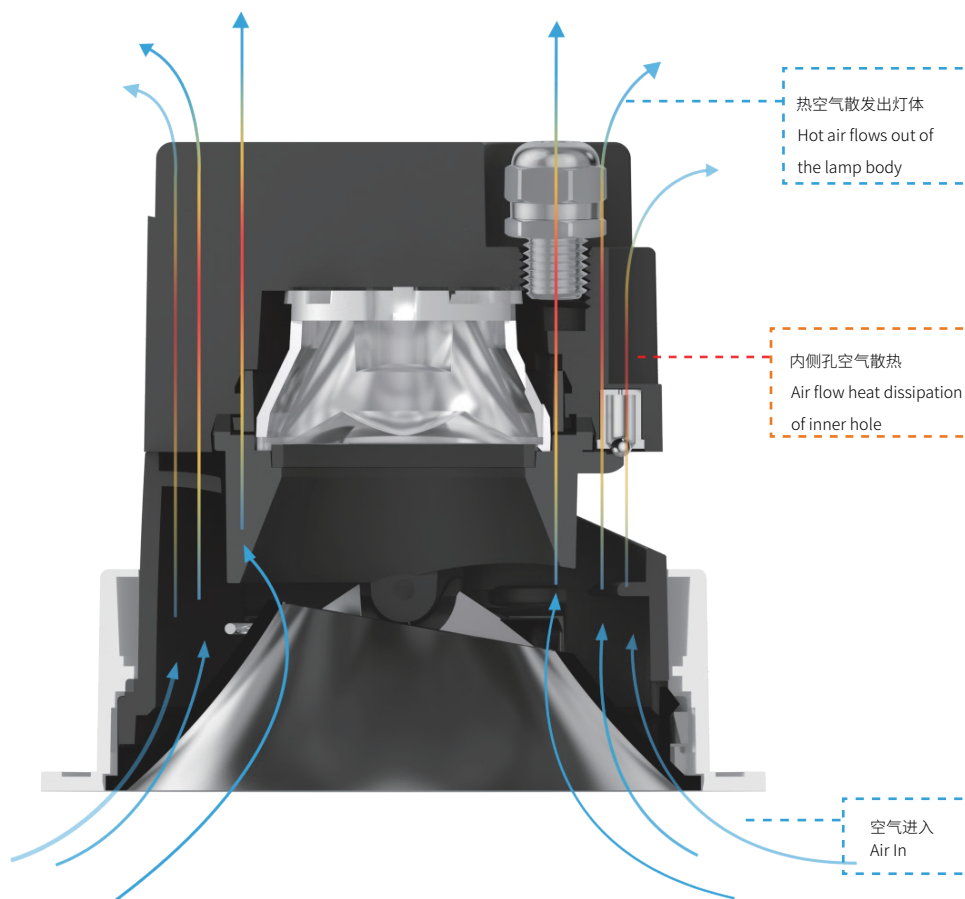


Radiator simulation

散热器能效模拟

Die-casting aluminum heat dissipation structure, the heat is derived from the inner hole of the heatsink, and when the air flow rises from the inner hole, the heat is exported with the air.

压铸铝高效散热结构，空气进入灯体散热器内侧孔，升起时，同时把热量随空气导出

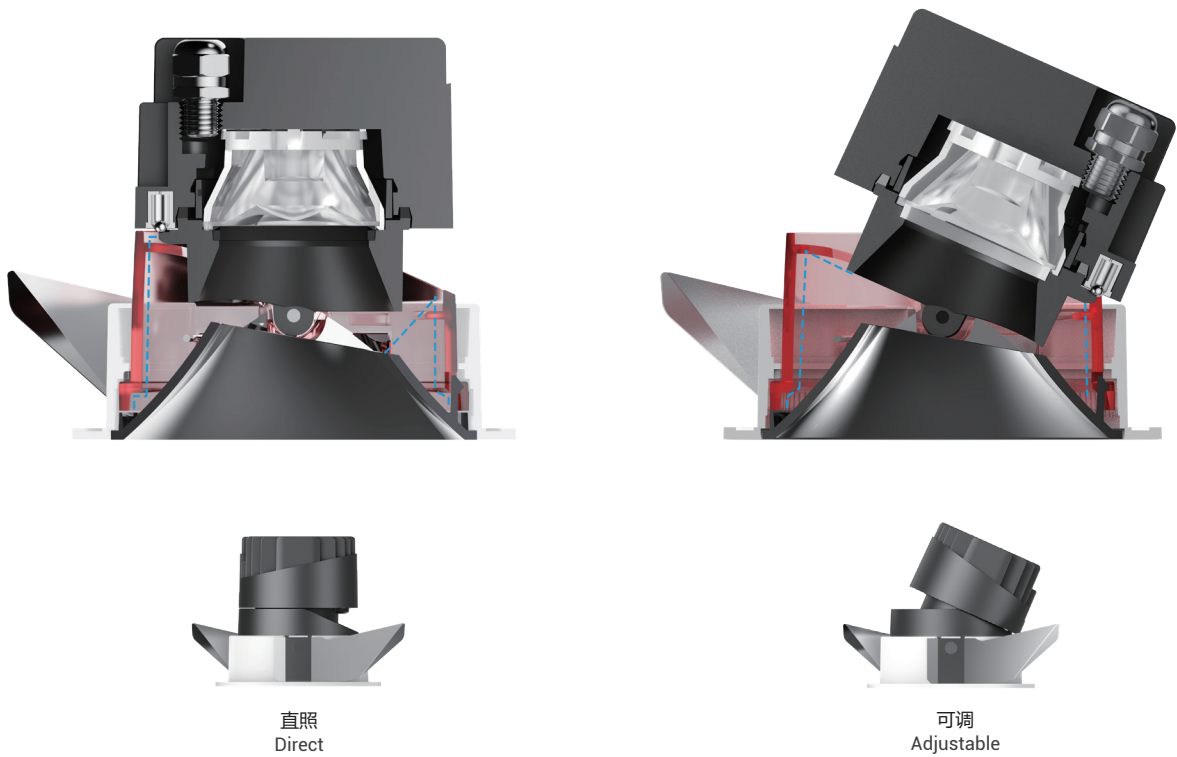

Note: The red part is the adjustment middle ring, and light leakage prevention design show in the schematic diagram

注：红色部分为调节中环，防漏光设计示意图

Light leakage prevention design

无漏光设计

Through the full surrounding middle ring design, The direct lighting or adjustable light of the lamp is completely leakage prevention design, and effectively block the dazzling stray light and residual light


通过全包围中环设计，灯具直照或摆角出光无死角防漏光，有效阻隔刺眼杂光余光

Fool-proof design

防呆设计


Snap the reflector cover into the marked hole, Effectively fool-proof

将面罩对准标识的孔位卡进，有效起到防呆作用

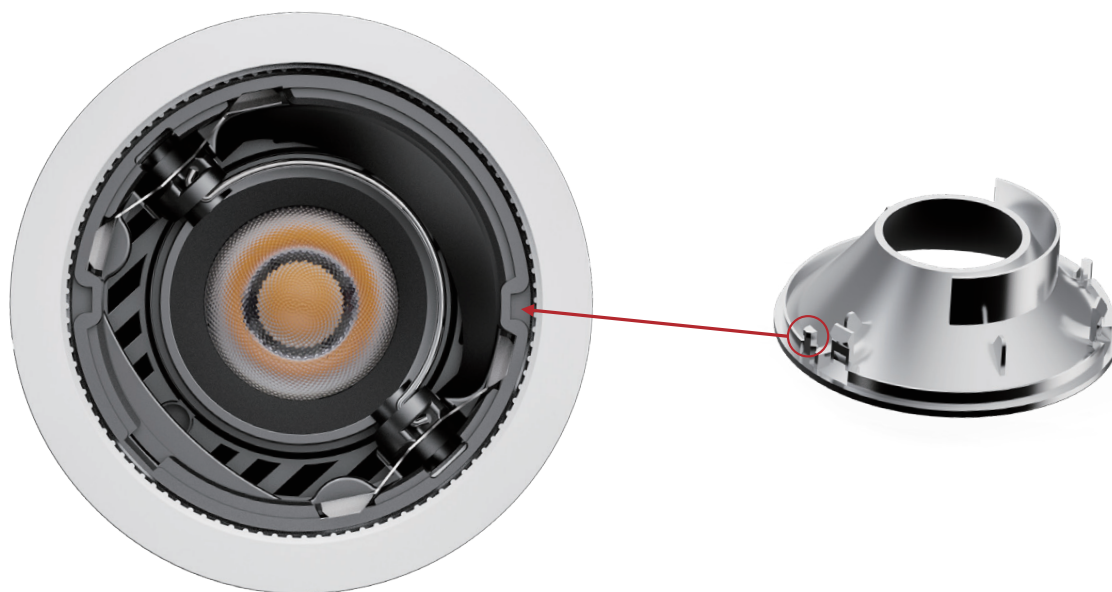

无极调节 0~30°任意角度


Stepless regulation 0~30°at any angle

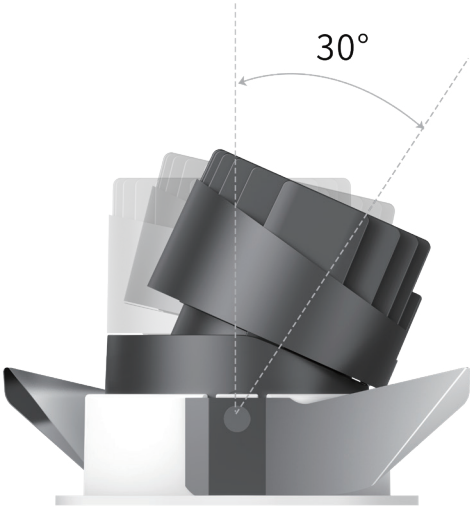


定位凹槽 355°水平旋转

Horizontal rotation of 355°, with positioning point, damping to Fool-proof and prevent winding.

水平旋转 355°，内有定位点、
尼阻恰到好处起到防呆作用，防止绕线。

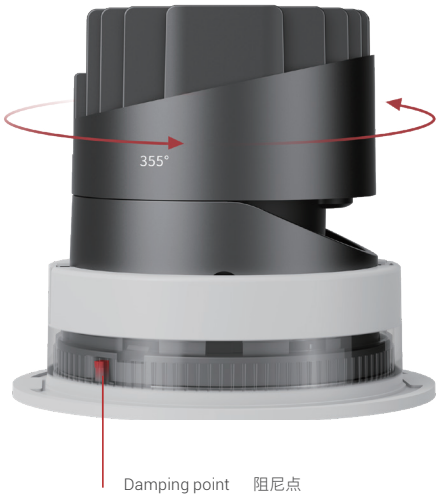

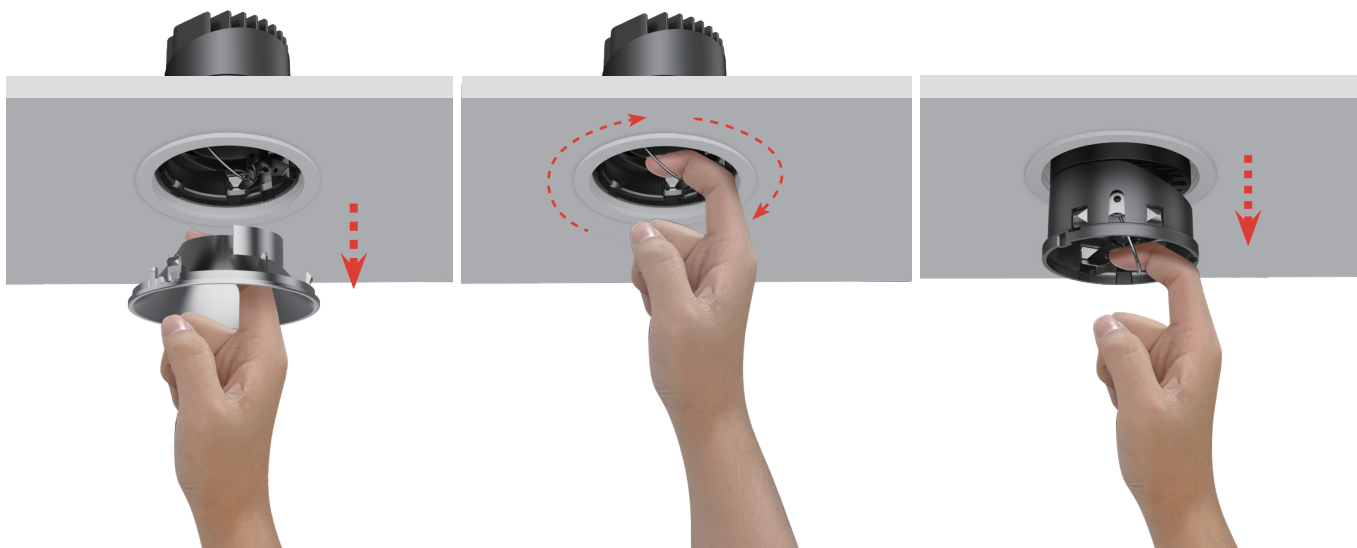

1

取下反射罩

Take out reflector cover

2

可旋转调节

Rotatable adjustment

3


向下拉动取出内胆

Pull out the module

Unique Pull handle design 独特半月扣设计

Pull ring design, convenient for tank adjustment and disassembly

手动拉环设计，方便内胆调节与拆卸

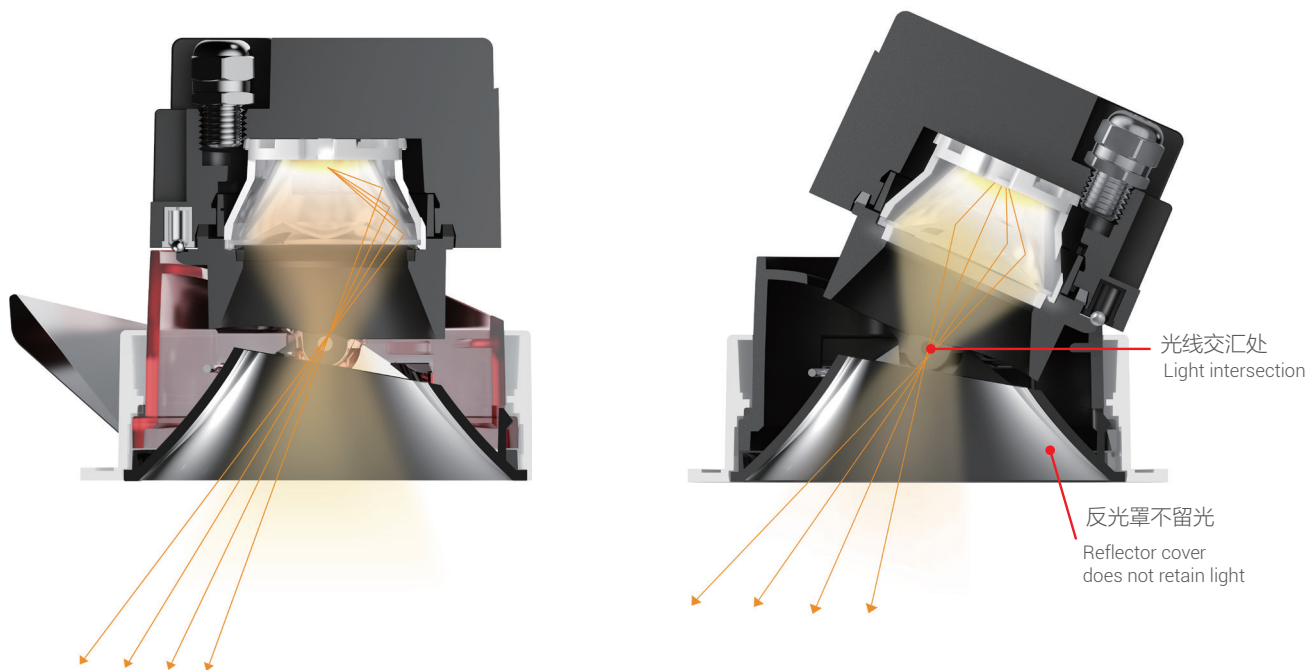

PMMA high luminous rate, Ribbed structure lens

PMMA 高出光率 棱纹结构透镜

The ribbed structure design is adopted, with its own anti glare effect, so that the light is interwoven at the center of the upper end of the reflector, effectively reducing stray light, and the light spot transition is even, more soft and comfortable

采用棱纹结构设计，自带防眩效果，让光线交织在反射光罩上端的中心点处，有效减少杂光，光斑过渡均匀，更柔和舒适。






Optical Fitting On demand transformation

光学配件 按需变换

五款光学配件可选，可实现光斑形状，整灯 UGR 等技术参数的变化，满足不同场景的照明需求。

Five optical Fitting are optional, which can realize the change of spot shape, full lamp UGR and other technical parameters to meet the lighting needs of different scenes

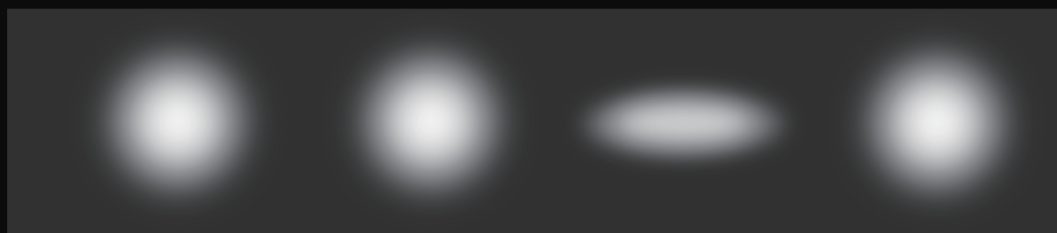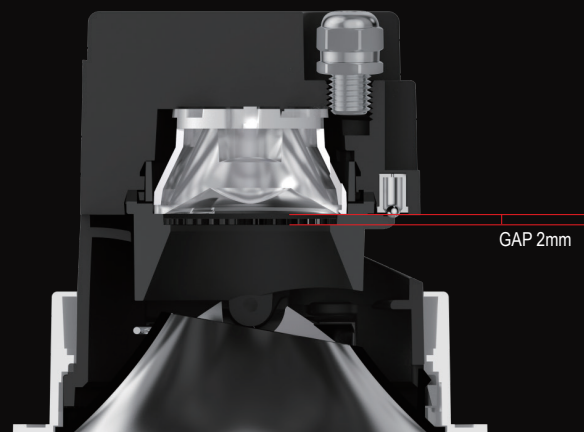

BVT optical film
光学膜



Clear glass sheet
清光玻璃片



Stretching optical PC
拉伸光学片




Honeycomb
防眩蜂窝网

No stray light,
Round spot



无杂散光 圆润光斑

无副光斑，纯净清晰，光斑过渡均匀，更柔和舒适。

Secondary light spot, pure and clear,
uniform light spot transition, more soft and comfortable



透镜光斑效果 Light spot effect

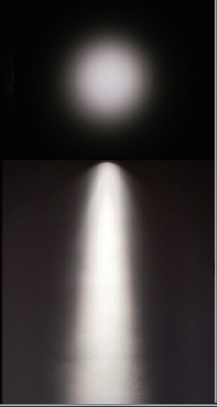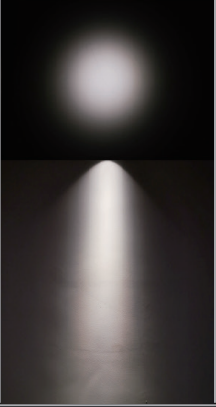8°	12°	15°	24°	36°	55°
					



NEW



Colour:



Optional :



型号 /Model Code	L05167	L05168	L05169
功率 /Power	9W	9W	9W
开孔 /Cut out	Φ55mm	Φ55mm	Φ55mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ63x76mm	Φ63x78mm	Φ63x76mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/55°	15°/24°/36°/55°	15°/24°/36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20



NEW



Colour:




Optional :

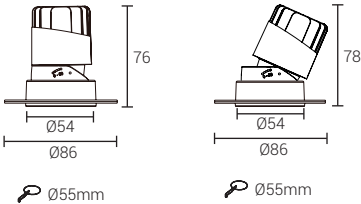

型号 /Model Code	L05170	L05171	L05172
功率 /Power	9W	9W	9W
开孔 /Cut out	Φ55mm	Φ55mm	Φ55mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ86xH76mm	Φ86xH78mm	Φ86xH76mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/55°	15°/24°/36°/55°	15°/24°/36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20


NEW

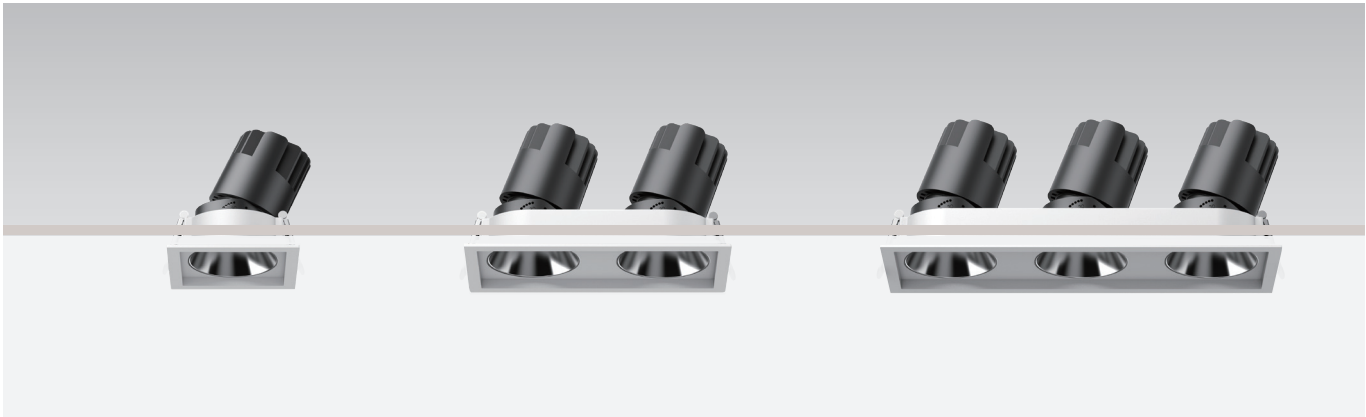

Colour:




Optional :

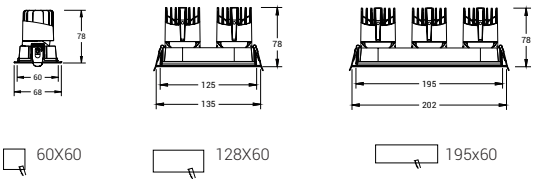

型号 /Model Code	L05173	L05174	L05175
功率 /Power	9W	2X9W	3X9W
开孔 /Cut out	60X60mm	128X60mm	195X60mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	68X68X78mm	135X68X78mm	202X68X78mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/55°	15°/24°/36°/55°	15°/24°/36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20



NEW

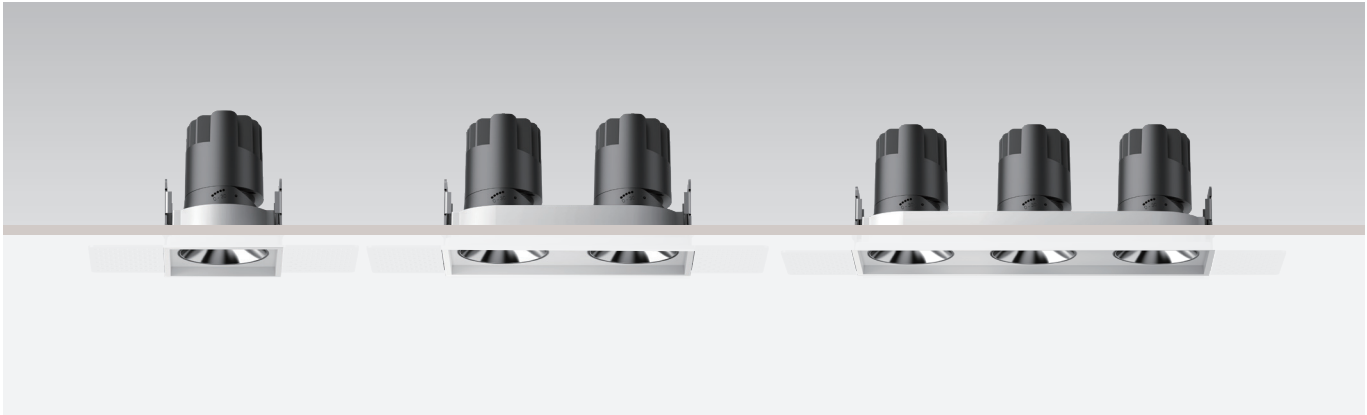

Colour:




Optional :

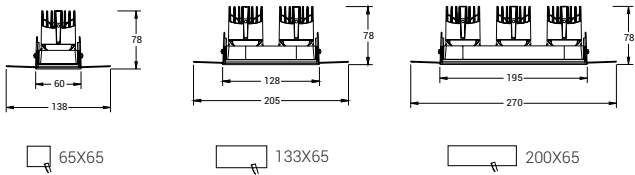

型号 /Model Code	L05176	L05177	L05178
功率 /Power	9W	2X9W	3X9W
开孔 /Cut out	65X65mm	133X65mm	200X65mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	138X60X78mm	205X60X78mm	272X60X78mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/55°	15°/24°/36°/55°	15°/24°/36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20

NEW

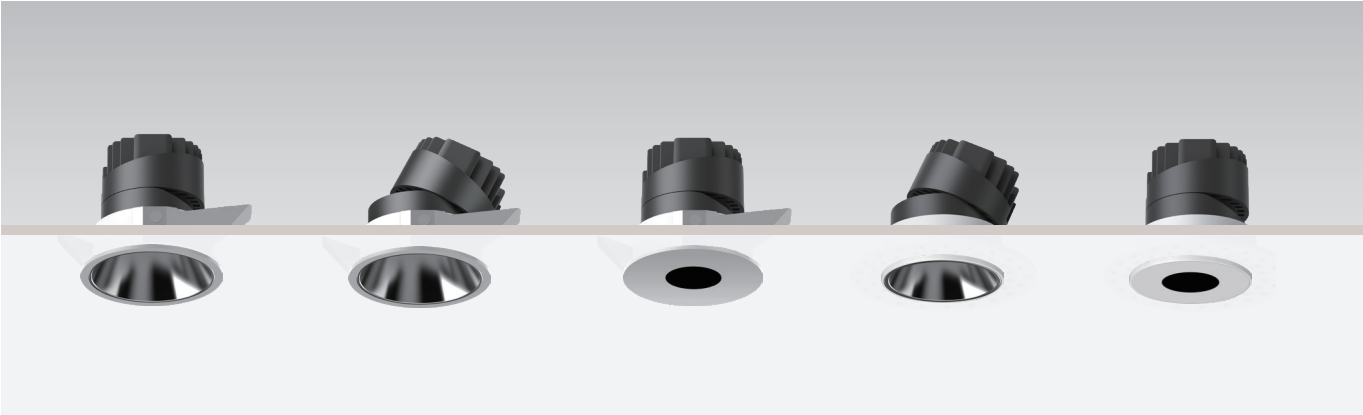

Colour:




Sand gold Pearl Black Black White Silver Chrome

Optional :



Honey comb Stripe

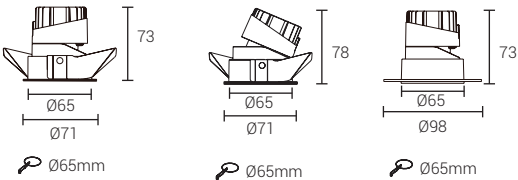

型号 /Model Code	L05179	L05180	L05181	L05182	L05183
功率 /Power	10W	10W	10W	10W	10W
开孔 /Cut out	Φ65mm	Φ65mm	Φ65mm	Φ65mm	Φ65mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ71x73mm	Φ71x78mm	Φ72.5x73mm	Φ98x78mm	Φ98x73mm

眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 55°	10°/15°/ 24°/ 36°/ 55°	10°/15°/ 24°/ 36°/ 55°*	10°/15°/ 24°/ 36°/ 55°	10°/15°/ 24°/ 36°/ 55°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP54	IP54	IP54	IP54	IP54



NEW



Colour:



Optional :



型号 /Model Code	L05184	L05185	L05186
功率 /Power	12W	12W	12W
开孔 /Cut out	Φ75mm	Φ75mm	Φ75mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ81.5x78mm	Φ81.5x83mm	Φ86x78mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP54	IP54	IP54


NEW



Colour:



Optional :



型号 /Model Code	L05187	L05188	L05189
功率 /Power	12W	12W	12W
开孔 /Cut out	Φ75mm	Φ75mm	Φ75mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ108X78mm	Φ108X78mm	Φ108X78mm

眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP54	IP54	IP54



NEW



Colour:



Optional :



型号 /Model Code	L05190	L05191	L05192
功率 /Power	12W	12W	12W
开孔 /Cut out	Φ75mm	Φ75mm	Φ75mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	133X78mm	133X78mm	133X78mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP54	IP54	IP54



NEW




Colour:



Optional :



□ 75x75mm



□ 155x75mm

型号 /Model Code	L05193	L05194
功率 /Power	12W	2X12W
开孔 /Cut out	75x75mm	155X75mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	85x85X80mm	160X85X80mm
眩光值 /UGR	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h
防护等级 /IP	IP54	IP54



NEW



Colour:



Optional :

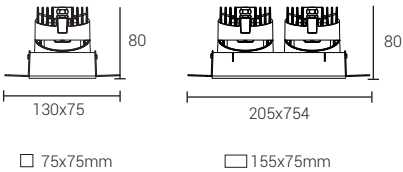


型号 /Model Code	L05195	L05196
功率 /Power	12W	2X12W
开孔 /Cut out	75x75mm	155X75mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	130x75x80mm	205X75X80mm
眩光值 /UGR	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h
防护等级 /IP	IP54	IP54



CREE 

- Reflector cover 6 colors are optional to meet the needs of different occasions.
- Family design - full range of spotlights, different needs and different choices, face rings can choose a variety of styles.
- Suitable for high-end hotels, villas clubs, high-end residential, for your business life to provide a more comfortable and healthy lighting space.

- 反射罩 6 色可选、满足不同场合需求。
- 家族化设计 - 全系列射灯、不同需求不同选择，面环可选用多种风格。
- 适合于高端酒店、别墅会所、高端住宅，为您的商务生活提供一个更舒适健康的照明空间。

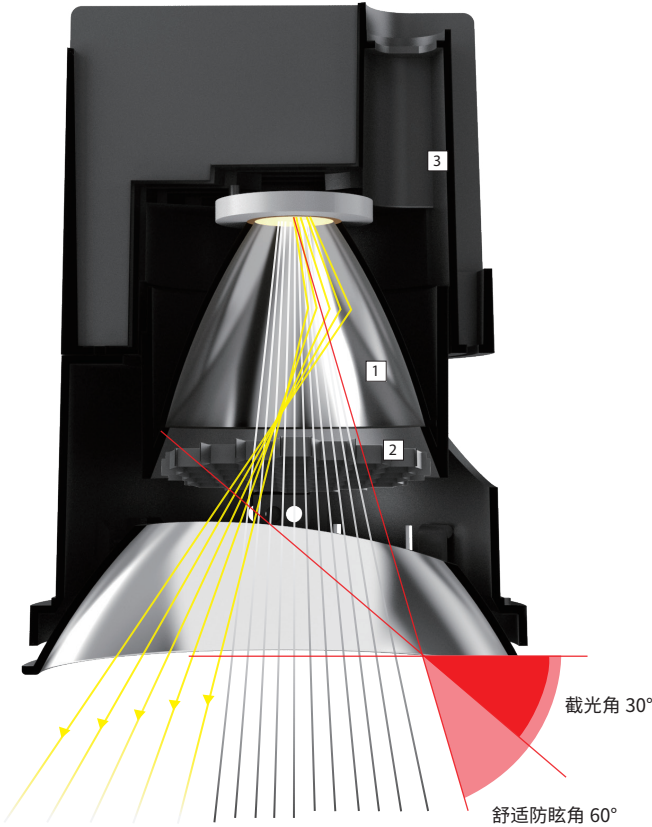

Dark light technology

Deep reflection cup, $UGR < 16$, lengthen the distance between light source and light outlet, improve the anti-glare performance. The light is filtered by the reflecting cup and the anti-glare honeycomb to effectively reduce the excess light beam.

深藏型反光杯、 $UGR < 16$ ，加长光源与出光口的距离、提高防眩性能，光线经过反光杯与防眩蜂窝的过滤、有效减少多余光束。

1 Deep reflective cup, providing anti-glare performance.

深藏型反光杯，提供防眩性能

2 Honeycomb Mesh, Effectively Prevent Excess Astigmatism.

蜂窝网格，有效阻止多余的散光

3 Die-casting aluminium radiator with higher heat dissipation efficiency.

压铸铝散热器，散热效率更高



Reflectors in different color
反射罩 6 色可选、满足不同场合需求。



Sand gold

White

Chrome


Silver



Pearl Black

Black

Modularization Design

模组化设计

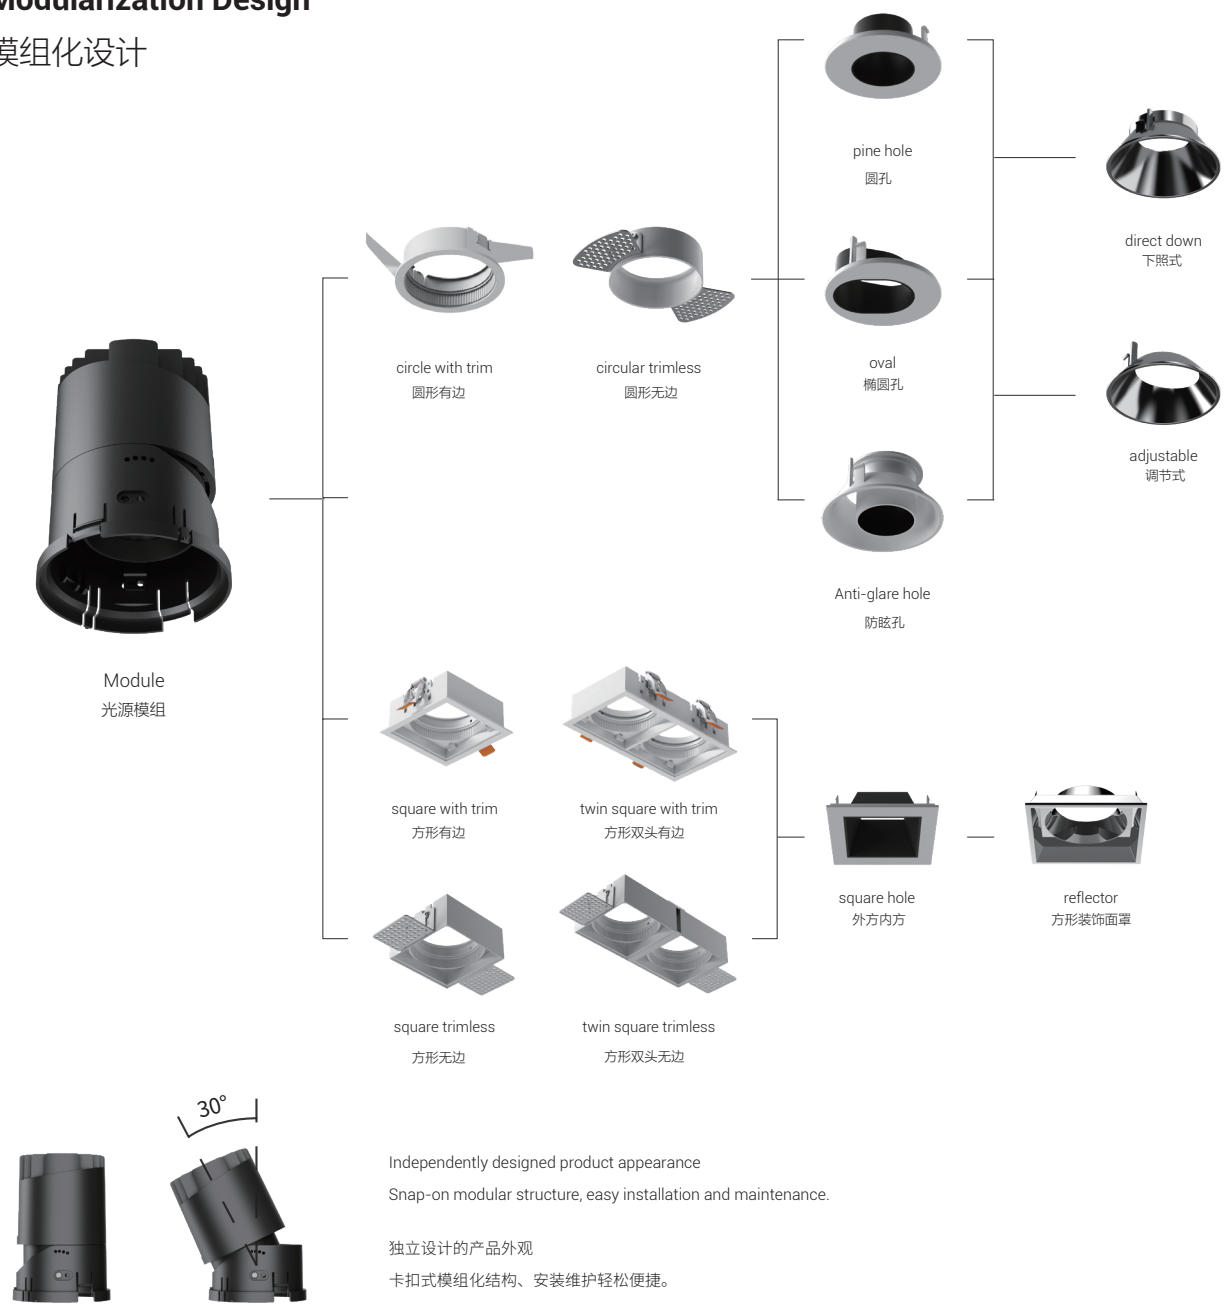



Family design


According to lighting effect and facial rings, various styles and light effects can be selected.
Each kind of facial ring has its own unique light effect.

根据照明效果、面环可选用多种风格多种光效
每一种面环都有其独特的光效。

Multiple Installation Structures

合理的安装结构能保持天花的简洁、自然，视觉一致性。

Reasonable installation structure can keep smallpox simple, natural and visual consistency.

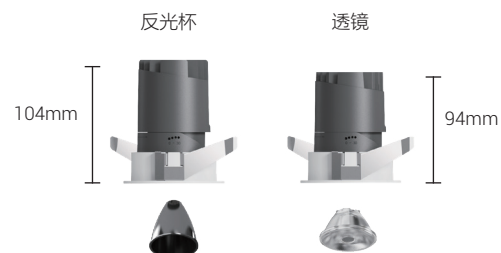

- 1 75mm aperture specifications have lens options, the whole lamp height is smaller, more suitable for low ceiling space scenarios.

75mm 开孔规格有透镜款可选，整灯高度更小，更适合低天花留空的场景使用
- 2 Independently designed product appearance, Fastener modular structure, easy installation and maintenance.

独立设计的产品外观
卡扣式模块化结构、安装维护轻松便捷
- 3 Reflector cover is precisely designed, electroplated and nano-sprayed. It has high reflection efficiency and provides comfortable light with high efficiency.

反射罩经过精密设计、采用电镀以及纳米喷漆技术
具有高反射效率、提供高效率的舒适光型



2-30mm





Quickly tighten the screws for easy installation
Suitable for all ceiling thicknesses up to 30mm.

快速拧紧螺钉、安装方便
适用于各种天花板厚度、最大可达 30mm。


Luminous efficiency

The lamp head can be rotated freely in all directions.
Let the light move with the heart and maximize the value of light.

灯头可前后左右全方位自由旋转
让光线可随心而动、发挥最大光效价值。

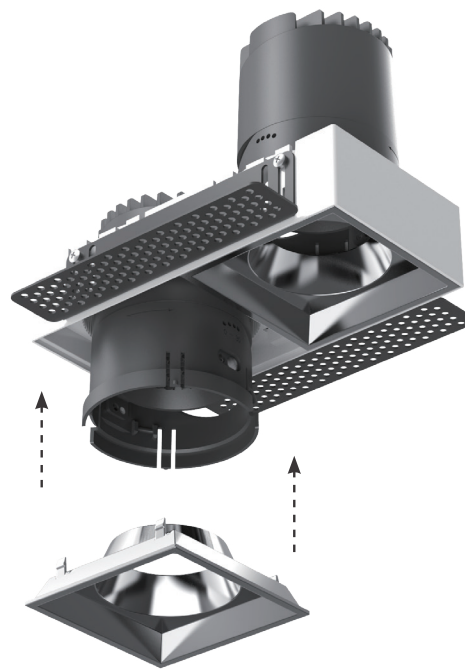



Linan 里南系列 - 7W

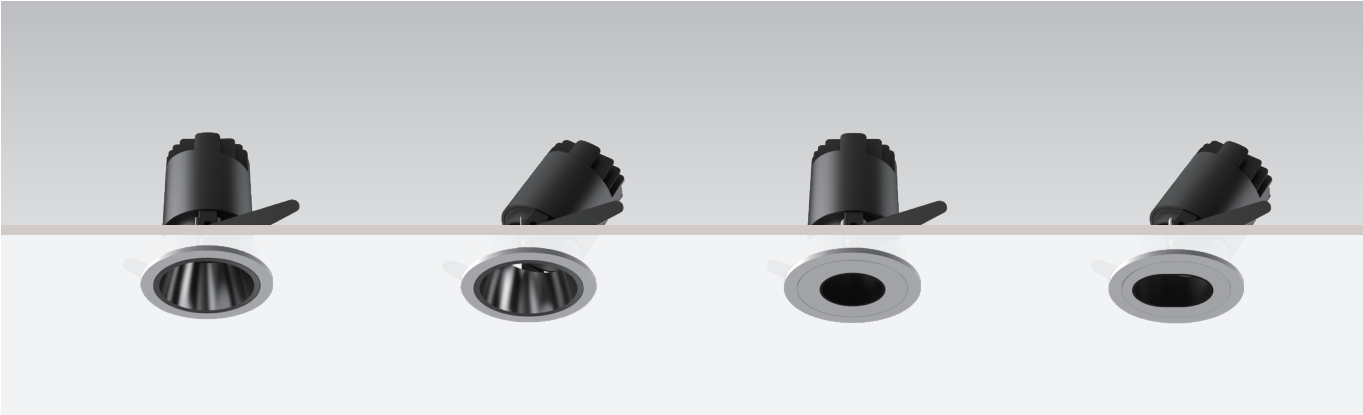

Colour:



Optional :



型号 /Model Code	L05197	L05198	L05199	L05201
功率 /Power	7W	7W	7W	7W
开孔 /Cut out	Φ50mm	Φ50mm	Φ50mm	Φ50mm
光源 /Light Source	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ60x75mm	Φ60x78mm	Φ60x75mm	Φ60x78mm
眩光值 /UGR	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20



NEW



Colour:




Optional :



型号 /Model Code	L05202	L05203	L05204
功率 /Power	9W	9W	9W
开孔 /Cut out	Φ55mm	Φ55mm	Φ55mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ63x76mm	Φ63x78mm	Φ63x76mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/55°	15°/24°/36°/55°	15°/24°/36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20


NEW

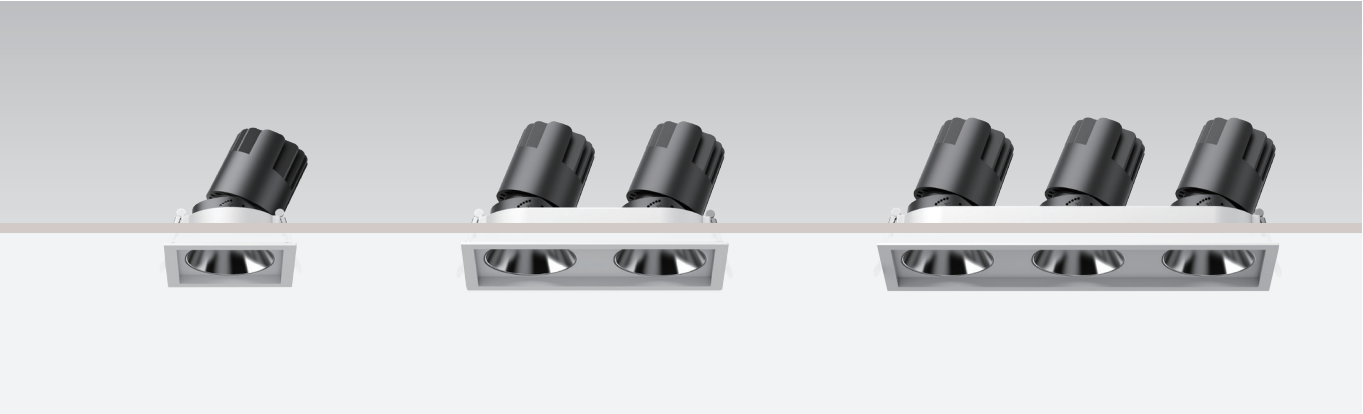

Colour:




Optional :

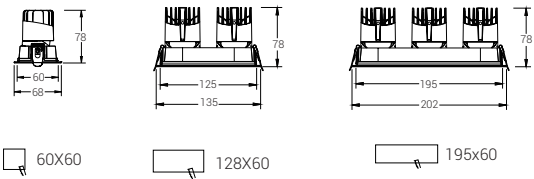

型号 /Model Code	L05205	L05206	L05207
功率 /Power	9W	2X9W	3X9W
开孔 /Cut out	60X60mm	128X60mm	195X60mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	68X68X78mm	135X68X78mm	202X68X78mm

眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/55°	15°/24°/36°/55°	15°/24°/36°/55°



色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20

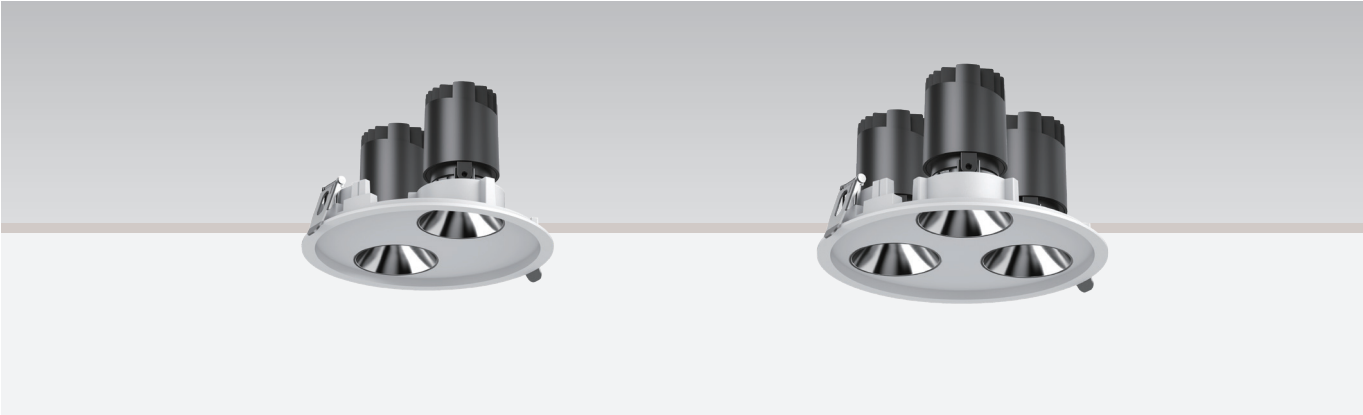

Colour:



Optional :

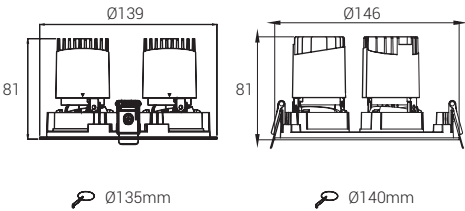

型号 /Model Code	L05208	L05209
功率 /Power	2x6W	3x6W
开孔 /Cut out	Ø135mm	Ø140mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	139X81mm	146X81mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/24°/38°	10°/15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h
防护等级 /IP	IP20	IP20


Linan 里南系列 - 11W




Colour:



Optional :




型号 /Model Code	L05210	L05211	L05212
功率 /Power	11W	11W	11W
开孔 /Cut out	Φ65mm	Φ65mm	Φ65mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ72.5x81mm	Φ72.5x83mm	Φ72.5x81mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/55°	10°/15°/ 24°/ 36°/55°	10°/15°/ 24°/ 36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20

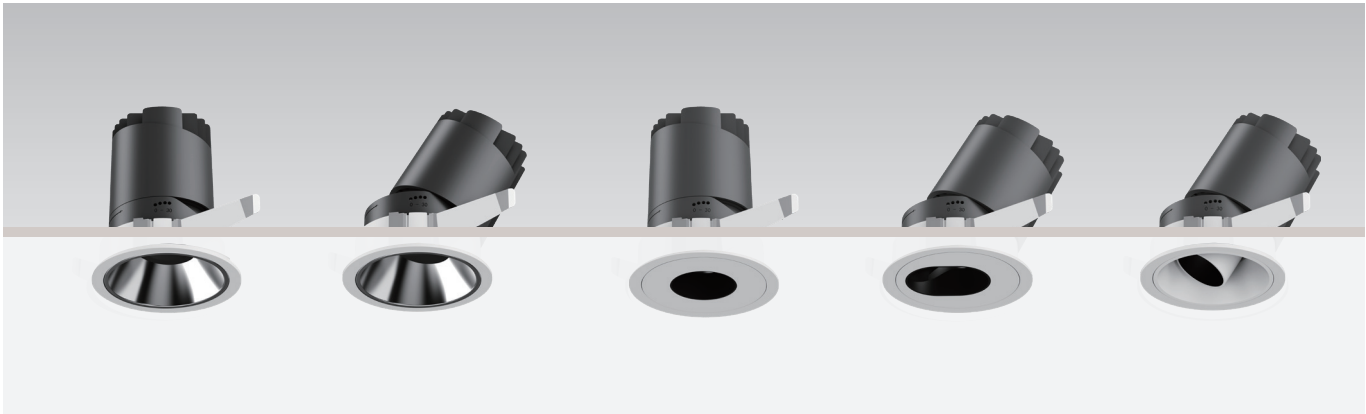

Colour:




Optional :



型号 /Model Code	L05213	L05214	L05215	L05216	L05217
功率 /Power	14W	14W	14W	14W	14W
开孔 /Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm	Φ75mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ85x105mm	Φ85x116mm	Φ85x105mm	Φ85x116mm	Φ85x116mm
眩光值 /UGR	<19	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20


Linan 里南系列 - 14W

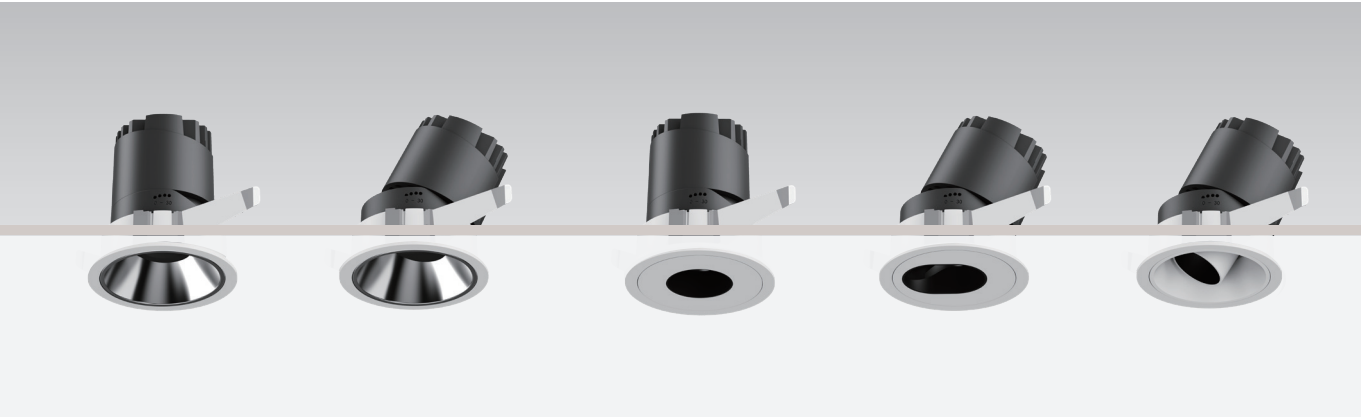


Colour:




Optional :




型号 /Model Code	L05218	L05219	L05220	L05221	L05222
功率 /Power	14W	14W	14W	14W	14W
开孔 /Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm	Φ75mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ85x94mm	Φ85x99mm	Φ85x94mm	Φ85x99mm	Φ85x99mm
眩光值 /UGR	<19	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 38°/55°	10°/15°/ 24°/ 38°/55°	10°/15°/ 24°/ 38°/55°	10°/15°/ 24°/ 38°/55°	10°/15°/ 24°/ 38°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

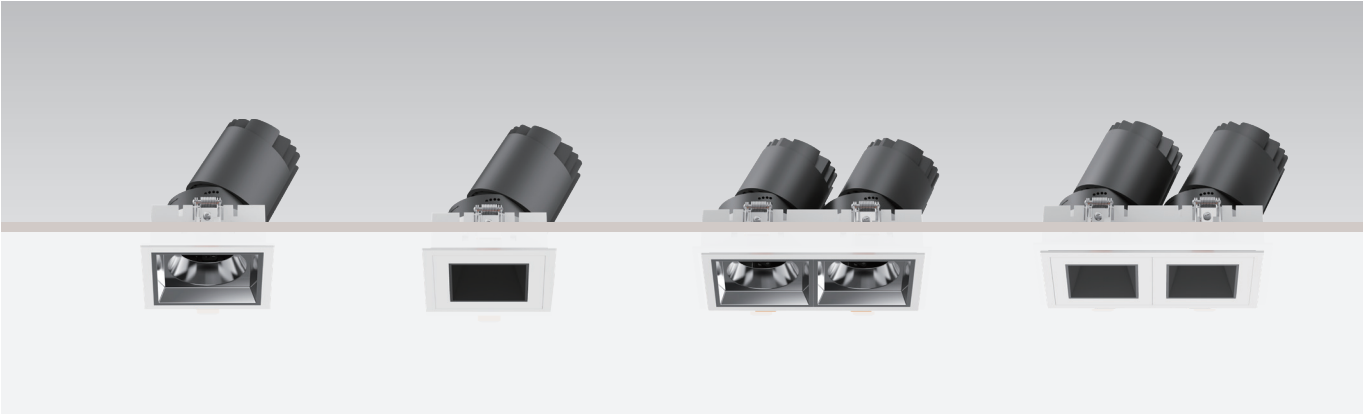

Colour:




Optional :

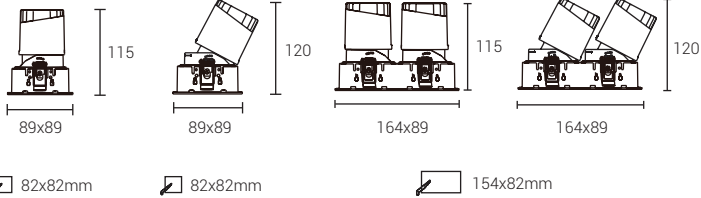


型号 /Model Code	L05223	L05224	L05225	L05226
功率 /Power	14W	14W	2x14W	2x14W
开孔 /Cut out	82x82mm	82x82mm	154x82mm	154x82mm
光源 /Light Source	CREE	CREE	CREE	CREE
尺寸 /Size(LxWxH)	89x89x120mm	89x89x120mm	164x89x120mm	164x89x120mm

眩光值 /UGR	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°


色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20

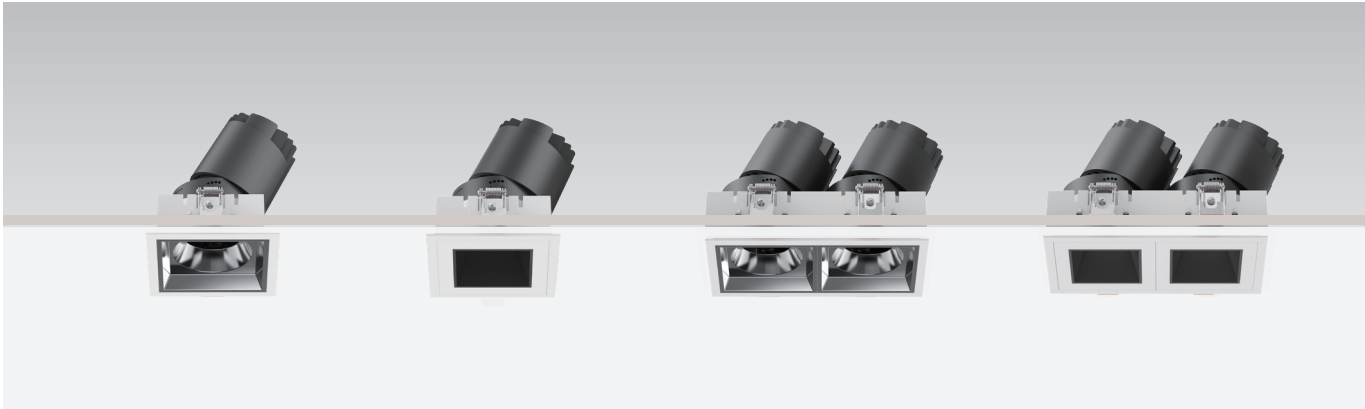

Colour:



Optional :

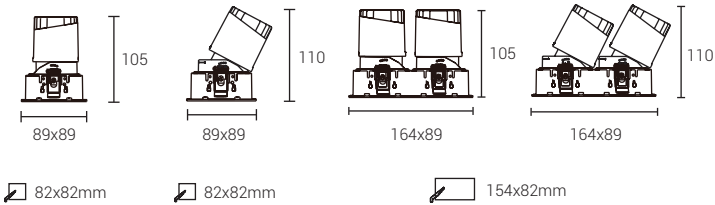

型号 /Model Code	L05227	L05228	L05229	L05230
功率 /Power	14W	14W	14W	14W
开孔 /Cut out	82x82mm	82x82mm	154x82mm	154x82mm
光源 /Light Source	CREE	CREE	CREE	CREE
尺寸 /Size(LxWxH)	89x89x110mm	89x89x110mm	164x89x110mm	164x89x110mm

眩光值 /UGR	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/55°	10°/15°/ 24°/ 36°/55°	10°/15°/ 24°/ 36°/55°	10°/15°/ 24°/ 36°/55°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20



Linan 里南系列 - 22W



Colour:



Optional :




型号 /Model Code	L05231	L05232	L05233	L05234	L05235
功率 /Power	22W	22W	22W	22W	22W
开孔 /Cut out	Φ95mm	Φ95mm	Φ95mm	Φ95mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ106x119mm	Φ106x126mm	Φ106x119mm	Φ106x126mm	Φ106x126mm
眩光值 /UGR	<19	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20



Colour:



Optional :



型号 /Model Code	L05236	L05237	L05238	L05239	L05240
功率 /Power	24W	24W	24W	24W	24W
开孔 /Cut out	Φ95mm	Φ95mm	Φ95mm	Φ95mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ106x116mm	Φ106x123mm	Φ106x116mm	Φ106x123mm	Φ106x123mm
眩光值 /UGR	<19	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24°/ 38°/ 60°	15°/ 24°/ 38°/ 60°	15°/ 24°/ 38°/ 60°	15°/ 24°/ 38°/ 60°	15°/ 24°/ 38°/ 60°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20


Linan 里南系列 - 30W



Colour:



Optional :




型号 /Model Code	L05241	L05242	L05243
功率 /Power	30W	30W	30W
开孔 /Cut out	Φ120mm	Φ120mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ132x145mm	Φ132x155mm	Φ132x155mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20



Colour:



Optional :



型号 /Model Code	L05244	L05245	L05246
功率 /Power	38W	38W	38W
开孔 /Cut out	Φ120mm	Φ120mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ132x139mm	Φ132x148mm	Φ132x148mm

眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°/50°	15°/24°/36°/50°	15°/24°/36°/50°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20


Linan 里南系列 - 38W



Colour:



Optional :



Ø150mm

型号 /Model Code	L05247	L05248	L05249
功率 /Power	38W	38W	38W
开孔 /Cut out	Φ150mm	Φ150mm	Φ150mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ162x154mm	Φ162x158mm	Φ162x158mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24°/ 38°/ 50°	15°/ 24°/ 38°/ 50°	15°/ 24°/ 38°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20





Linan 里南系列 - 7W



Colour:



Optional :

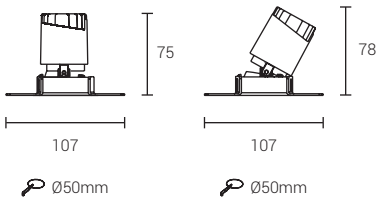

型号 /Model Code	L05250	L05251	L05252	L05253
功率 /Power	7W	7W	7W	7W
开孔 /Cut out	Φ50mm	Φ50mm	Φ50mm	Φ50mm
光源 /Light Source	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	107x75mm	107x78mm	107x75mm	107x78mm

眩光值 /UGR	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°	10°/15°/24°/38°



色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20



Colour:




Optional :

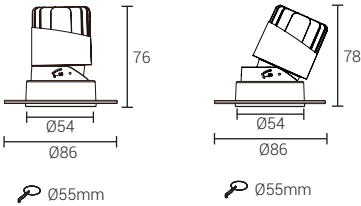

型号 /Model Code	L05254	L05255	L05256
功率 /Power	9W	9W	9W
开孔 /Cut out	Φ55mm	Φ55mm	Φ55mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ86xH76mm	Φ86xH78mm	Φ86xH76mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/55°	15°/24°/36°/55°	15°/24°/36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20



NEW

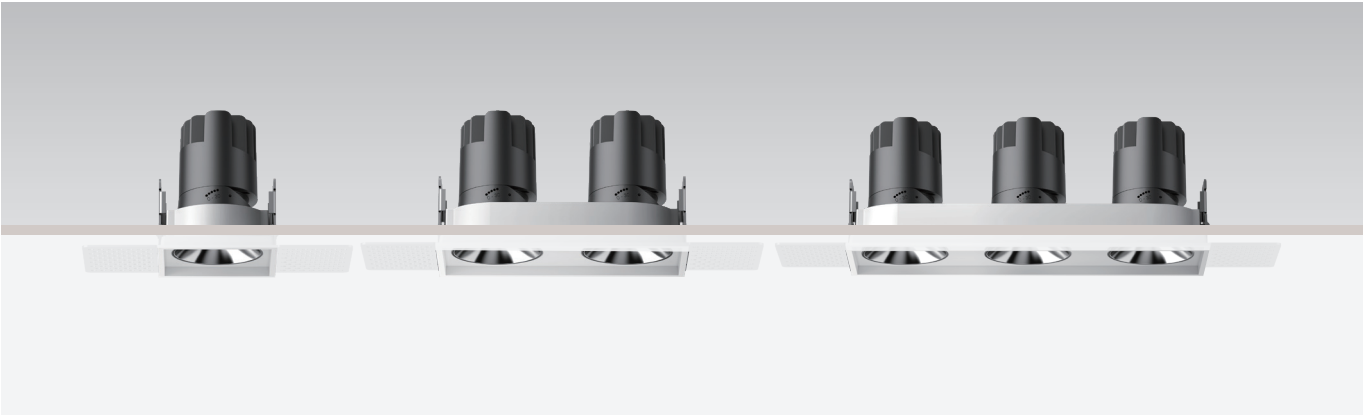

Colour:



Optional :

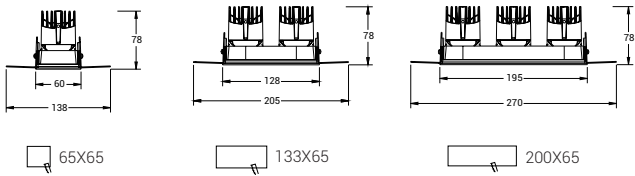



型号 /Model Code	L05257	L05258	L05259
功率 /Power	9W	2X9W	3X9W
开孔 /Cut out	65X65mm	133x65mm	200x65mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	138X60X78mm	205X60X78mm	272X60X78mm
眩光值 /UGR	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/55°	15°/24°/36°/55°	15°/24°/36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20



Colour:




Optional :

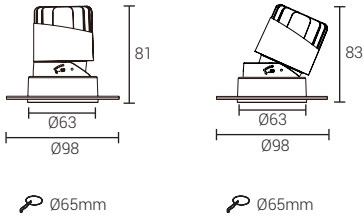

型号 /Model Code	L05260	L05261
功率 /Power	11W	11W
开孔 /Cut out	Φ65mm	Φ65mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ98x81mm	Φ98x83mm
眩光值 /UGR	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/24°/36°/55°	10°/15°/24°/36°/55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h
防护等级 /IP	IP20	IP20


Linan 里南系列 -14W

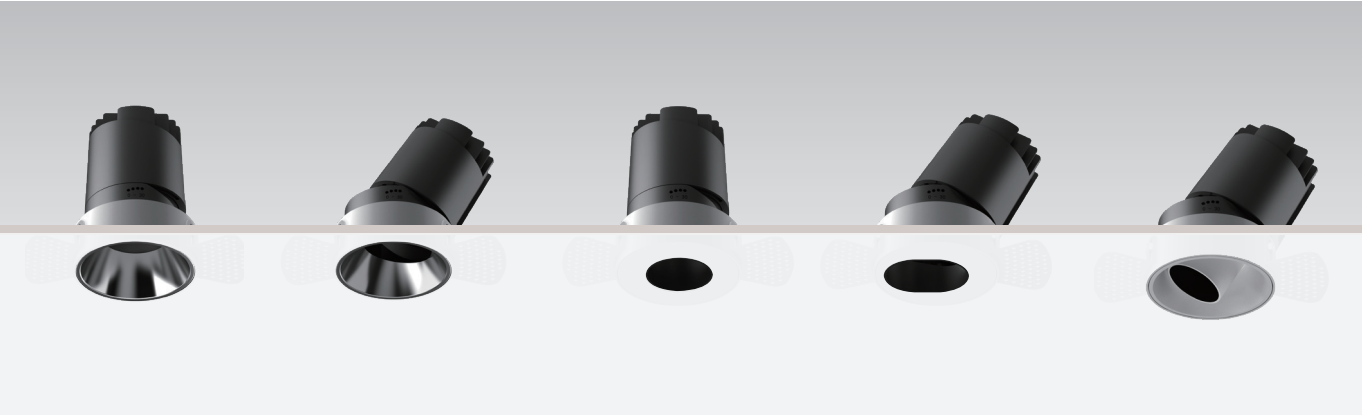

Colour:




Optional :

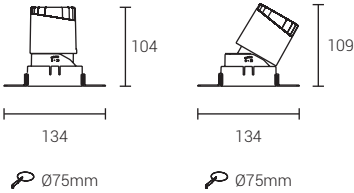


型号 /Model Code	L05262	L05263	L05264	L05265	L05266
功率 /Power	14W	14W	14W	14W	14W
开孔 /Cut out	Φ75mm	Φ75mm	Φ75mm	Φ75mm	Φ75mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	134x104mm	134x109mm	134x104mm	134x109mm	134x109mm
眩光值 /UGR	<19	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20




Colour:



Optional :

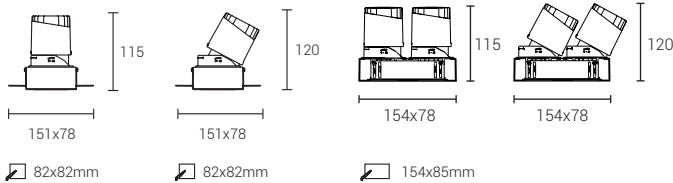


型号 /Model Code	L05267	L05268	L05269	L05270
功率 /Power	14W	14W	2x14W	2x14W
开孔 /Cut out	82x82mm	82x82mm	154x85mm	154x85mm
光源 /Light Source	CREE	CREE	CREE	CREE
尺寸 /Size(LxWxH)	151x78x120mm	151x78x120mm	154x78x120mm	154x78x120mm
眩光值 /UGR	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20

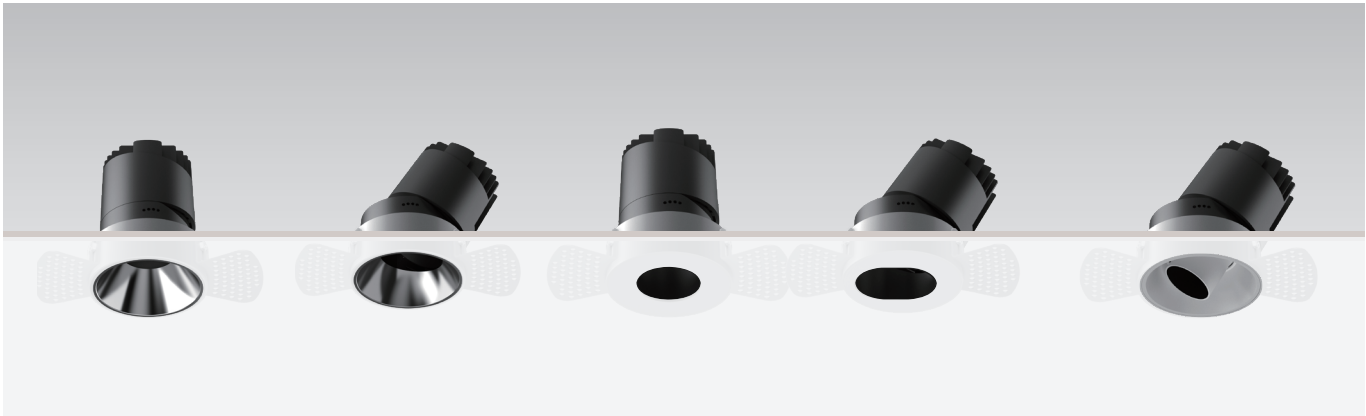

Colour:



Optional :



型号 /Model Code	L05271	L05272	L05273	L05274	L05275
功率 /Power	24W	24W	24W	24W	23W
开孔 /Cut out	Φ95mm	Φ95mm	Φ95mm	Φ95mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	162x116mm	162x116mm	162x116mm	162x116mm	162x116mm
眩光值 /UGR	<19	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°/50°	15°/24°/38°/50°	15°/24°/38°/50°	15°/24°/38°/50°	15°/24°/38°/50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20


Linan 里南系列 -30W



Colour:



Optional :

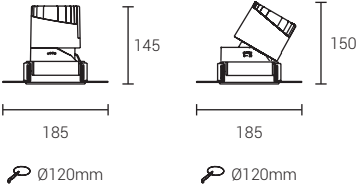


型号 /Model Code	L05276	L05277	L05278
功率 /Power	30W	30W	30W
开孔 /Cut out	Φ120mm	Φ120mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	185x145mm	185x150mm	185x150mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20



Colour:



Optional :

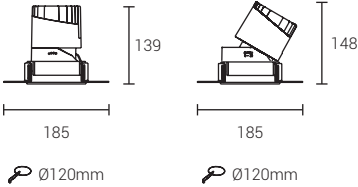

型号 /Model Code	L05279	L05280	L05281
功率 /Power	38W	38W	38W
开孔 /Cut out	Φ120mm	Φ120mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	185x139mm	185x148mm	185x148mm

眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15° / 24° / 38° / 50°	15° / 24° / 38° / 50°	15° / 24° / 38° / 50°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20