



双光源


双光源，二合一，聚光照明 + 泛光照明，可做
CCT+RGB，适用多种场景。

Dual light source, two in one, spot lighting+floodlighting, can
be CCT+RGB, suitable for various scenarios.


家族化设计 | Family Design



Egg 艾格系列

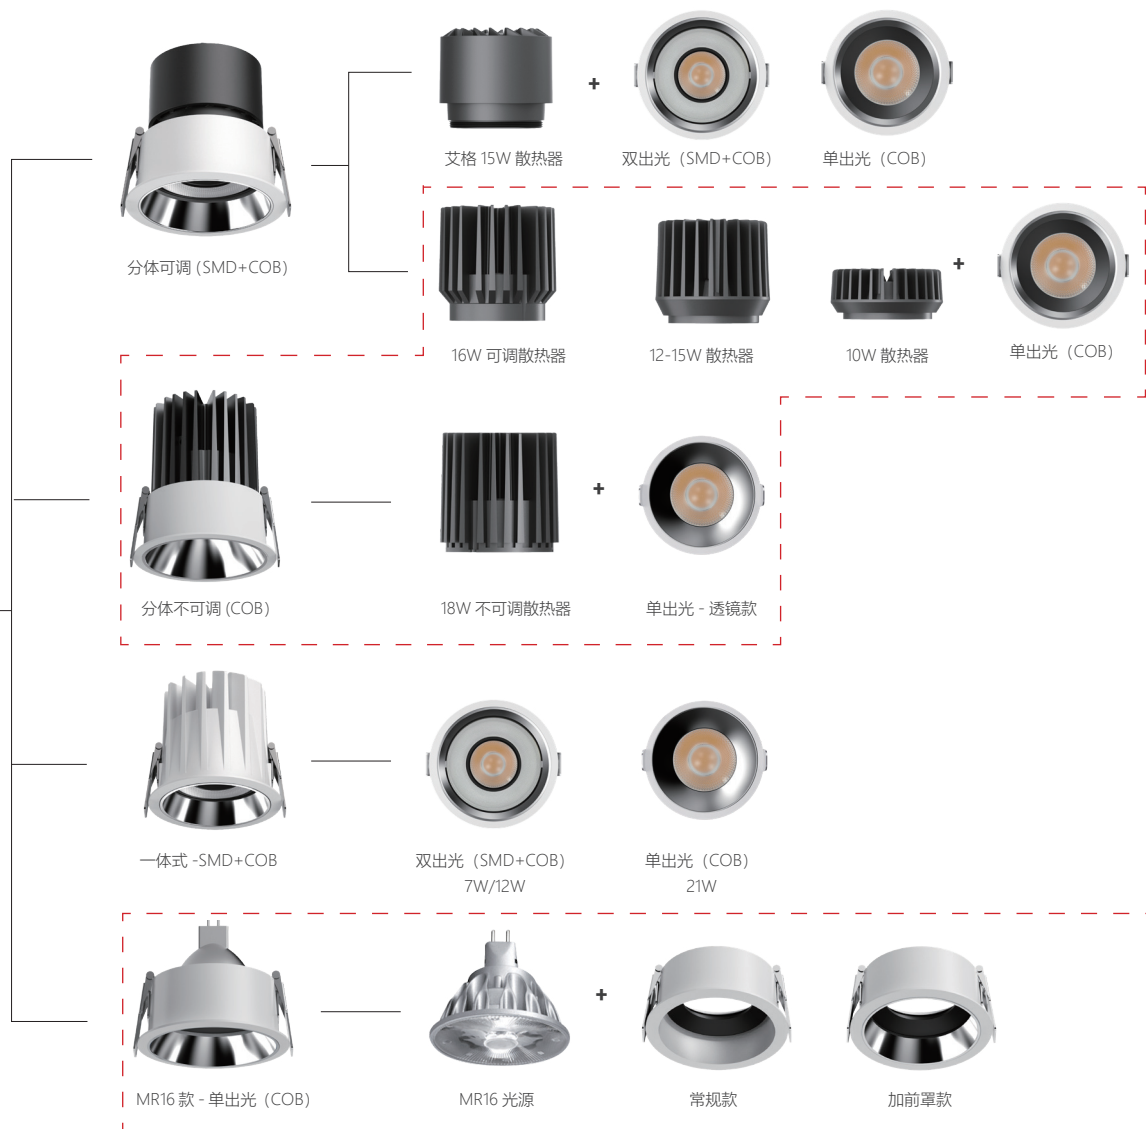


Split structure
结构分解

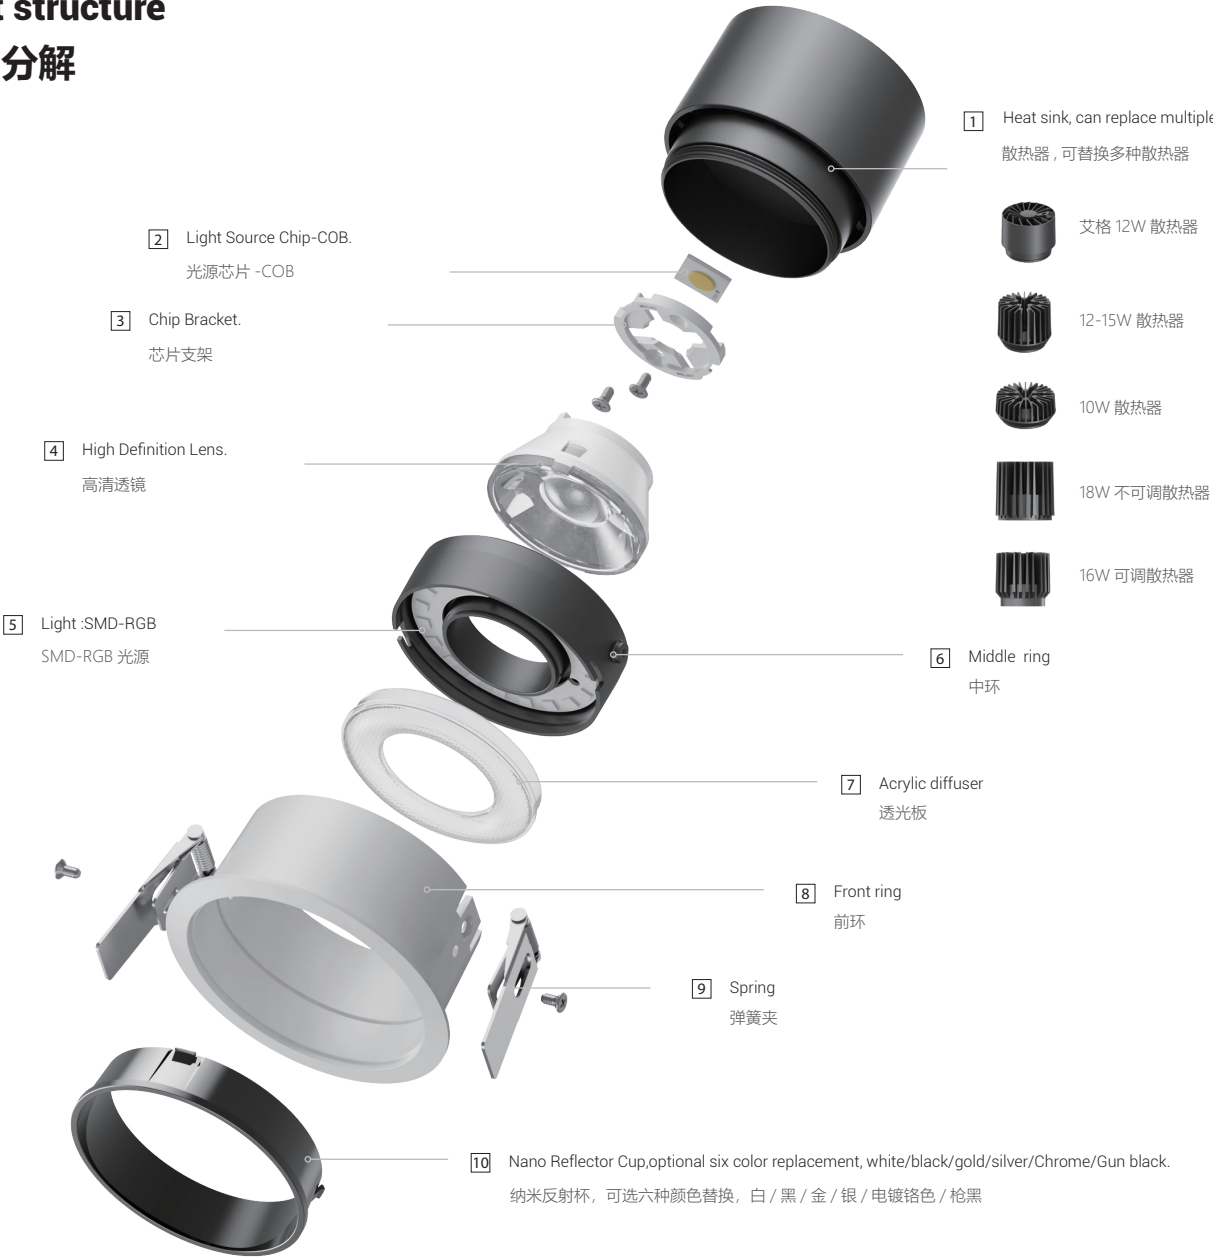

5 种散热器可随需切换

5 different heatsink can match



18W 不可调



12-15W 可调




12W 可调




16W 可调




10W 可调

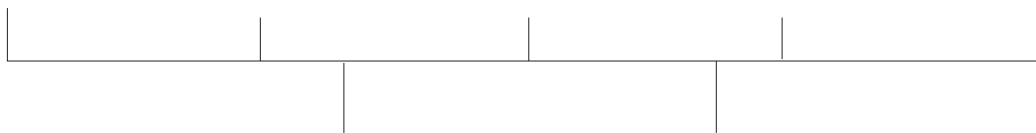

双出光 (SMD+COB)




单出光 (COB)



1~30mm 适用于各种板材厚度

多种弹簧可配，快速安装，适用于各种天花板厚度

A variety of springs are available for quick installation,
suitable for various ceiling thicknesses

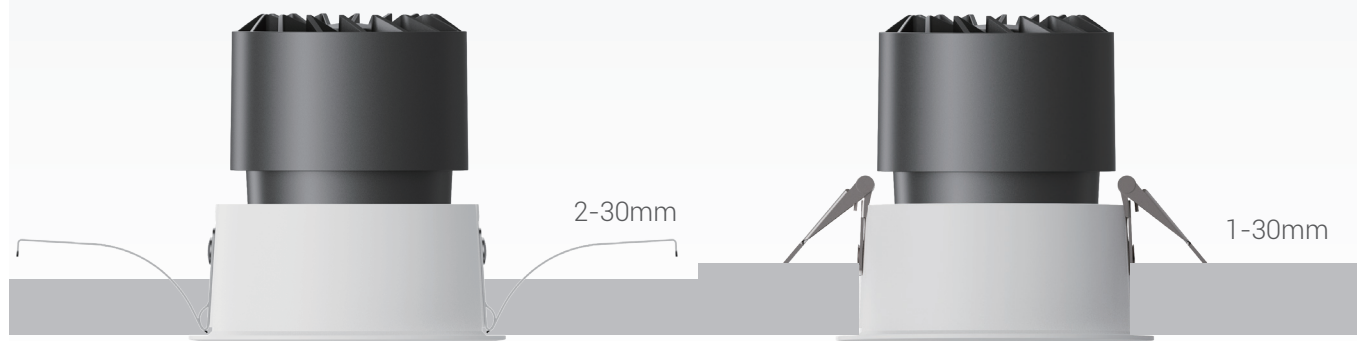

折弯弹片
Bending spring piece

弹簧夹
Nickel plated spring




低眩光 穿透力强

LOW GLARE STRONG PENETRATION



COB 效果

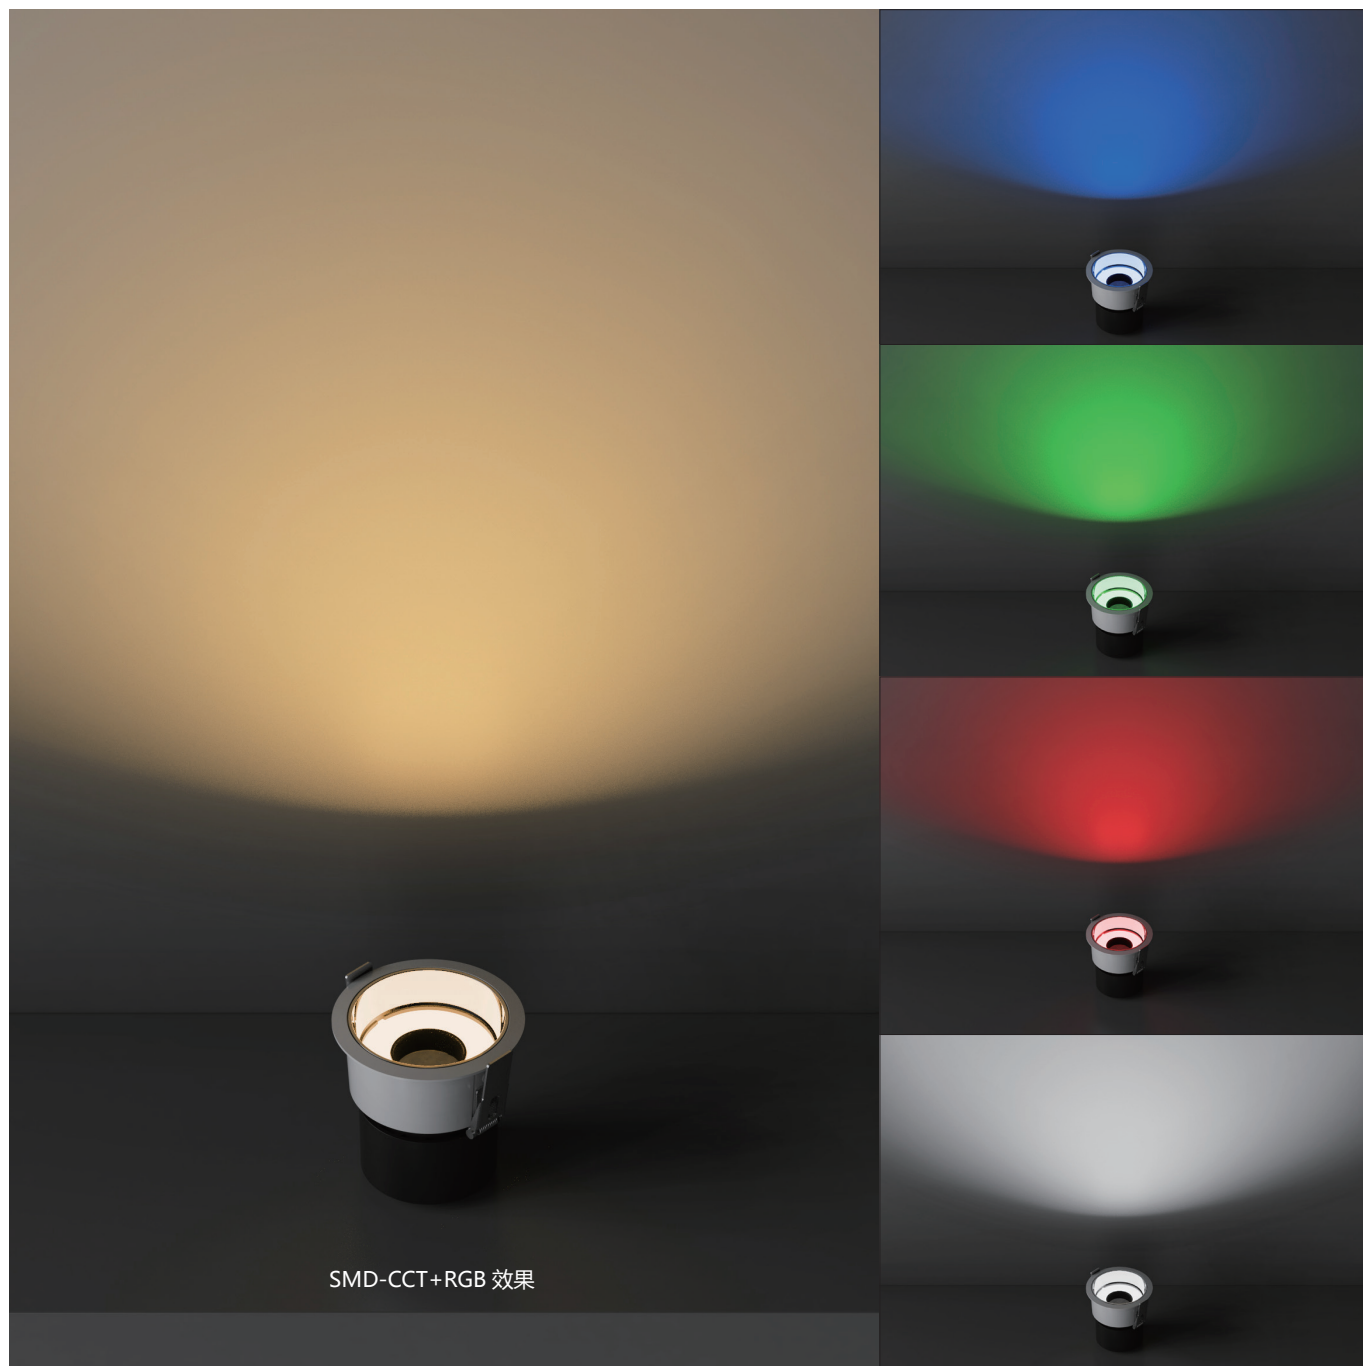

一体式结构

采用压铸铝灯体一体化结构设计，外观精致，
散热效果极佳，方便安装。

Adopting die-casting aluminium lamp body
integrated structure, exquisite appearance, excellent heat
dissipation, easy to install.



- 一体式 -SMD+COB



L05306

尺寸 /Size(WxH): Ø82X83.5mm

摆角 /Swing angle: 15°

开孔 /Cutout: Φ75mm


光束角 /Beam angle: 15°/24°/36°/60°

功率 /Power: 7W(SMD)

功率 /Power: 12W(COB)

色温 /CCT: RGB/Y/W,2700K~6500K

选配支架 /Standard holder: 1304/1507



NEW



L05307

尺寸 /Size(WxH): Ø82X80mm

摆角 /Swing angle: /

开孔 /Cutout: Φ75mm


光束角 /Beam angle: 15°/24°/36°/60°

功率 /Power: 7W(SMD)

功率 /Power: 12W(COB)

色温 /CCT: RGB/Y/W,2700K~6500K

选配支架 /Standard holder: 1304/1507






- 单出光 - COB




L05308

尺寸 /Size(WxH): Ø82X83.5mm
 摆角 /Swing angle: 15°
 开孔 /Cutout: Φ75mm
 光束角 /Beam angle: 15°/24°/36°/60°
 功率 /Power: 15W(COB)
 色温 /CCT: 2700K~6500K
 选配支架 /Standard holder: 1304/1507



L05309


尺寸 /Size(WxH): Ø82X80mm
 摆角 /Swing angle: /
 开孔 /Cutout: Φ75mm
 光束角 /Beam angle: 15°/24°/36°/60°
 功率 /Power: 21W(COB)
 色温 /CCT: 2700K~6500K
 选配支架 /Standard holder: 1304/1507




L05310

定制款

尺寸 /Size(WxH): Ø82X84.5mm
 摆角 /Swing angle: 15°
 开孔 /Cutout: Φ75mm
 光束角 /Beam angle: 15°/24°/36°/60°
 功率 /Power: 12W(COB)
 色温 /CCT: 2700K~6500K
 选配支架 /Standard holder: 1507



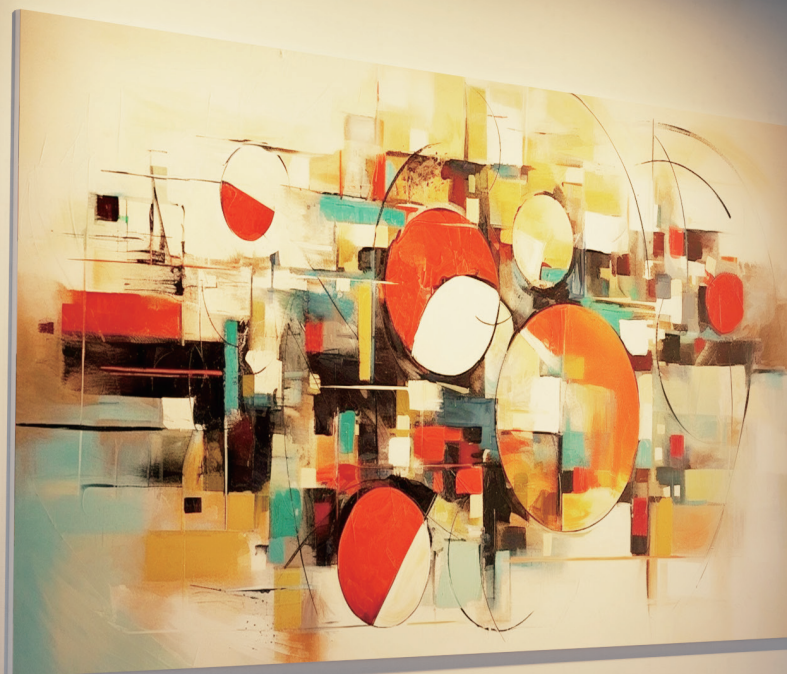

科勒 - 偏光洗墙灯


Koler-Polarized wall washer

科勒系列偏光洗墙灯，防眩光罩采用精确的光线控制，像光幕一样洗出均匀的光斑；嵌入式安装时，发光端与天花板顶部平切。

洗墙光斑的分布比例为 0.8（离墙）：3（高）：0.8（宽）。

Koler series polarized wall washer, anti-glare cover using accurate light control, like a light curtain to wash out uniform light spots; For recessed installation, the luminous end is cut flush with the ceiling top.


The distribution ratio of the wall washing spot is 0.8 (away from the wall) : 3 (high) : 0.8 (wide).

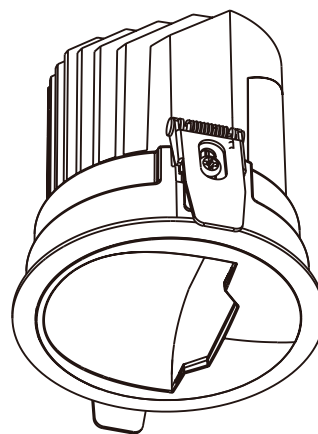

PRODUCT FUNCTION INTRODUCTION 产品功能介绍

科勒 - 偏光洗墙灯

Koler-Polarized wall washer



• 低眩光高光效:

特殊设计自由曲面反光杯加防眩罩，精准光路
主动防眩，出光效率高

Specially designed free-form reflective cup with anti-glare cover, accurate light path, active anti-glare, with higher light efficiency

• 超强混光性能:

独特的微鳞甲格纹，单色和双色温混光都均匀
Super turnable white performance

• 无暗区洗墙光斑:

洗墙起始光斑与天花板顶端切齐
Wall washing with no dark area

• 多盏拼接洗墙佳:

可无缝拼接洗墙，光斑均匀过渡，无亮暗条纹

The splicing of multiple lamps has a better wall washing effect

• 多样尺寸:

天花开孔 55/75/95mm

Ceiling Cutout 55/75/95mm

• 多款颜色:

两款颜色防眩罩可选：镀铬 + 电镀黑


Two color anti-glare covers available: chrome +electroplated black


• 材料更优:

耐高温材料，反光杯耐温 140℃

High temperature resistant material, reflective cup temperature 140℃



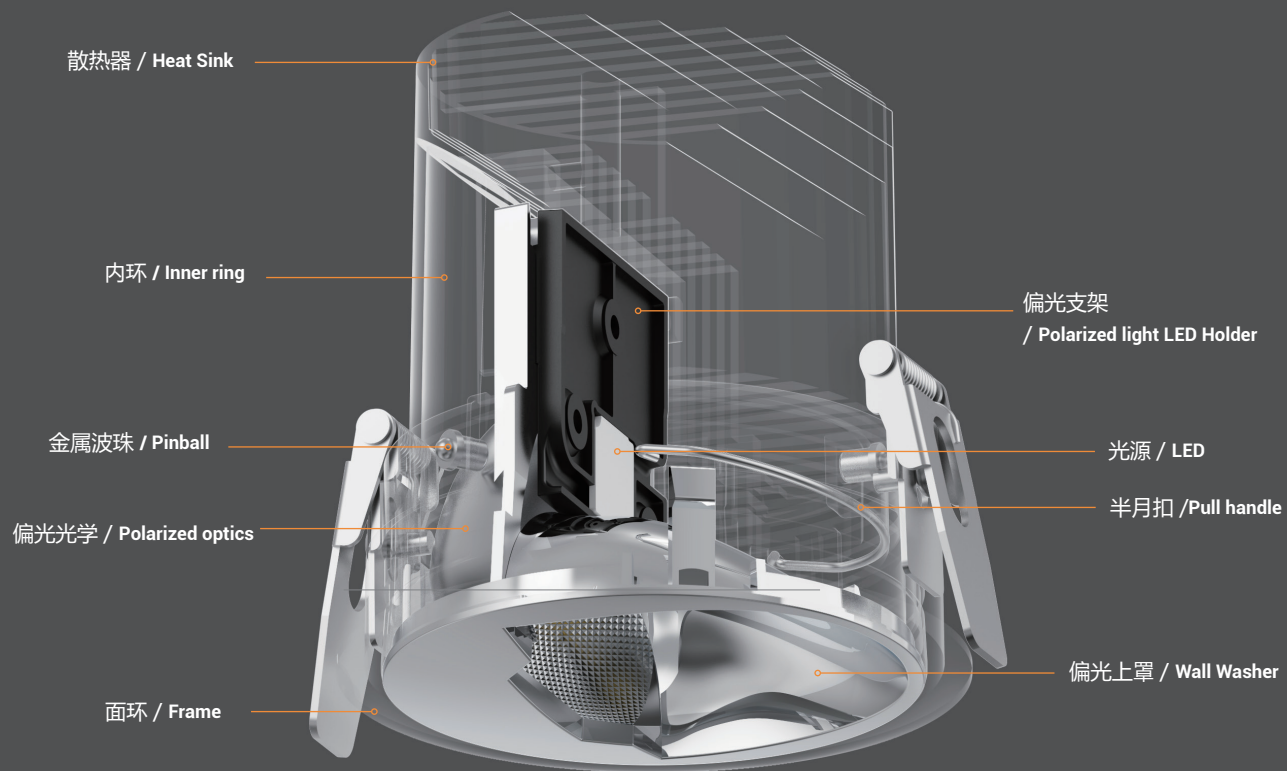

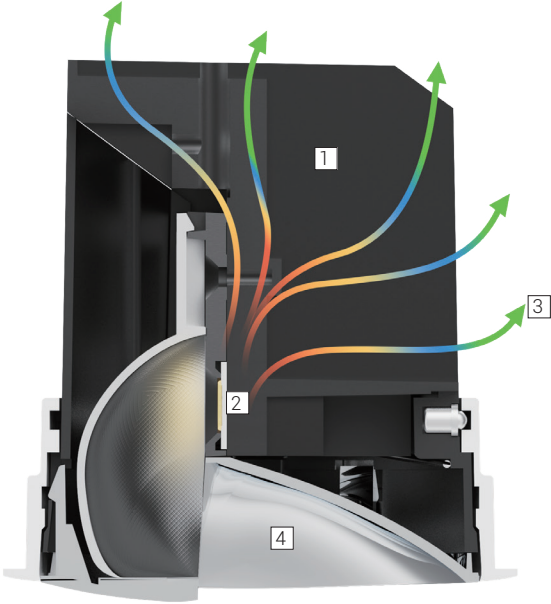

1

内胆可拆卸并可水平旋转 360°。
Removable lamp
liner,Horizontal rotation 360°.

2




侧装光源，二次反射后光线变柔和均匀，
精准无死角的一体洗墙。
Side mounted light source, with soft
and uniform light after secondary
reflection, accurately illuminating the
entire wall.

3

独创散热结构设计，改善灯具的空气对流动
力学性能，提高灯具散热性能，延长灯
具寿命。
Innovative heat dissipation structure
design improves the aerodynamic
performance of air convection in lamps,
enhances heat dissipation performance,
and extends the lifespan of lamps.


3

洗墙防眩光罩 - 通过遮挡一半面圈，达到
单面出光的效果，独特的出光方式让光线
更加纯粹均匀的满铺墙面（镀铬 + 电镀
黑）。
Wall washer anti glare cover - By blocking
half of the face circle, it achieves the effect
of single side light output. The unique light
output method makes the light more pure
and uniform, and the wall is fully covered.



可拆卸内胆，方便安装

Removable lamp liner

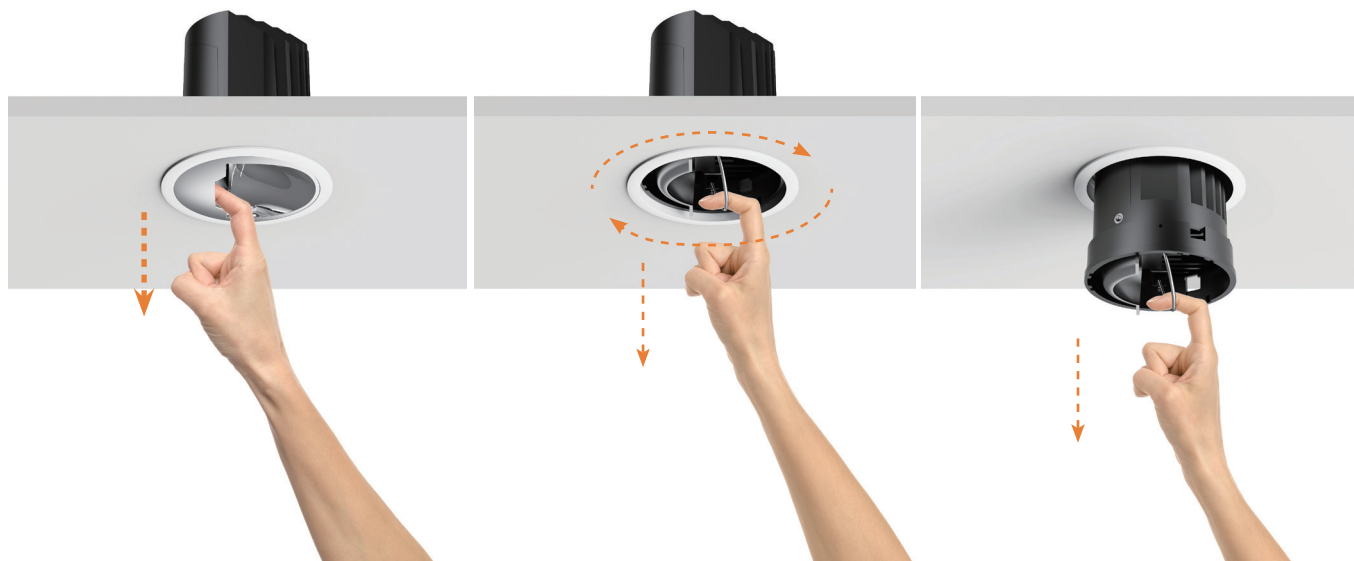

①

用手指向下扣出反射罩

Convenient pick-up

②

拉动半月扣，可旋转调节或向下取出内胆

Pull the handle to rotate and adjust,take out the inner liner


③

向下取出内胆

Take out the inner liner


灵活调整

Flexibly adjust

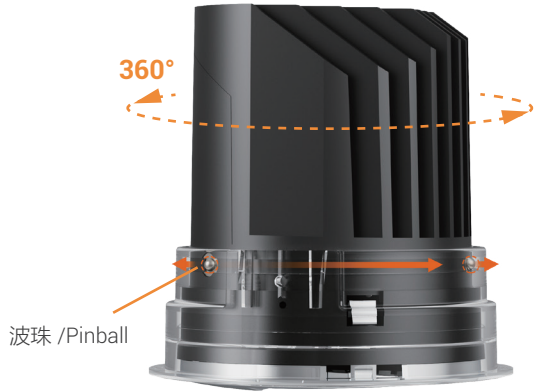

内环安装了三颗金属波珠，固定在面环卡槽内，
实现内胆固定和水平旋转 360°

Relying on three metal pinball to achieve 360
° horizontal free rotation

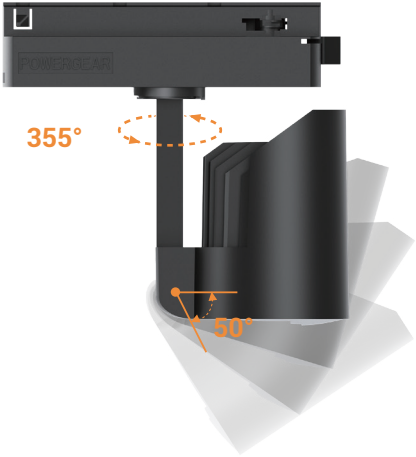

轻松旋转照射方向，结合轨道移动
实现精准打光

Easily rotate the irradiation direction,
combined with orbital movement achieve accurate lighting

洗墙比例

Wall washer ratio


0.8: 3: 0.8

嵌入式安装时出光端与天花顶部切平，洗墙的光斑分布比例 0.8(离墙) : 3(高) : 0.8(宽)。



During embedded installation, the light emitting end is cut flat with the top of the ceiling, and the distribution ratio of light spots for wall washing is 0.8 (away from the wall): 3(high): 0.8 (wide).

注：安装比例仅供参考，请根据实际墙高做调节。

Adjust according to the actual wall height

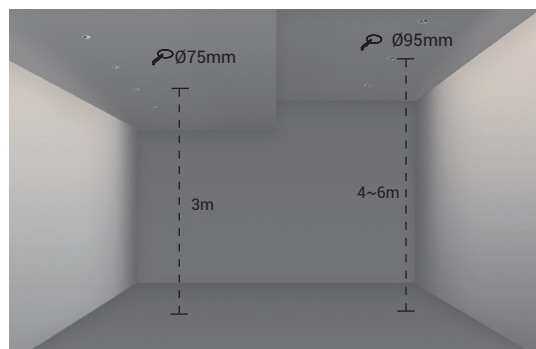

建议楼层 3m 使用开孔 75 的灯具，4~6m 使用开孔 95 灯具。

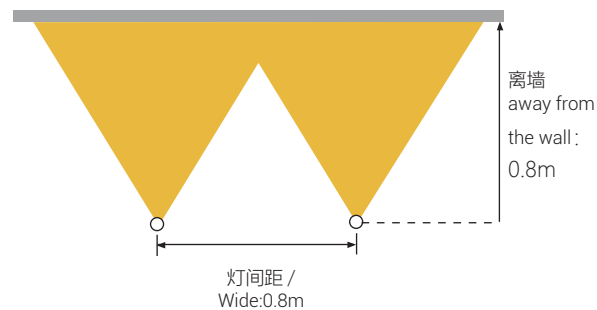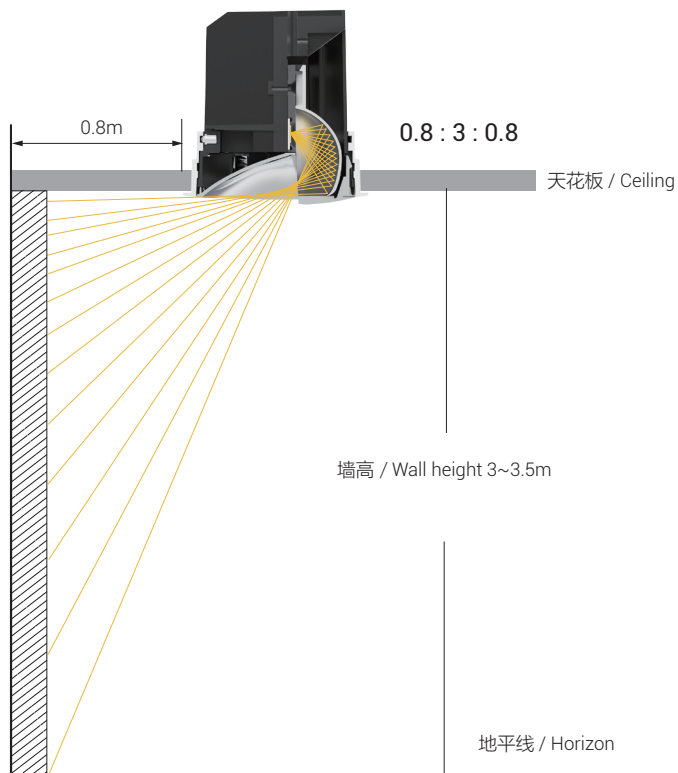

灯具安装间距 / Luminaire installation spacing



15°

灯具起始出光倾角: 15°

Tilting Angle: 15°



实景拍摄：层高 :3.3m/Φ75/4000K

多盏拼接洗墙佳， 洗出幕布般的光斑


可无缝拼接洗墙，光斑均匀过渡，无亮暗条纹


Seamless splicing wall washing, light spot uniform transition, no bright and dark stripes



借助如彩色光幕般的洗墙效果，为空间营造出别具一格的视觉体验，引发情感共鸣与思考，使人们于空间之中切实感受到艺术与环境的交融。

Using the colorful light - screen - like wall - washing effect, we craft a unique space look. It stirs emotions, sparks thoughts, and helps people feel art and environment merging.

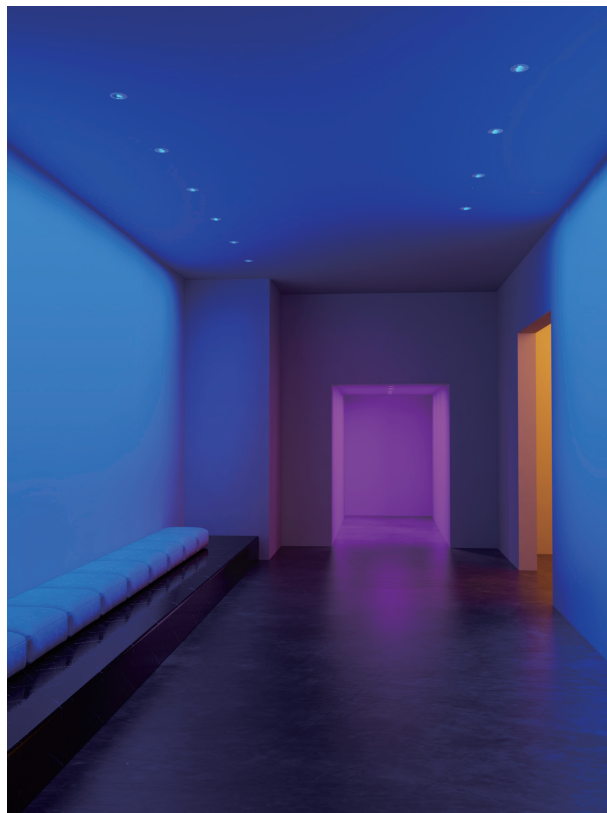

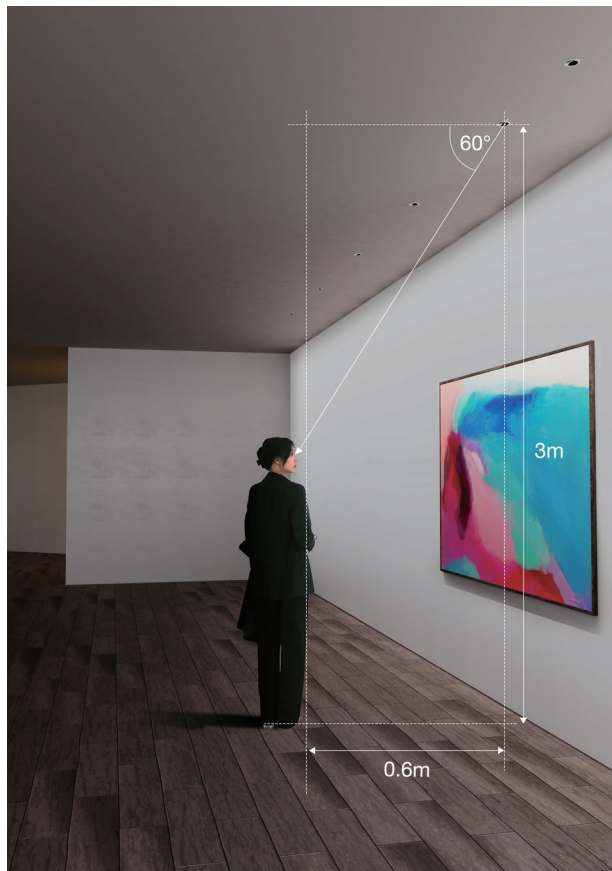


在艺术展厅，灯光的运用至关重要。

koler 洗墙灯独特的光学设计可避免光线直射人眼，有效防眩。即使站在距离灯安装位置仅 0.6m 的位置下，也不眩眼，UGR 为负值，让每一次欣赏，都沉浸在舒适无扰的光影氛围中。

In an art exhibition hall, lighting plays a pivotal role. The Koler wall - washer lamp features a distinctive optical design that effectively shields the eyes from direct light, minimizing glare significantly. Even when one stands merely 0.6m from the lamp's installation point, there is no discomfort from glare. With a negative UGR (Unified Glare Rating), it ensures that every viewing experience is steeped in a comfortable, glare - free light - shadow ambiance.


实测参数: U:221.15V I:0.0629A P:7.8868W PF:0.5673 Freq:50.00Hz 实测光通:428.983x1 lm		
灯具名称: KL-1016E55	灯具类型: 嵌入式射灯	灯具重量: /
灯具规格: 180mA	外置尺寸: ø55	测试编号: 1
制造厂商:	发光口面: 35	遮光角: 35°

光源数据		光度数据		光效: 54.39 lm/W	
型号	普瑞V6HD-8.5代	峰值光强 (cd)	483.9	S/MH (C0/180)	0.12
标称功率 (W)	7	灯具效率 (%)	100.0	S/MH (C90/270)	0.63
额定电源电压 (V)	220	总光通量 (lm)	428.98	η UP, DN (C0~180)	0.2, 91.7
额定光通量 (lm)	428.983	CIE分类	直接	η UP, DN (C180~360)	1.1, 7.0
灯具内光源数 (只)	1	上射光通比 (%)	1.3	CIBSE SHR NOM	0.00
实测电源电压 (V)	220	下射光通比 (%)	98.7	CIBSE SHR MAX	1.00

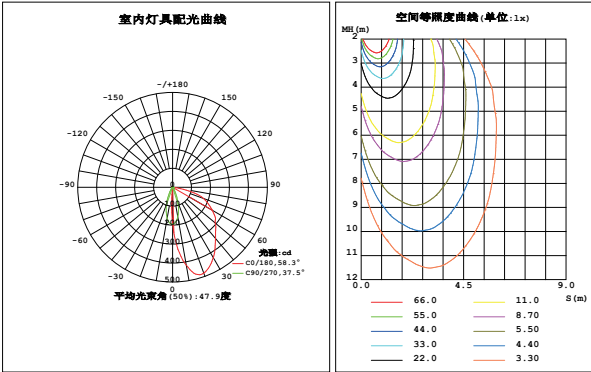

实测参数: U:221.06V I:0.0950A P:11.975W PF:0.5701 Freq:50.00Hz 实测光通:693.105x1 lm		
灯具名称: KL-1016E75	灯具类型: 嵌入式射灯	灯具重量: /
灯具规格: 300mA	外置尺寸: ø75	测试编号: 1
制造厂商:	发光口面: 35	遮光角: 35°


光源数据		光度数据		光效: 57.88 lm/W	
型号	普瑞V6HD-8.5代	峰值光强 (cd)	1065	S/MH (C0/180)	0.08
标称功率 (W)	12	灯具效率 (%)	100.0	S/MH (C90/270)	0.63
额定电源电压 (V)	220	总光通量 (lm)	693.11	η UP, DN (C0~180)	0.2, 95.4
额定光通量 (lm)	693.105	CIE分类	直接	η UP, DN (C180~360)	1.1, 3.3
灯具内光源数 (只)	1	上射光通比 (%)	1.4	CIBSE SHR NOM	0.00
实测电源电压 (V)	220	下射光通比 (%)	98.6	CIBSE SHR MAX	1.00

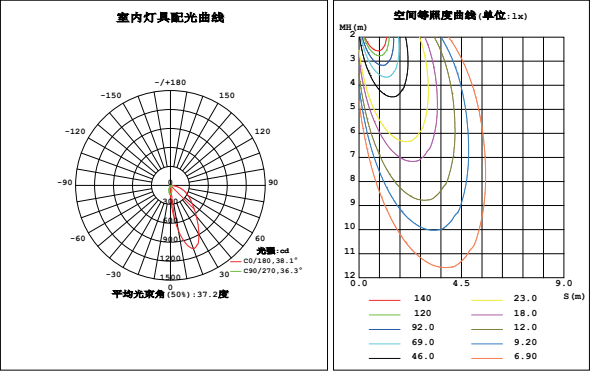

注：测试结果仅供参考

实测参数: U:221.07V I:0.1719A P:22.743W PF:0.5985 Freq:50.00Hz 实测光通:1415.03x1 lm		
灯具名称: KL-1016E95	灯具类型: 嵌入式射灯	灯具重量: /
灯具规格: 780mA	外置尺寸: ø95	测试编号: 1
制造厂商:	发光口面: 35	遮光角: 35°

光源数据		光度数据		光效: 62.22 lm/W	
型号	普瑞V10A-8.5代	峰值光强 (cd)	2196	S/MH (C0/180)	0.07
标称功率 (W)	25	灯具效率 (%)	100.0	S/MH (C90/270)	0.67
额定电源电压 (V)	220	总光通量 (lm)	1415.0	η UP, DN (C0~180)	0.3, 94.0
额定光通量 (lm)	1415.03	CIE分类	直接	η UP, DN (C180~360)	1.2, 4.4
灯具内光源数 (只)	1	上射光通比 (%)	1.6	CIBSE SHR NOM	0.00
实测电源电压 (V)	220	下射光通比 (%)	98.4	CIBSE SHR MAX	1.00

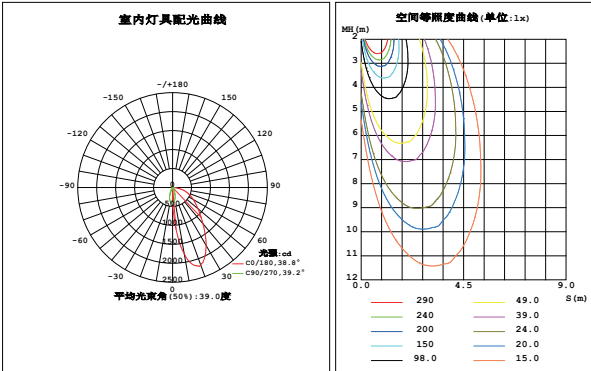

IES:


型号 Model 功率 Power 光效 Eff

KL-1016E55 8W 70~90 lm/W

KL-1016E75 13.5W 80~100 lm/W

KL-1016E95 26W 80~100 lm/W

无论是目测还是实测，
防眩光效果优秀
Whether it is visual or measured, the
anti-glare effect is excellent!

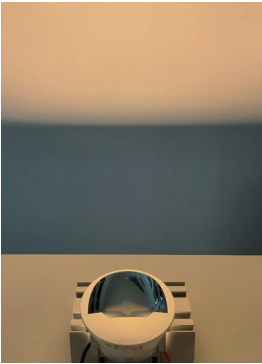

Multiple choice

多种选择

科勒系列除了内嵌入式，还设计了单头双头吊装式、轨道式、明装式，巧妙的与墙壁组合，可应用于各个区域，在提升空间品质的同时，增加了空间的采光，弱化了空间的封闭感，使静态的陈设富于光影变化，产生空间拓展的效果。

Koler series in addition to embedded, also designed a single head double head lifting type, track type, Surface type, smart combination with the wall, can be applied to various areas, while improving the quality of the space, increase the lighting of the space, weaken the sense of closure of the space, make the static furnishings rich in light and shadow changes, produce the effect of space expansion.



外露嵌入式 / Pendant embedded



内嵌入式 / Embedded



轨道式 / Track type




一体轨道式 / Integrated orbit-style



固定式明装 / Fixed surface




可调式明装 / Adjustable surface

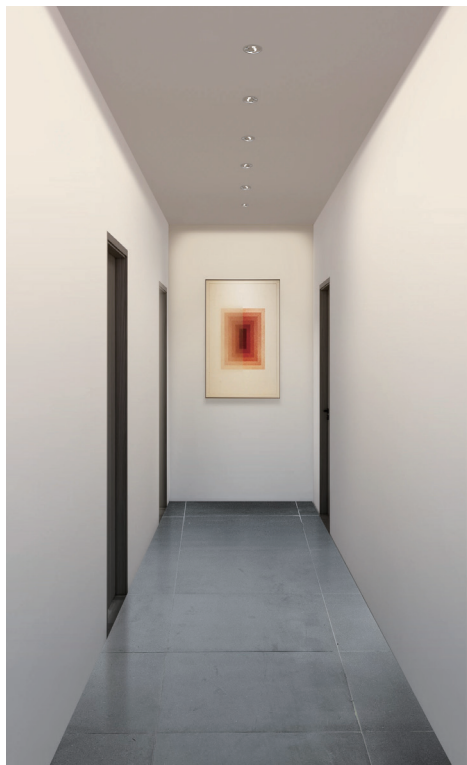

走道 / Walkway



KA 连锁展示 / KA Chain Store

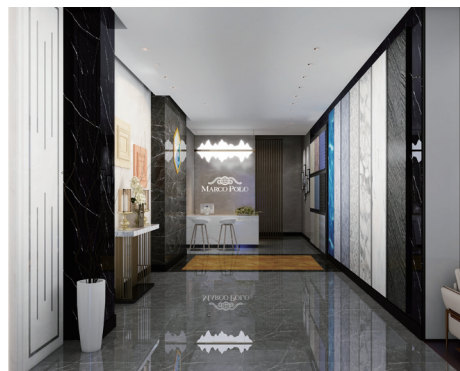

瓷砖店 / Ceramic tile store



博物馆 / Museum



L05311


功率 /Power: 8W

开孔 /Cutout: Ø55mm

尺寸 /Size(WxH): Ø61X84mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



NEW



L05312


功率 /Power: 13.5W

开孔 /Cutout: Ø75mm

尺寸 /Size(WxH): Ø80X84mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05313


功率 /Power: 26W

开孔 /Cutout: Ø95mm

尺寸 /Size(WxH): Ø105X116mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



反射罩 /Reflector cover:



NEW



L05314

定制款




功率 /Power: 8W

开孔 /Cutout: Ø55mm

尺寸 /Size(WxH): 110X84mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05315

定制款




功率 /Power: 13.5W

开孔 /Cutout: Ø75mm

尺寸 /Size(WxH): 133X84mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05316

定制款





功率 /Power: 26W

开孔 /Cutout: Ø95mm

尺寸 /Size(WxH): 160X116mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



反射罩 /Reflector cover:



IP40



L05317






功率 /Power: 13.5W

开孔 /Cutout: Ø55mm

尺寸 /Size(WxH): 93x73x117mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



NEW



L05318




功率 /Power: 26W

开孔 /Cutout: Ø75mm

尺寸 /Size(WxH): 118x94x140mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05319






功率 /Power: 2x26W

开孔 /Cutout: Ø75mm

尺寸 /Size(WxH): 212x118x145mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



反射罩 /Reflector cover:







L05324

定制款

功率 /Power: 2x26W

尺寸 /Size(WxH): 212x118x145mm

光束角 /Beam angle: Wall Washer

 支架 /Standard holder: 16.23  13.9 


NEW





L05320

定制款

功率 /Power: 13.5W

尺寸 /Size(WxH): 93x73x158mm

光束角 /Beam angle: Wall Washer

 支架 /Standard holder: 13.5 



L05321

定制款

功率 /Power: 26W

尺寸 /Size(WxH): 118x94x140mm

光束角 /Beam angle: Wall Washer

 支架 /Standard holder: 16.23  13.9 


反射罩 /Reflector cover:




NEW



L05322

定制款



功率 /Power: 2x13.5W
尺寸 /Size(WxH): 166x93x158mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder:



L05323

定制款



功率 /Power: 2x26W
尺寸 /Size(WxH): 212x118x145mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder:



L05325

定制款

功率 /Power: 13.5W
尺寸 /Size(WxH): 93x73x205mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder:



反射罩 /Reflector cover:





L05326

定制款





功率 /Power: 26W

尺寸 /Size(WxH): 118x94x230mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



NEW



L05327

定制款





功率 /Power: 2x13.5W

尺寸 /Size(WxH): 166x103x208mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05328

定制款





功率 /Power: 2x26W

尺寸 /Size(WxH): 212x127x235mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



反射罩 /Reflector cover:



NEW




L05329

定制款



功率 /Power: 13.5W
尺寸 /Size(WxH): Ø72.5x133mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder: 




L05330

定制款



功率 /Power: 26W
尺寸 /Size(WxH): Ø92.5x158mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder: 



反射罩 /Reflector cover:

