



Stella 斯泰拉系列



- 355°水平旋转 +30°无极调节，便捷调节功能。
- 家族化设计 - 全系列射灯、不同需求不同选择，面环可选用多种风格。
- 提供六种光学结构：可调常规 / 可调黑洞款 / 可调珠嘴款 / 可调泛光款 / 可调反光杯款 / 可调焦款。
- 适合于高端酒店、别墅会所、高端住宅，为您的商务生活提供一个更舒适健康的照明空间。
- 反射罩 6 色可选、满足不同场合需求。

- Positioning groove 355 ° horizontal rotation+Stepless regulation 0~30°at any angle,Convenient adjustment.
- Family design - full range of spotlights, different needs and different choices, face rings can choose a variety of styles.
- Provide five kinds of Optical form:Original Type / BlackHole Type / Shout Type / Acrylic Type / Reflector Cup Type.
- Suitable for high-end hotels, villas clubs, high-end residential, for your business life to provide a more comfortable and healthy lighting space.
- Reflector cover 6 colors are optional to meet the needs of different occasions.




酷感时髦亮色 搭配都市美学

Cool and fashionable bright colors Matching urban aesthetics,


天花板也可以是一种视觉艺术

Ceiling can also be a visual art

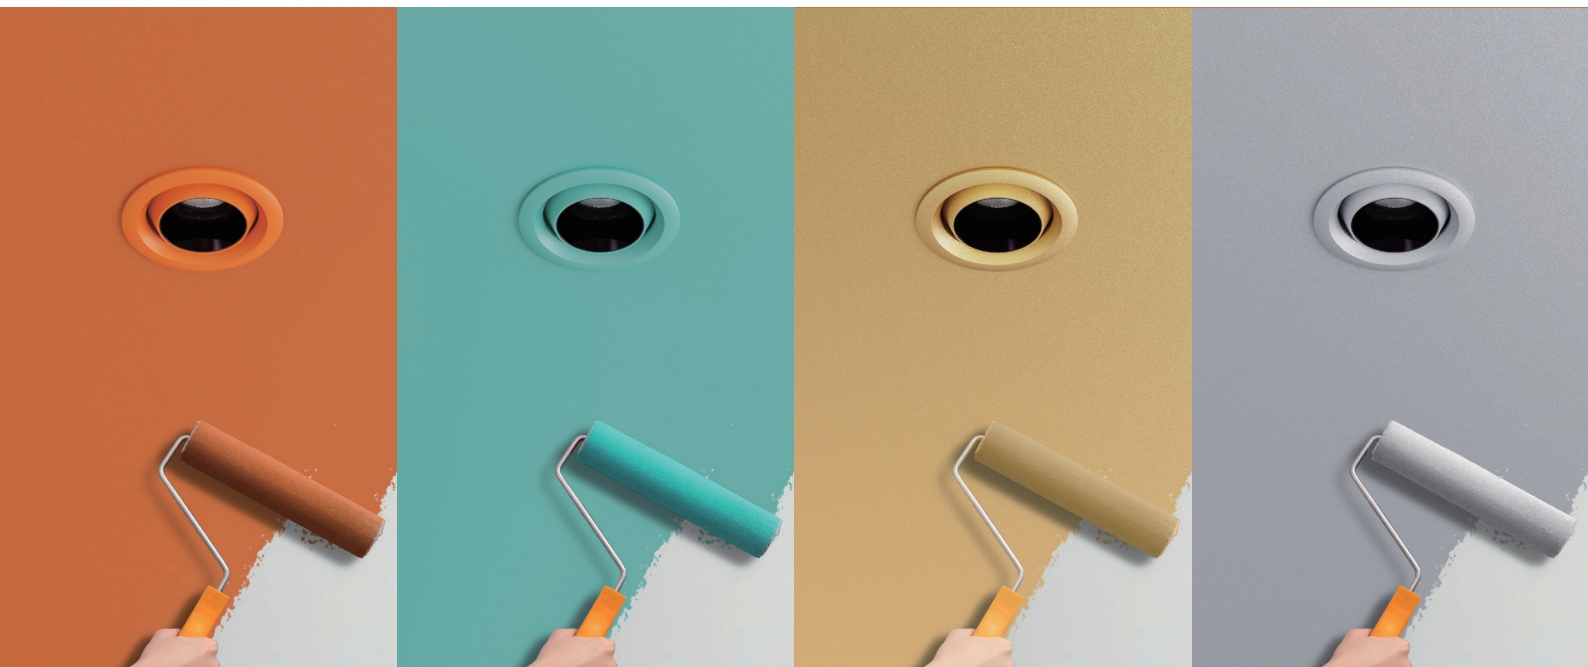

家族化设计

Family design

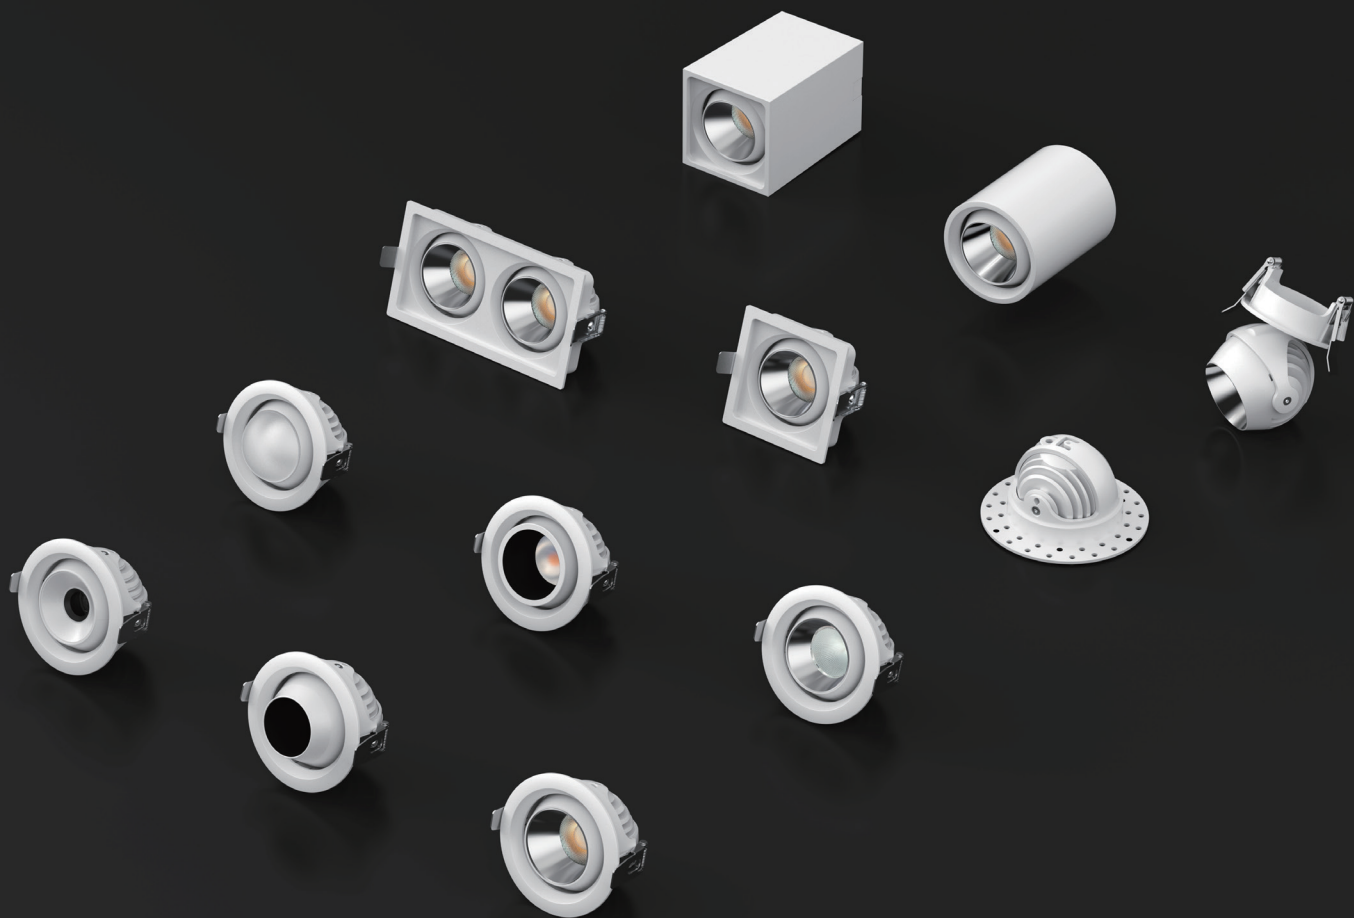

Stella 斯泰拉系列



常规款 / 反光杯款
Lens/Reflector



黑洞款
Black Hole Type



珠嘴款
Snout Type



单头方形款
Single headed Square Type



泛光款
Acrylic Type



可调焦点
Zoomable



一体无边款
Trimless Type



双头方形款
Double headed Square Type



嵌入式 / Embedded Type

斯泰拉系列以精致轮廓设计

Stella series is designed with exquisite contour

- ① 可实现 355°旋转
355° rotation can be achieved
- ② 30 度摆角
30 degree swing angle
- ③ 11 种形态可选
11 forms available
- ④ 配备 6 种光学方案
Equipped with 6 optical schemes
- ⑤ 可制作 IP54 防水等级防潮湿
IP54 can be made
- ⑥ 伴随灵活移动性与便捷调节功能
With flexible mobility and convenient adjustment function
- ⑦ 契合多种场景需求
Meet the needs of multiple scenarios





明装圆形 / Surface Round Type



明装方形 / Surface Square Type

产品结构 Product structure

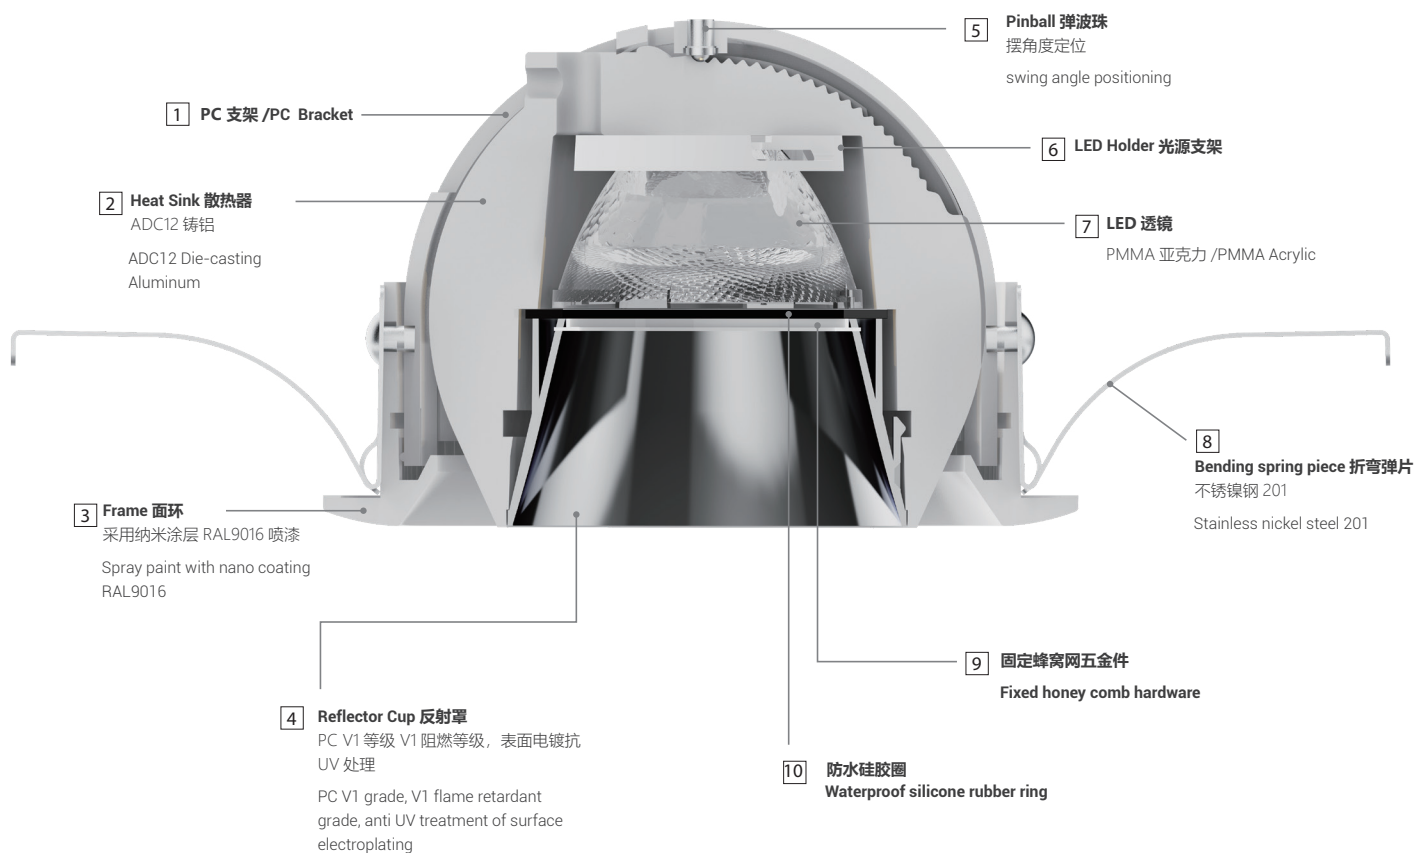

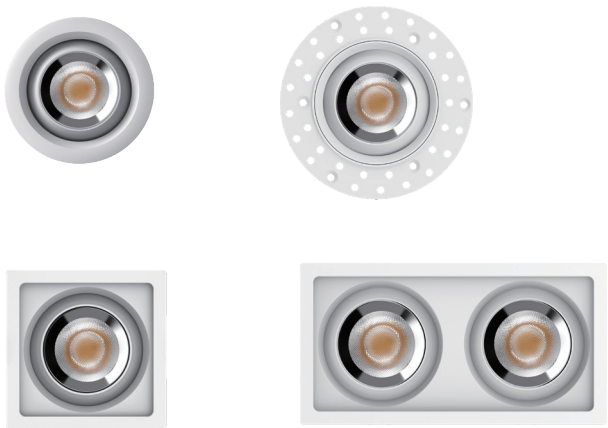

四种面环可选

4 kinds of frame can be selected

四种面环可选：圆形、一体无边、方形单头、方形双头

Four kinds of frame can be selected: round, integral trimless, square single head, square double head

光学透镜 & 反光杯可切换

Optical lens and reflector can be switched



透镜款 /Lens



反光杯款 /Reflector



五种开孔尺寸可选

5 hole sizes available

开孔尺寸有：Φ55、65、75、95、120，适应大小不同功率瓦数。
Hole size:Φ55,65,75,95,120,Suitable for different power wattage.



6 色可选 无惧风格搭配

Reflectors in different color

反射罩经过精密设计、采用电镀（抗 UV）以及纳米喷漆技术，适用不同软装装饰环境



The reflector is precisely designed with electroplating (anti UV) and nano paint technology, which is suitable for different soft decoration environments

波珠定义 成就焦点

Definition of pinball Achievement focus

金属波珠，摆角时，波珠随齿轮滚动而实现上下弹动，弹出至锯齿凹点时，紧固散热器，防止松动。

Metal pinball, when swinging angle, the pinball moves up and down with the gear rolling When popping up to the serrated concave point, fasten the radiator to prevent looseness




极窄设计

Extremely narrow edge design



面环高度
/Frame height:1.5mm



8mm 极窄边
8mm Super Narrow Edge




**便捷调节功能
可向各个角度旋转**

实用主义, 细节别出新裁

Convenient adjustment,
Can be rotated to all angles, Pragmatism, ingenious details.

0~30°

无极调节 0~30°任意角度
Stepless regulation 0~30°at any angle

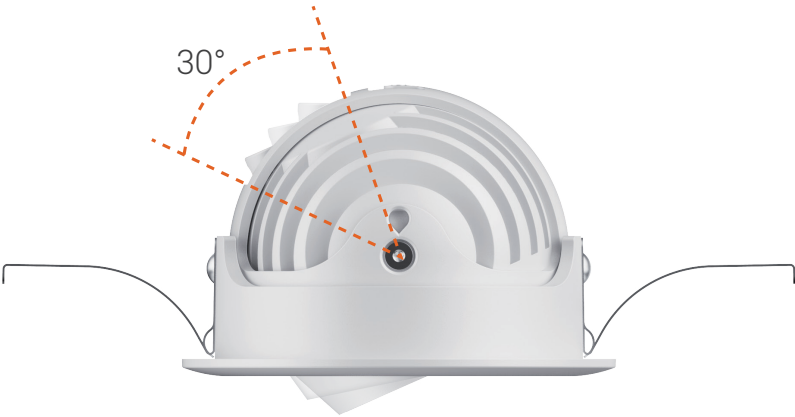

355°



尼阻 /Damping 定位齿轮
Positioning gear

定位凹槽 ,355°水平旋转

Positioning groove,355 °horizontal rotation


水平旋转 355°，内有定位点、尼阻起到防呆作用

Horizontal rotation of 355 °,
with positioning point and damping to Fool-proof

6 种光学形态



常规款 /Original Type

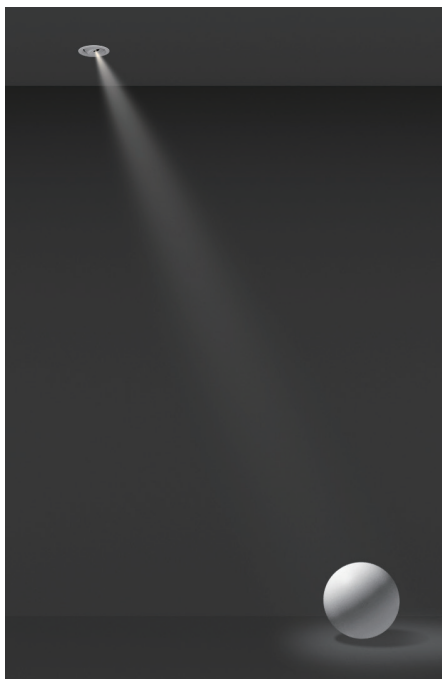

黑洞款 /BlackHole Type



珠嘴款 /Snout Type



UGR<13

光束角 :10°/15°/24°/36°/50°




UGR<9

光束角 :24°/36°




UGR<9


光束角 :10°/15°/ 24° /36° /50°

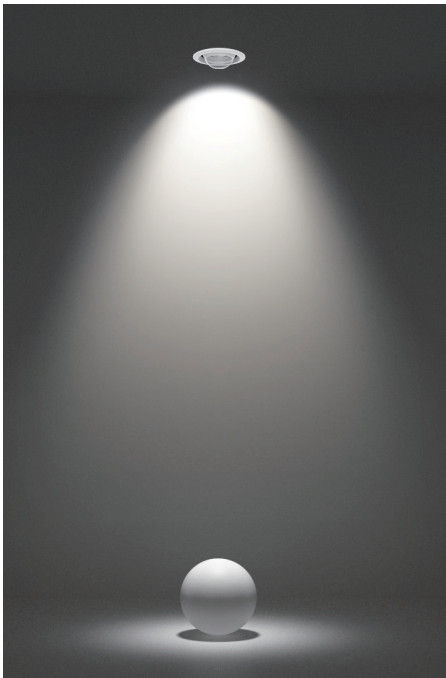

泛光款 /Acrylic Type

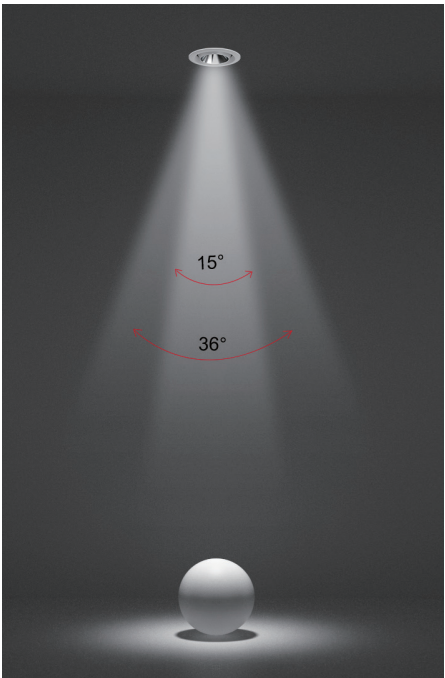

调焦款 /Focusing Type

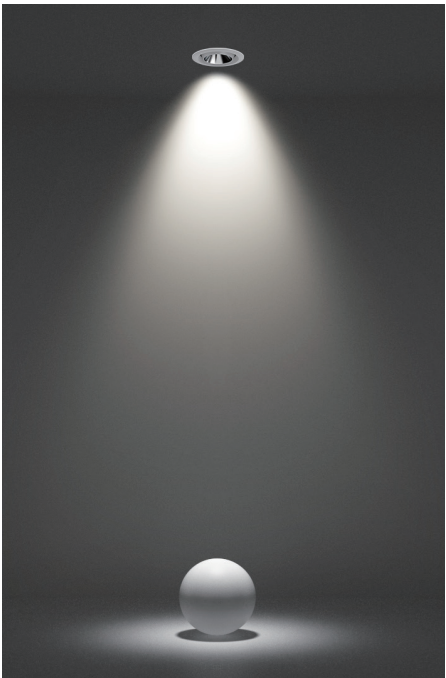

反光杯款 /Reflector Type



泛光基础款
光束角 :120°



UGR<9
光束角 :15°~36°





UGR<13
光束角 :18°/24°/38°

深度防眩光

Deep Anti-Glare

正常人在空间活动平视为 30 度，因此射灯的防眩光遮蔽应大于 30 度以上才能有效防眩光。

In general, the horizontal view of human activities in space is 30 degrees, so the anti glare shielding of spotlights should be more than 30 degrees to effectively prevent glare.

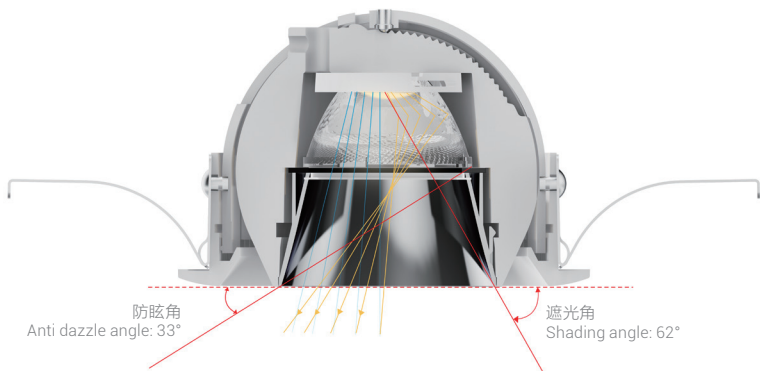



光学配件 按需变换

Optical Fitting On demand transformation

四款光学配件可选，可实现光斑形状，整灯 UGR 等技术参数的变化满足不同场景的照明需求

Four optical Fitting are optional, which can realize the change of spot shape, full lamp UGR and other technical parameters to meet the lighting needs of different scenes.

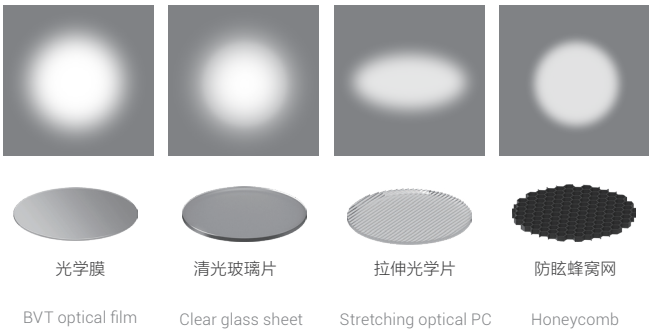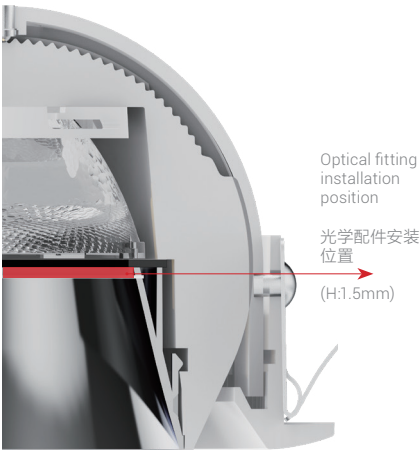

PMMA 高出光率 棱纹结构透镜

PMMA high luminous rate Ribbed structure lens



采用棱纹结构设计，自带防眩效果，让光线交织在反射罩上端的中心点处，有效减少杂光，光斑过渡均匀，更柔和舒适均匀。

Adopting a ribbed structure design, with built-in anti glare effect, transparent luster, strong penetration, high effective illumination rate, precise visual beam angle, and high light source color gamut restoration.



透镜光斑效果

Lens light spot effect:

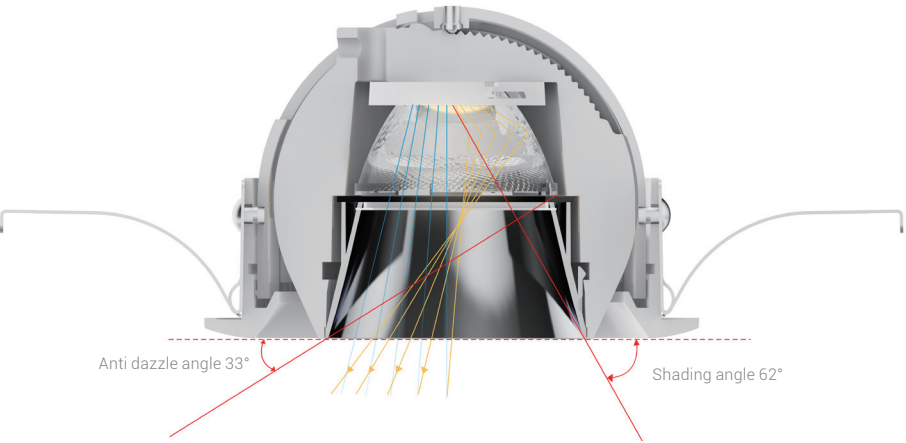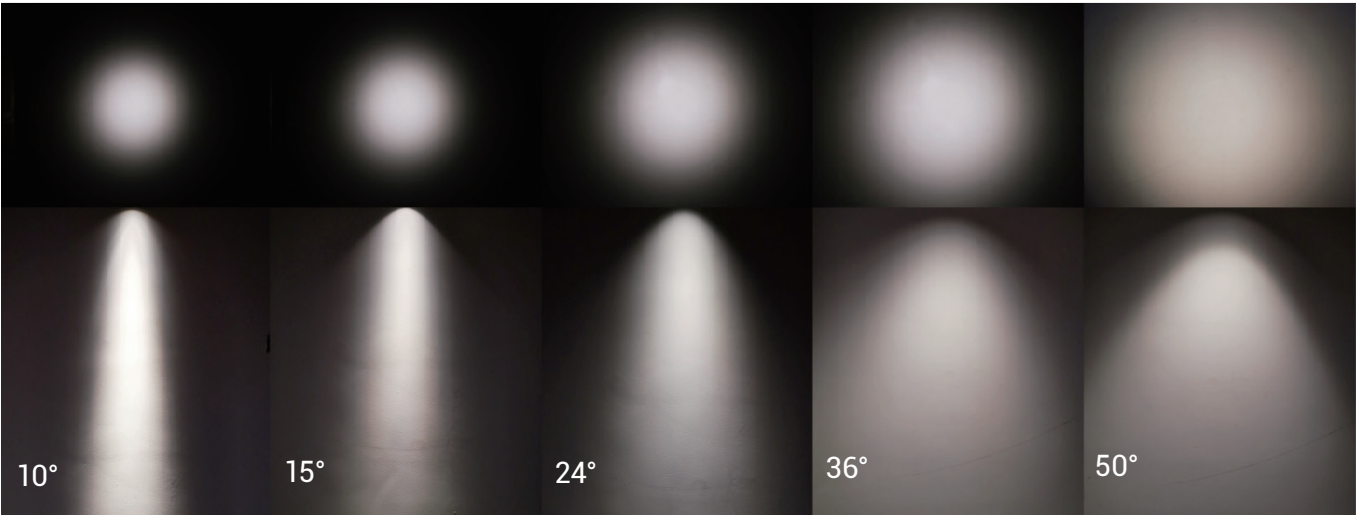

NEW




● 嵌入式 - 透镜款
Embedded - Lens

罩子颜色 :
Colour

金色 Gold 亮银 Chorm 哑黑 Black 哑白 White 哑银 Silver 枪黑 Pearl black

选配 :
Optional

蜂窝网 Honey comb

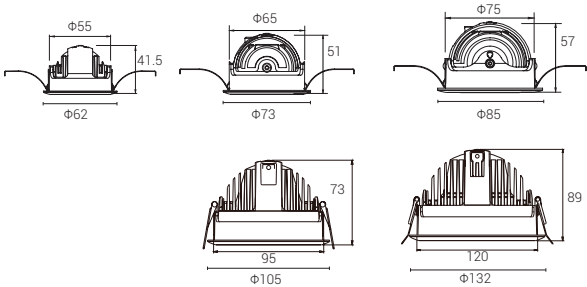

型号 /Model Code	L05001	L05002	L05003	L05004	L05005
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ55mm	Φ65mm	Φ75mm	Φ95mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ62x41.5mm	Φ73x51mm	Φ85x57mm	Φ105x73mm	Φ132x89mm


眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44

NEW



● 嵌入式 - 泛光款
Embedded - Acrylic Type

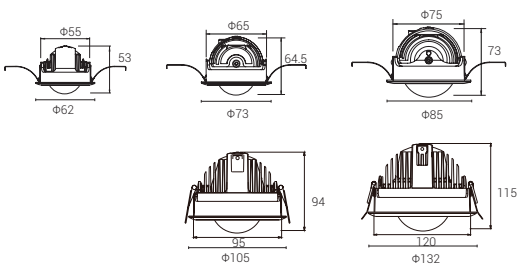


型号 /Model Code	L05006	L05007	L05008	L05009	L05010
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ55mm	Φ65mm	Φ75mm	Φ95mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ62x53mm	Φ73x64.5mm	Φ85x73mm	Φ105x94mm	Φ132x115mm
眩光值 /UGR	-	-	-	-	-
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	120°	120°	120°	120°	120°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: Cutout of 55, 65, 95 and 120 are all custom-made.

NEW



● 嵌入式 - 黑洞款
Embedded - Black Hole Type

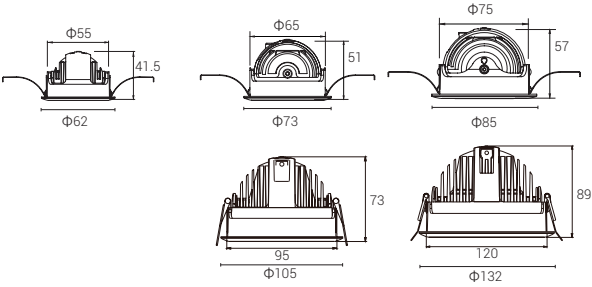


型号 /Model Code	L05011	L05012	L05013	L05014	L05015
功率 /Power	5W	7W	9W	15W	25W
开孔 /Cut out	Φ55mm	Φ65mm	Φ75mm	Φ95mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ62x41.5mm	Φ73x51mm	Φ85x57mm	Φ105x73mm	Φ132x89mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	24°/36°	24°/36°	24°/36°	24°/36°	24°/36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: Cutout of 55, 65, 95 and 120 are all custom-made.

NEW



- 嵌入式 - 珠嘴款
Embedded - Snout Type

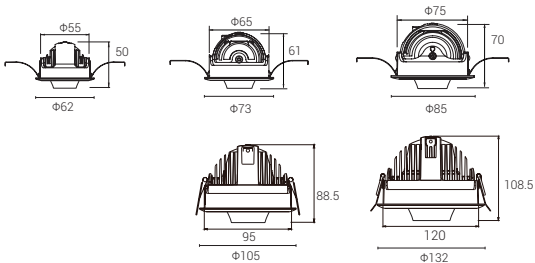

XQ-1001E55-ZY-LENS / XQ-1001E65-ZY-LENS / XQ-1001E75-ZY-LENS / XQ-1001E95-ZY-LENS / XQ-1001E120-ZY-LENS


型号 /Model Code	L05016	L05017	L05018	L05019	L05020
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ55mm	Φ65mm	Φ75mm	Φ95mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ63x50mm	Φ73x61mm	Φ85x70mm	Φ105x88.5mm	Φ132x108.5mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: Cutout of 55, 65, 95 and 120 are all custom-made.

NEW



● 嵌入式 - 变焦款
Embedded - Focusing Type

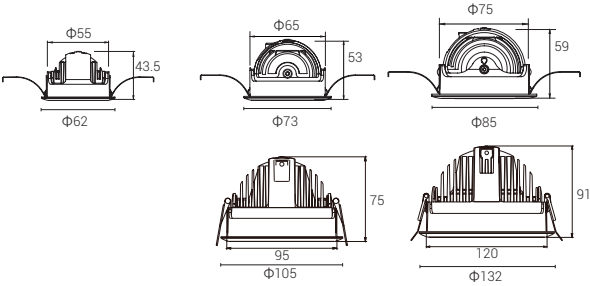

型号 /Model Code	L05021	L05022	L05023	L05024	L05025
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ55mm	Φ65mm	Φ75mm	Φ95mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ62x43.5mm	Φ73x53mm	Φ85x59mm	Φ105x75mm	Φ132x91mm

眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15~36°	15~36°	15~36°	15~36°	15~36°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: Cutout of 55, 65, 95 and 120 are all custom-made.

NEW



● 一体无边 - 透镜款
Trimless - Lens

罩子颜色：
Colour



金色
Gold



亮银
Chorm



哑黑
Black



哑白
White



哑银
Silver




枪黑
Pearl black

选配：
Optional



蜂窝网
Honey comb

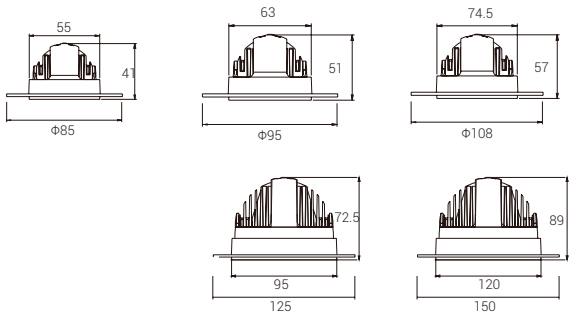


型号 /Model Code	L05026	L05027	L05028	L05029	L05030
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ55mm	Φ65mm	Φ75mm	Φ95mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ85x41mm	Φ95x51mm	Φ108x57mm	Φ125x72.5mm	Φ150x89mm
眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44

注：55、65、95、120 属于定制款
Note: Cutout of 55, 65, 95 and 120 are all custom-made.

NEW




● 一体无边 - 珠嘴款
Trimless - Snout Type

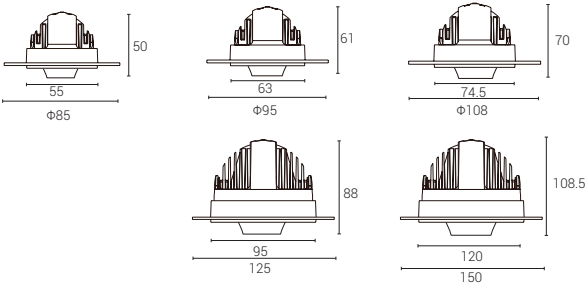

型号 /Model Code	L05031	L05032	L05033	L05034	L05035
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ55mm	Φ65mm	Φ75mm	Φ95mm	Φ120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ85x50mm	Φ95x61mm	Φ108x70mm	Φ125x88mm	Φ150x108.5mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: Cutout of 55, 65, 95 and 120 are all custom-made.

NEW

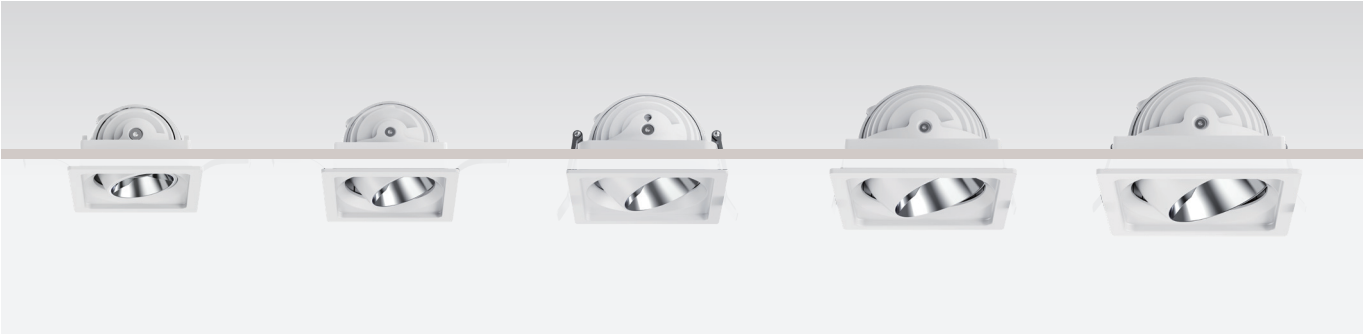


• 方形单头 - 透镜款
Single headed Square - Lens

罩子颜色 :
Colour

金色 Gold
亮银 Chorm
哑黑 Black
哑白 White
哑银 Silver
枪黑 Pearl black

选配 :
Optional

蜂窝网
Honey comb

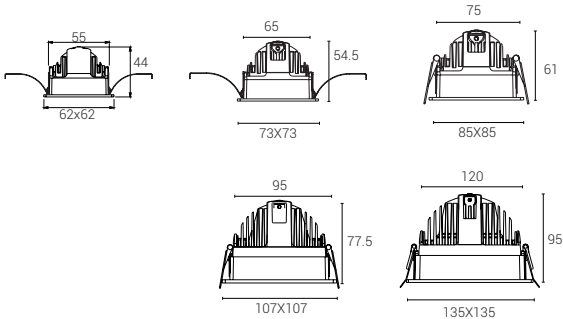

型号 /Model Code	L05036	L05037	L05038	L05039	L05040
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	55x55mm	65x65mm	75x75mm	95x95mm	120x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	62X62X44mm	73X73X54.5mm	85X85X61mm	107X107X77.5mm	135X135X95mm

眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 方形单头 - 反光杯款


Single headed Square - Reflector

罩子颜色 :
Colour

金色 Gold 亮银 Chorm 哑黑 Black 哑白 White 哑银 Silver 枪黑 Pearl black

选配 :
Optional

蜂窝网 Honey comb

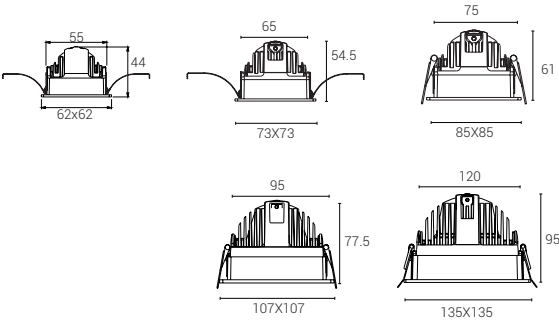


型号 /Model Code	L05041	L05042	L05043	L05044	L05045
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	55x55mm	65x65mm	75x75mm	95x95mm	120x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	62X62x44mm	73X73X54.5mm	85X85X61mm	107X107X77.5mm	135X135X95mm

眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	18° / 24° / 38°	18° / 24° / 38°	18° / 24° / 38°	18° / 24° / 38°	18° / 24° / 38°


色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW

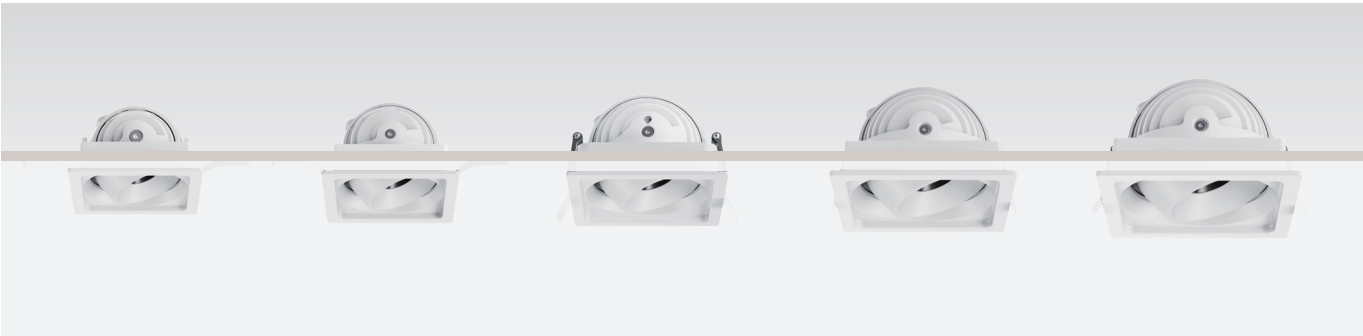


• 方形单头 - 黑洞款
Single headed Square - Black Hole Type

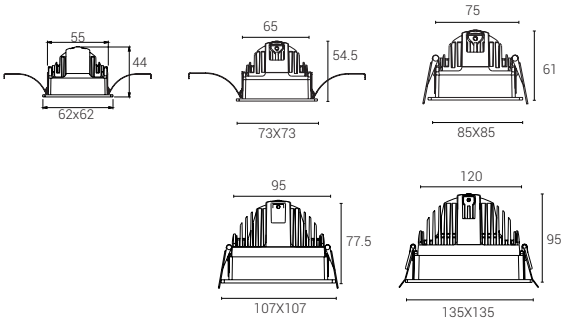


型号 /Model Code	L05046	L05047	L05048	L05049	L05050
功率 /Power	5W	7W	9W	15W	25W
开孔 /Cut out	55x55mm	65x65mm	75x75mm	95x95mm	120x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	62x62x44mm	73x73x54.5mm	85x85x61mm	107x107x77.5mm	135x135x95mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	24°/36°	24°/36°	24°/36°	24°/36°	24°/36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW

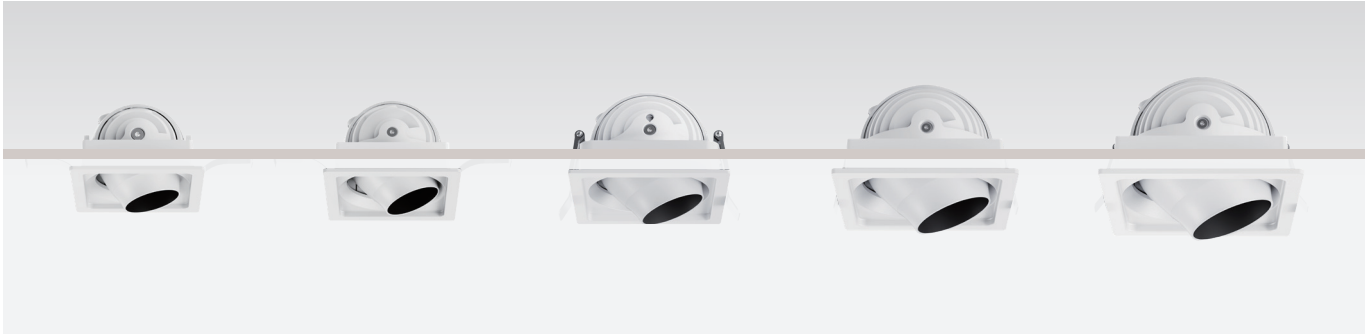


• 方形单头 - 珠嘴款
Single headed Square - Snout Type

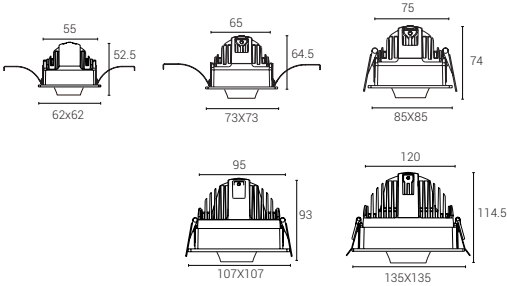


型号 /Model Code	L05051	L05052	L05053	L05054	L05055
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	55x55mm	65x65mm	75x75mm	95x95mm	120x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	62x62x52.5mm	73x73x64.5mm	85x85x74mm	107x107x93mm	135x135x114.5mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW

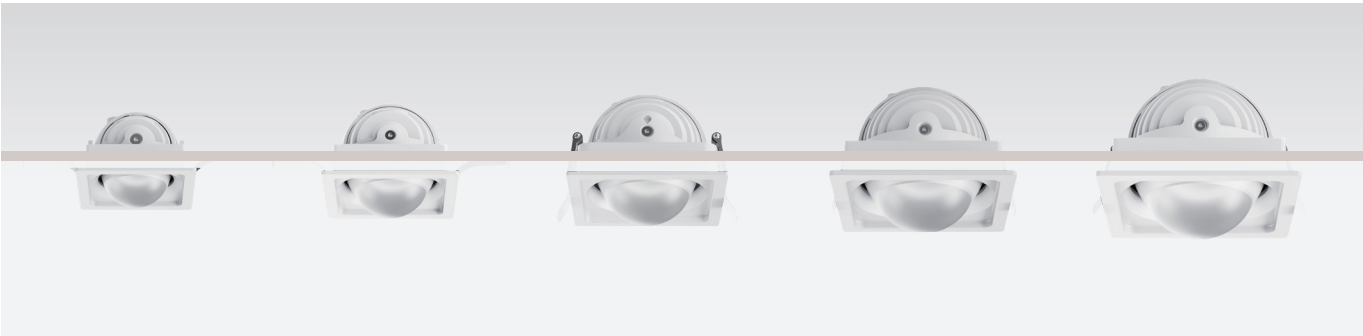


• 方形单头 - 泛光款
Single headed Square - Acrylic Type

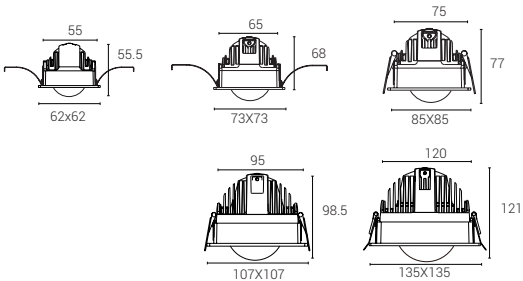


型号 /Model Code	L05056	L05057	L05058	L05059	L05060
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	55x55mm	65x65mm	75x75mm	95x95mm	120x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	62x62x55.5mm	73x73x68mm	85x85x77mm	107x107x98.5mm	135x135x121mm
眩光值 /UGR	-	-	-	-	-
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	120°	120°	120°	120°	120°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW

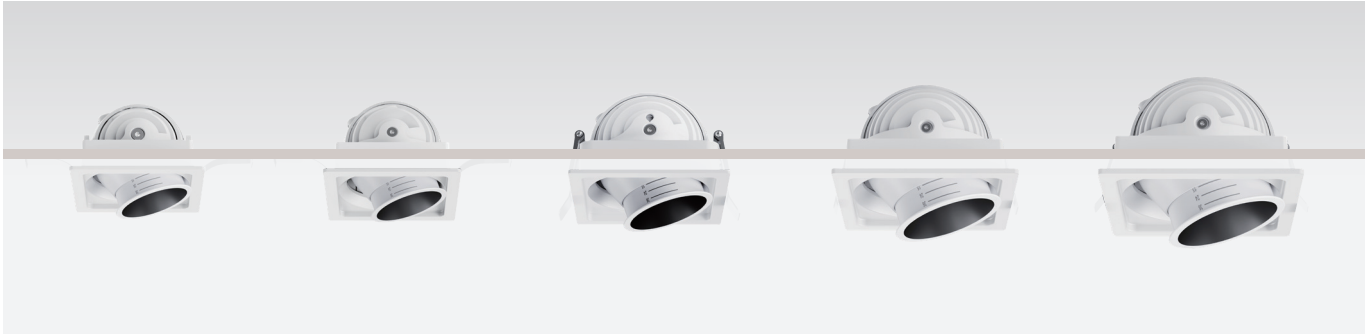

• 方形单头 - 变焦款
Single headed Square-Focusing Type

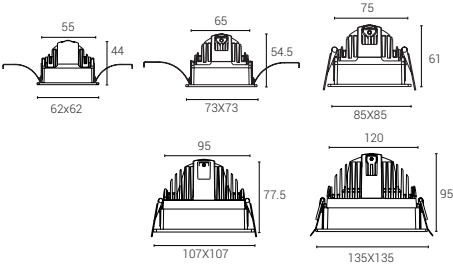

型号 /Model Code	L05061	L05062	L05063	L05064	L05065
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	55x55mm	65x65mm	75x75mm	95x95mm	120x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	62x62x44mm	73x73x54.5mm	85x85x61mm	107x107x77.5mm	135x135x95mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15~36°	15~36°	15~36°	15~36°	15~36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 方形双头 - 透镜款

Double headed Square - LENS

罩子颜色：
Colour



金色
Gold



亮银
Chorm



哑黑
Black



哑白
White



哑银
Silver








枪黑
Pearl black

选配：
Optional



蜂窝网
Honey comb



型号 /Model Code	L05066	L05067	L05068	L05069	L05070
功率 /Power	2x6W	2x8W	2x12W	2x18W	2x28W
开孔 /Cut out	110x55mm	130x65mm	150x75mm	190x95mm	240x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	117x62x44mm	138x72x54.5mm	160x85x61mm	202x107x77.5mm	255x135x95mm

眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 方形双头 - 反光杯款

Double headed Square - Reflector

罩子颜色：
Colour



金色
Gold



亮银
Chorm



哑黑
Black



哑白
White



哑银
Silver








枪黑
Pearl black

选配：
Optional



蜂窝网
Honey comb



型号 /Model Code	L05071	L05072	L05073	L05074	L05075
功率 /Power	2x6W	2x8W	2x12W	2x18W	2x28W
开孔 /Cut out	110x55mm	130x65mm	150x75mm	190x95mm	240x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	117x62x44mm	138x72x54.5mm	160x85x61mm	202x107x77.5mm	255x135x95mm

眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	18°/ 24°/ 38°	18°/ 24°/ 38°	18°/ 24°/ 38°	18°/ 24°/ 38°	18°/ 24°/ 38°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20


注：55、65、95、120 属于定制款

Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 方形双头 - 黑洞款
Double headed Square - Black Hole Type

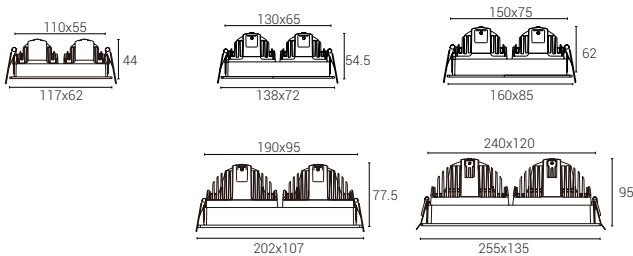


型号 /Model Code	L05076	L05077	L05078	L05079	L05080
功率 /Power	2x5W	2x7W	2x9W	2x15W	2x25W
开孔 /Cut out	110x55mm	130x65mm	150x75mm	190x95mm	240x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	117x62x44mm	138x72x54.5mm	160x85x62mm	202x107x77.5mm	255x135x95mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	24°/36°	24°/36°	24°/36°	24°/36°	24°/36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 方形双头 - 珠嘴款
Double headed Square - Snout Type

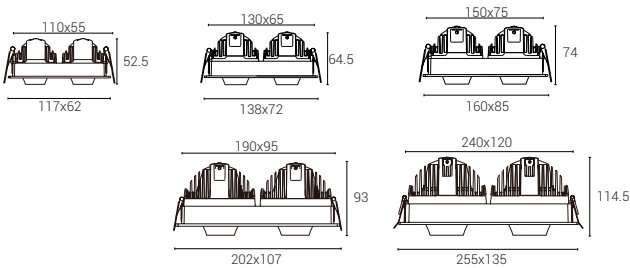


型号 /Model Code	L05081	L05082	L05083	L05084	L05085
功率 /Power	2x6W	2x8W	2x12W	2x18W	2x28W
开孔 /Cut out	110x55mm	130x65mm	150x75mm	190x95mm	240x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	117x62x52.5mm	138x72x64.5mm	160x85x74mm	202x107x93mm	255x135x114.5mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°	10°/15°/24°/36°/50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 方形双头 - 泛光款
Double headed Square-Acrylic Type

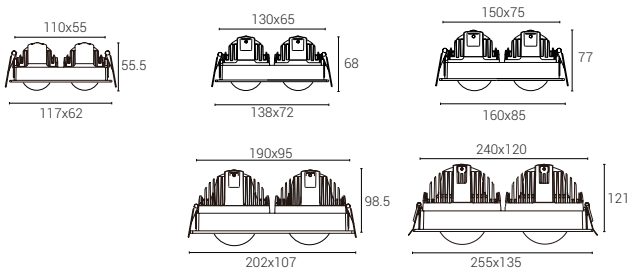


型号 /Model Code	L05086	L05087	L05088	L05089	L05090
功率 /Power	2x6W	2x8W	2x12W	2x18W	2x28W
开孔 /Cut out	110x55mm	130x65mm	150x75mm	192x95mm	240x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	117x62x55.5mm	138x72x68mm	160x85x77mm	202x107x98.5mm	255x135x121mm
眩光值 /UGR	-	-	-	-	-
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	120°	120°	120°	120°	120°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 方形双头 - 变焦款
Double headed Square-Focusing Type

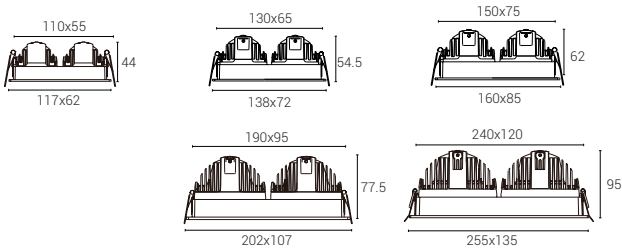


型号 /Model Code	L05091	L05092	L05093	L05094	L05095
功率 /Power	2x6W	2x8W	2x12W	2x18W	2x28W
开孔 /Cut out	110x55mm	130x65mm	150x75mm	192x95mm	240x120mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	117x62x44mm	138x73x54.5mm	160x85x61mm	202x107x77.5mm	255x135x95mm

眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15~36°	15~36°	15~36°	15~36°	15~36°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW

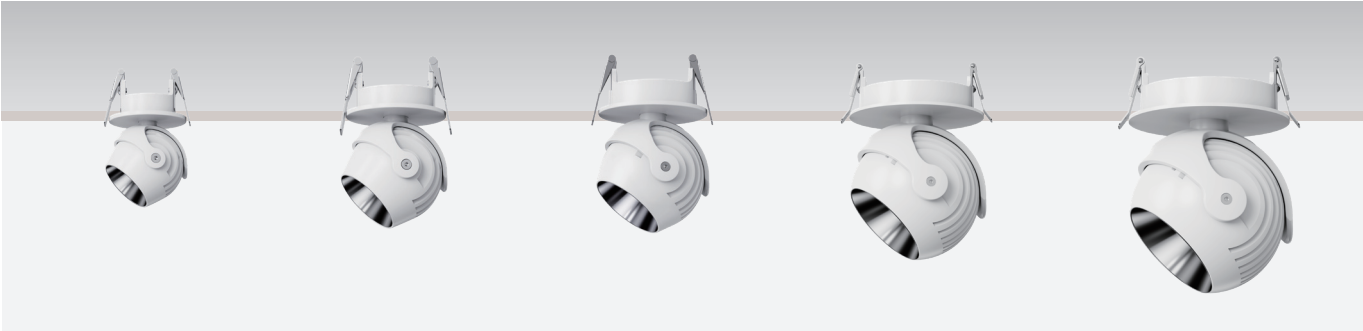

● 外露嵌入式 - 透镜款

Pendant embedded - LENS

罩子颜色 :
Colour


金色
Gold


亮银
Chorm


哑黑
Black



哑白
White


哑银
Silver


枪黑
Pearl black

选配 :
Optional


蜂窝网
Honey comb

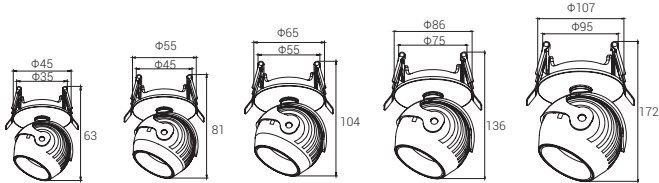

型号 /Model Code	L05096	L05067	L05098	L05099	L05100
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ35mm	Φ45mm	Φ55mm	Φ75mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ45x63mm	Φ55x81mm	Φ65x104mm	Φ86x136mm	Φ107x172mm
眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 外露嵌入式 - 反光杯款


Pendant embedded - Reflector

罩子颜色 :
Colour

金色 Gold
亮银 Chorm
哑黑 Black
哑白 White
哑银 Silver
枪黑 Pearl black

选配 :
Optional

蜂窝网
Honey comb

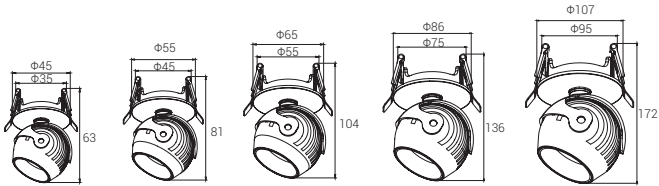


型号 /Model Code	L05101	L05102	L05103	L05104	L05105
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ35mm	Φ45mm	Φ55mm	Φ75mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ45x63mm	Φ55x81mm	Φ65x104mm	Φ86x136mm	Φ107x172mm

眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	18°/ 24°/ 38°	18°/ 24°/ 38°	18°/ 24°/ 38°	18°/ 24°/ 38°	18°/ 24°/ 38°


色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW

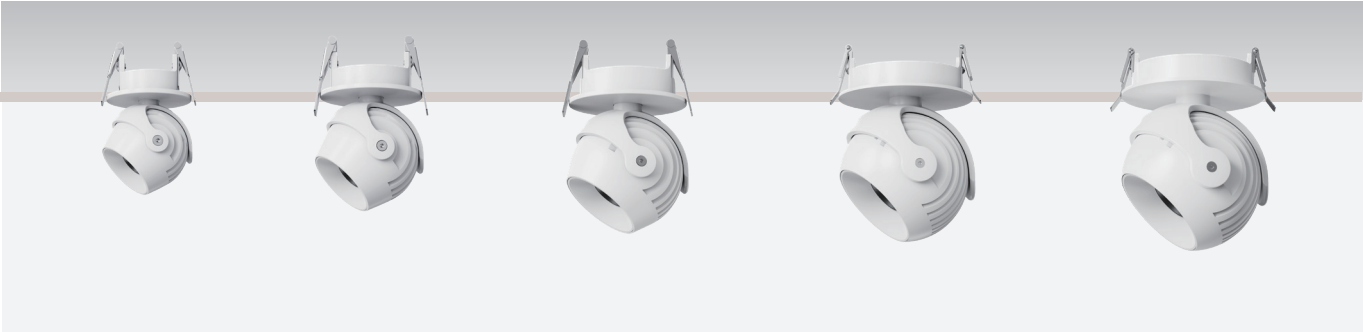

● 外露嵌入式 - 黑洞款
Pendant embedded - Black Hole Type

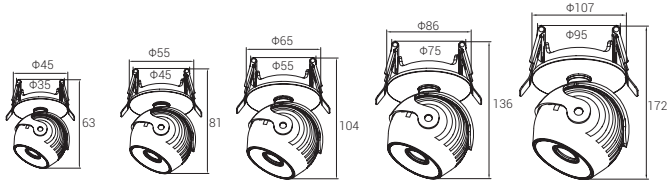


型号 /Model Code	L05106	L05107	L05108	L05109	L05110
功率 /Power	5W	7W	9W	15W	25W
开孔 /Cut out	Φ35mm	Φ45mm	Φ55mm	Φ75mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ45x63mm	Φ55x81mm	Φ65x104mm	Φ86x136mm	Φ107x172mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	24°/36°	24°/36°	24°/36°	24°/36°	24°/36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW




● 外露嵌入式 - 珠嘴款
Pendant embedded-Snout Type

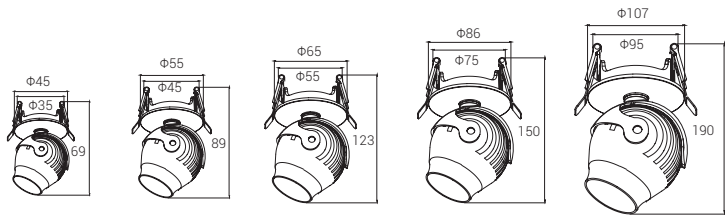


型号 /Model Code	L05111	L05112	L05113	L05114	L05115
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ35mm	Φ45mm	Φ55mm	Φ75mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ45x69mm	Φ55x89mm	Φ65x123mm	Φ86x150mm	Φ107x190mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW

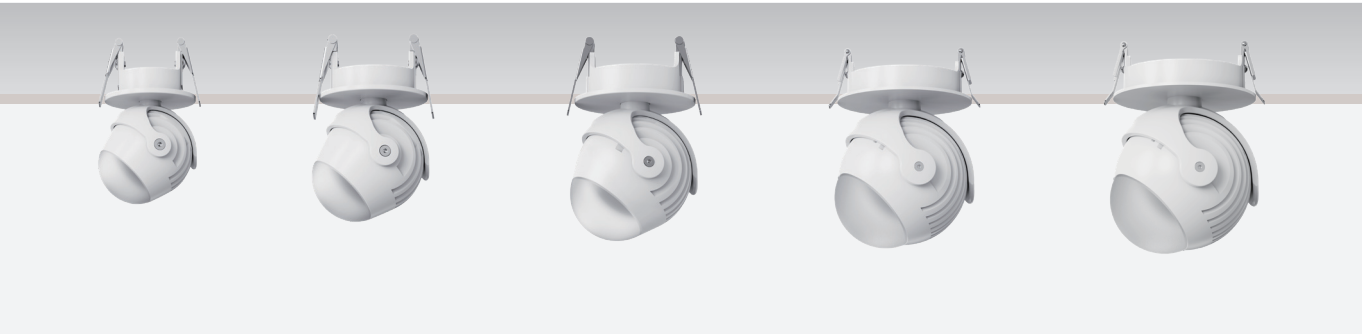

● 外露嵌入式 - 泛光款
Pendant embedded-Acrylic Type

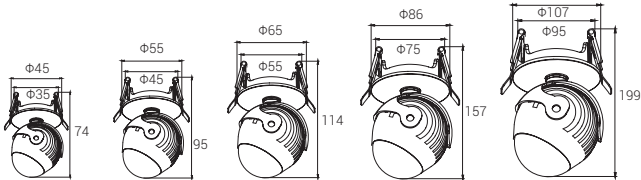

型号 /Model Code	L05116	L05117	L05118	L05119	L05120
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ35mm	Φ45mm	Φ55mm	Φ75mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ45x74mm	Φ55x95mm	Φ65x114mm	Φ86x157mm	Φ107x199mm
眩光值 /UGR	-	-	-	-	-
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	120°	120°	120°	120°	120°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20


注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



● 外露嵌入式 - 变焦款

Pendant embedded-Focusing Type

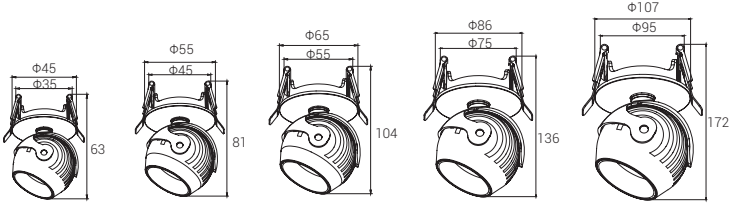

型号 /Model Code	L05121	L05122	L05123	L05124	L05125
功率 /Power	6W	8W	12W	18W	28W
开孔 /Cut out	Φ35mm	Φ45mm	Φ55mm	Φ75mm	Φ95mm
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ45x63mm	Φ55x81mm	Φ65x104mm	Φ86x136mm	Φ107x172mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15~36°	15~36°	15~36°	15~36°	15~36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.



NEW


● 圆形明装 - 透镜款

Round-Surface-Lens

罩子颜色：
Colour



选配：
Optional

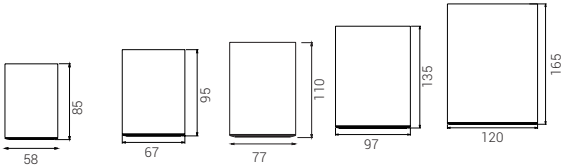


型号 /Model Code	L05126	L05127	L05128	L05129	L05130
功率 /Power	6W	8W	12W	18W	28W
安装方式/Installation	明装	明装	明装	明装	明装
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ58x85mm	Φ67x95mm	Φ77x110mm	Φ97x135mm	Φ120x165mm
眩光值 /UGR	<13	<13	<13	<13	<13
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44	IP20/IP44

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



● 圆形明装 - 黑洞款
Round-Surface-Black Hole Type

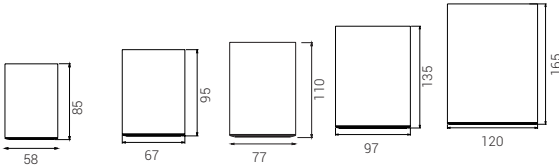


型号 /Model Code	L05131	L05132	L05133	L05134	L05135
功率 /Power	5W	7W	9W	15W	25W
安装方式/Installation	明装	明装	明装	明装	明装
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ58x85mm	Φ67x95mm	Φ77x110mm	Φ97x135mm	Φ120x165mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	24° / 36°	24° / 36°	24° / 36°	24° / 36°	24° / 36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



● 圆形明装 - 珠嘴款
Round-Surface-Snout Type

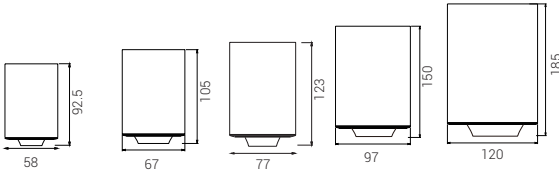


型号 /Model Code	L05136	L05137	L05138	L05139	L05140
功率 /Power	6W	8W	12W	18W	28W
安装方式/Installation	明装	明装	明装	明装	明装
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ58x85mm	Φ67x92.5mm	Φ77x123mm	Φ97x150mm	Φ120x185mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°	10°/15°/ 24°/ 36°/ 50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



● 圆形明装 - 泛光款
Round-Surface-Acrylic Type

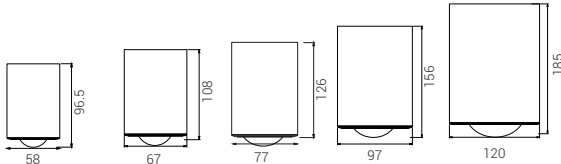


型号 /Model Code	L05141	L05142	L05143	L05144	L05145
功率 /Power	6W	8W	12W	18W	28W
安装方式/Installation	明装	明装	明装	明装	明装
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ58x96.5mm	Φ67x108mm	Φ77x126mm	Φ97x156mm	Φ120x185mm
眩光值 /UGR	-	-	-	-	-
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	120°	120°	120°	120°	120°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



● 圆形明装 - 变焦款
Round-Surface-Focusing Type

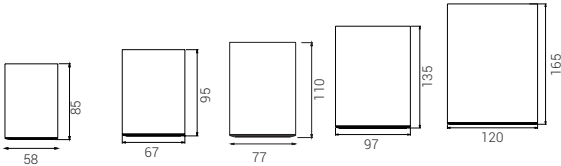

型号 /Model Code	L05146	L05147	L05148	L05149	L05150
功率 /Power	6W	8W	12W	18W	28W
安装方式/Installation	明装	明装	明装	明装	明装
光源 /Light Source	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ58x85mm	Φ67x95mm	Φ77x110mm	Φ97x135mm	Φ120x165mm
眩光值 /UGR	<9	<9	<9	<9	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°~36°	15°~36°	15°~36°	15°~36°	15°~36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20	IP20

注：55、65、95、120 属于定制款
Note: The radiator models of 55, 65, 95 and 120 are all custom-made.

NEW



• 方形明装

Square-Surface

罩子颜色：
Colour



金色
Gold



亮银
Chorm



哑黑
Black



哑白
White



哑银
Silver




枪黑
Pearl black

选配：
Optional



蜂窝网
Honey comb

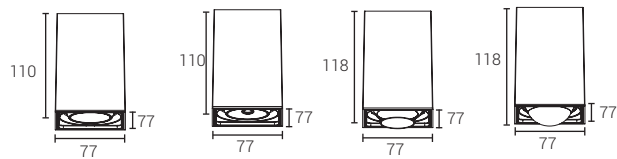

型号 /Model Code	L05151	L05152	L05153	L05154	L05155	L05156
功率 /Power	12W	12W	9W	12W	12W	12W
安装方式/Installation	明装	明装	明装	明装	明装	明装
光源 /Light Source	CREE	CREE	CREE	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ77x110mm	Φ77x110mm	Φ77x110mm	Φ77x118mm	Φ77x118mm	Φ77x110mm

眩光值 /UGR	<13	<13	<9	<9	-	<9
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	10°/15°/ 24°/ 36°/ 50°	18°/ 24°/ 38°	24°/36°	10°/15°/ 24°/ 36°/ 50°	120°	15~36°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20/IP44	IP20	IP20	IP20	IP20	IP20