


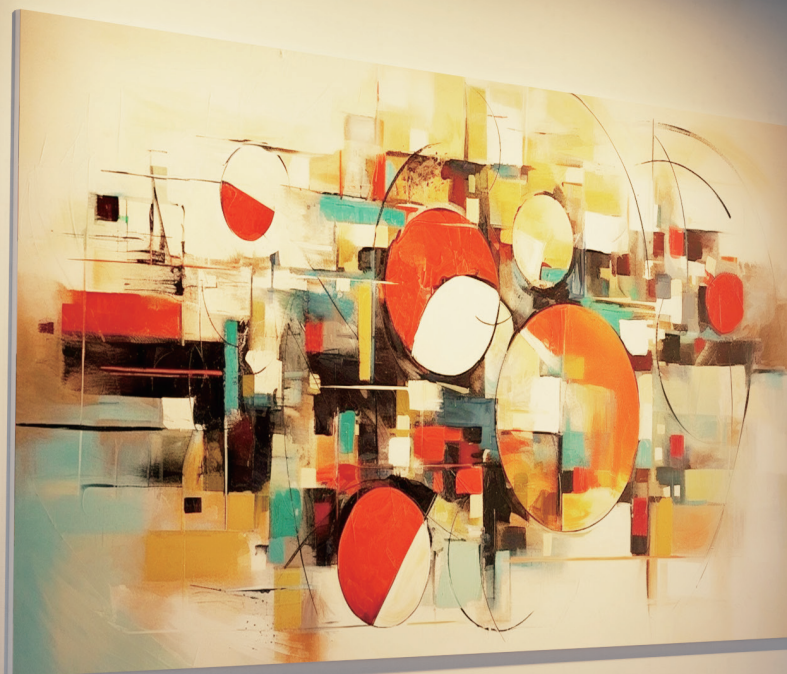


科勒 - 偏光洗墙灯

Koler-Polarized wall washer

科勒系列偏光洗墙灯，防眩光罩采用精确的光线控制，像光幕一样洗出均匀的光斑；嵌入式安装时，发光端与天花板顶部平切。

洗墙光斑的分布比例为 0.8（离墙）：3（高）：0.8（宽）。


Koler series polarized wall washer, anti-glare cover using accurate light control, like a light curtain to wash out uniform light spots; For recessed installation, the luminous end is cut flush with the ceiling top.
The distribution ratio of the wall washing spot is 0.8 (away from the wall) : 3 (high) : 0.8 (wide).

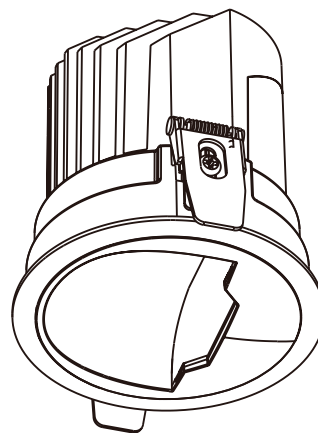

PRODUCT FUNCTION INTRODUCTION 产品功能介绍

科勒 - 偏光洗墙灯

Koler-Polarized wall washer



• 低眩光高光效:

特殊设计自由曲面反光杯加防眩罩，精准光路
主动防眩，出光效率高

Specially designed free-form reflective cup with anti-glare cover, accurate light path, active anti-glare, with higher light efficiency

• 超强混光性能:

独特的微鳞甲格纹，单色和双色温混光都均匀
Super turnable white performance

• 无暗区洗墙光斑:

洗墙起始光斑与天花板顶端切齐
Wall washing with no dark area

• 多盏拼接洗墙佳:

可无缝拼接洗墙，光斑均匀过渡，无亮暗条纹
The splicing of multiple lamps has a better wall washing effect

• 多样尺寸:

天花开孔 55/75/95mm
Ceiling Cutout 55/75/95mm


• 多款颜色:


两款颜色防眩罩可选：镀铬 + 电镀黑
Two color anti-glare covers available: chrome +electroplated black

• 材料更优:

耐高温材料，反光杯耐温 140℃
High temperature resistant material, reflective cup temperature 140℃



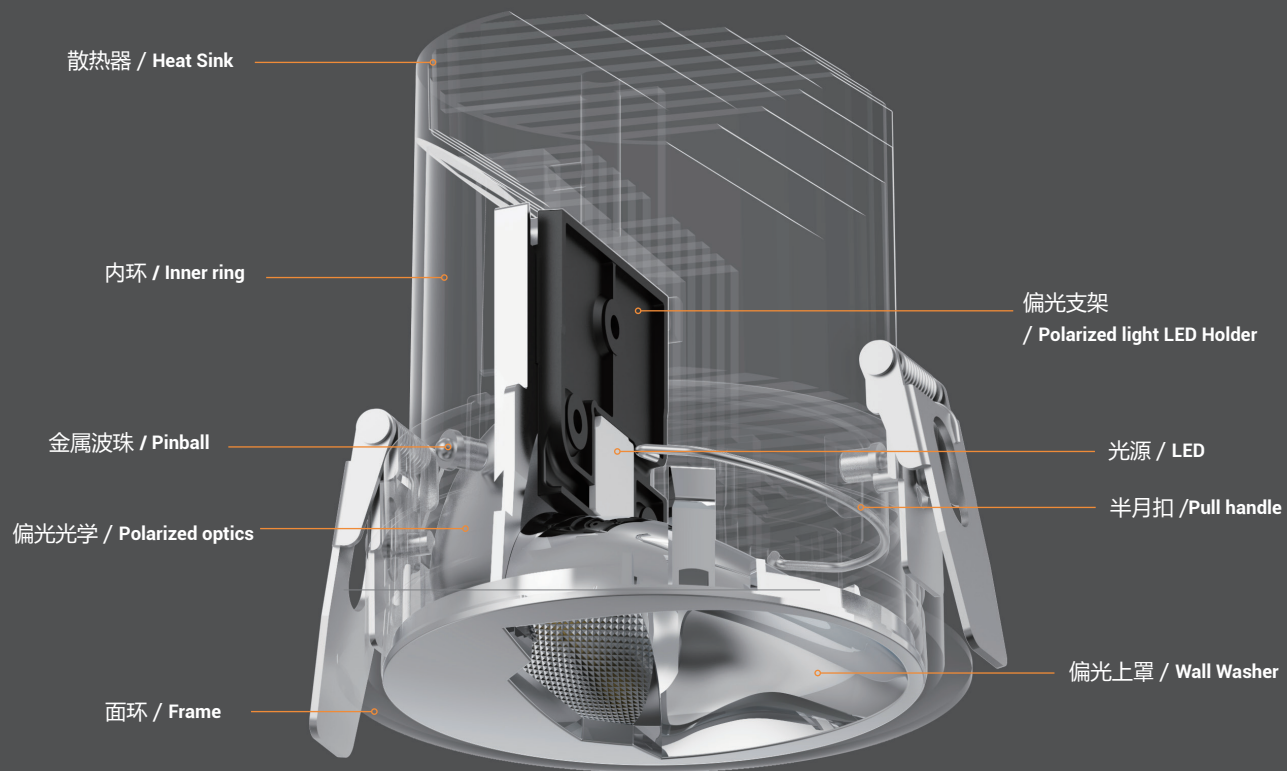

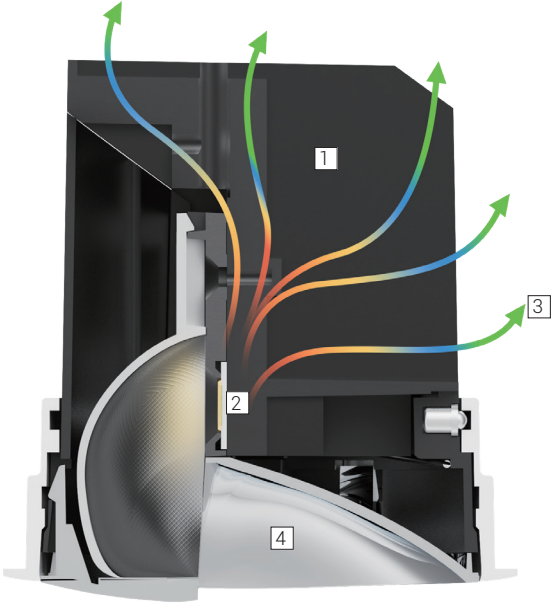

1

内胆可拆卸并可水平旋转 360°。
Removable lamp
liner,Horizontal rotation 360°.

2




侧装光源，二次反射后光线变柔和均匀，
精准无死角的一体洗墙。
Side mounted light source, with soft
and uniform light after secondary
reflection, accurately illuminating the
entire wall.

3

独创散热结构设计，改善灯具的空气对流动
力学性能，提高灯具散热性能，延长灯
具寿命。
Innovative heat dissipation structure
design improves the aerodynamic
performance of air convection in lamps,
enhances heat dissipation performance,
and extends the lifespan of lamps.


3

洗墙防眩光罩 - 通过遮挡一半面圈，达到
单面出光的效果，独特的出光方式让光线
更加纯粹均匀的满铺墙面（镀铬 + 电镀
黑）。
Wall washer anti glare cover - By blocking
half of the face circle, it achieves the effect
of single side light output. The unique light
output method makes the light more pure
and uniform, and the wall is fully covered.



可拆卸内胆，方便安装

Removable lamp liner

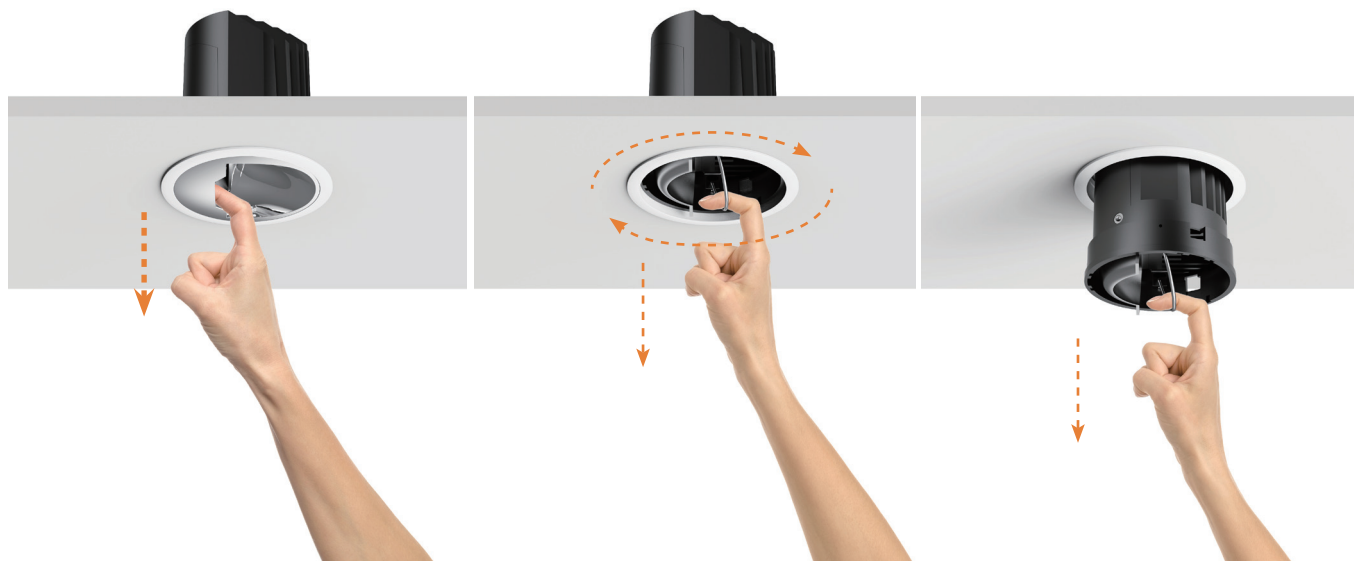

①

用手指向下扣出反射罩

Convenient pick-up

②

拉动半月扣，可旋转调节或向下取出内胆

Pull the handle to rotate and adjust,take out the inner liner


③

向下取出内胆

Take out the inner liner


灵活调整

Flexibly adjust

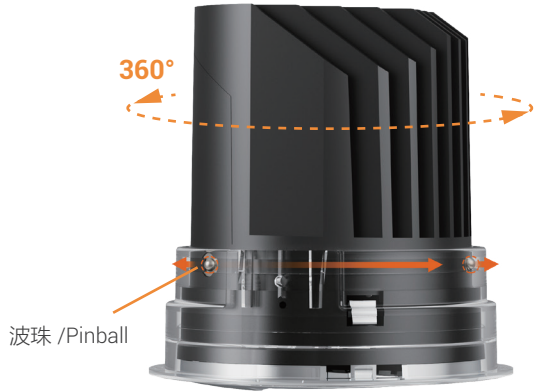

内环安装了三颗金属波珠，固定在面环卡槽内，
实现内胆固定和水平旋转 360°

Relying on three metal pinball to achieve 360
° horizontal free rotation

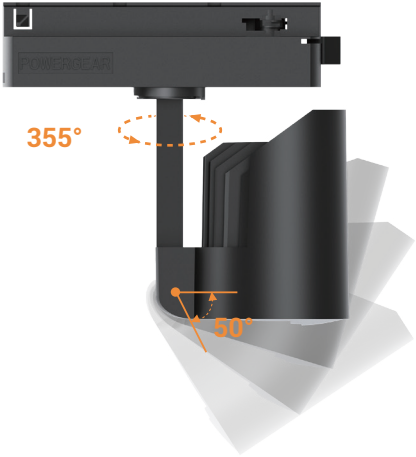

轻松旋转照射方向，结合轨道移动
实现精准打光

Easily rotate the irradiation direction,
combined with orbital movement achieve accurate lighting

洗墙比例

Wall washer ratio



0.8: 3: 0.8

嵌入式安装时出光端与天花顶部切平，洗墙的光斑分布比例 0.8(离墙) : 3 (高) : 0.8 (宽)。


During embedded installation, the light emitting end is cut flat with the top of the ceiling, and the distribution ratio of light spots for wall washing is 0.8 (away from the wall): 3 (high): 0.8 (wide).

注：安装比例仅供参考，请根据实际墙高做调节。

Adjust according to the actual wall height

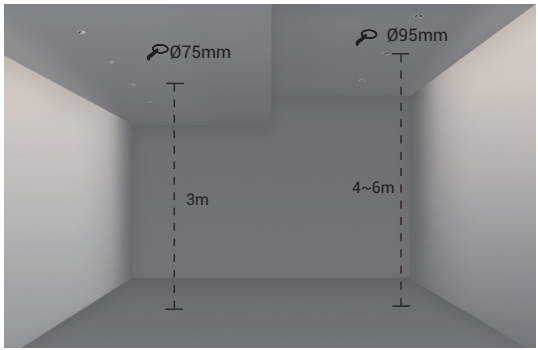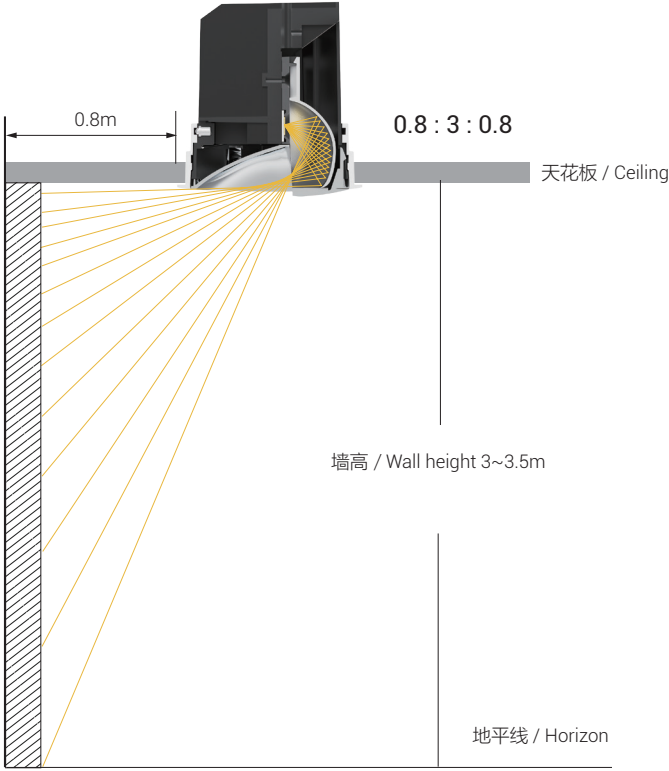

建议楼层 3m 使用开孔 75 的灯具，4~6m 使用开孔 95 灯具。

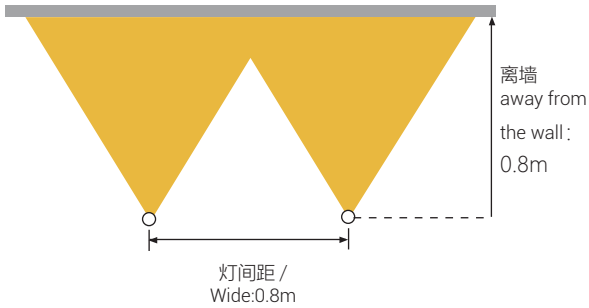

灯具安装间距 / Luminaire installation spacing



15°

灯具起始出光倾角: 15°

Tilting Angle: 15°



实景拍摄：层高 :3.3m/Φ75/4000K

多盏拼接洗墙佳， 洗出幕布般的光斑


可无缝拼接洗墙，光斑均匀过渡，无亮暗条纹


Seamless splicing wall washing, light spot uniform transition, no bright and dark stripes



借助如彩色光幕般的洗墙效果，为空间营造出别具一格的视觉体验，引发情感共鸣与思考，使人们于空间之中切实感受到艺术与环境的交融。

Using the colorful light - screen - like wall - washing effect, we craft a unique space look. It stirs emotions, sparks thoughts, and helps people feel art and environment merging.

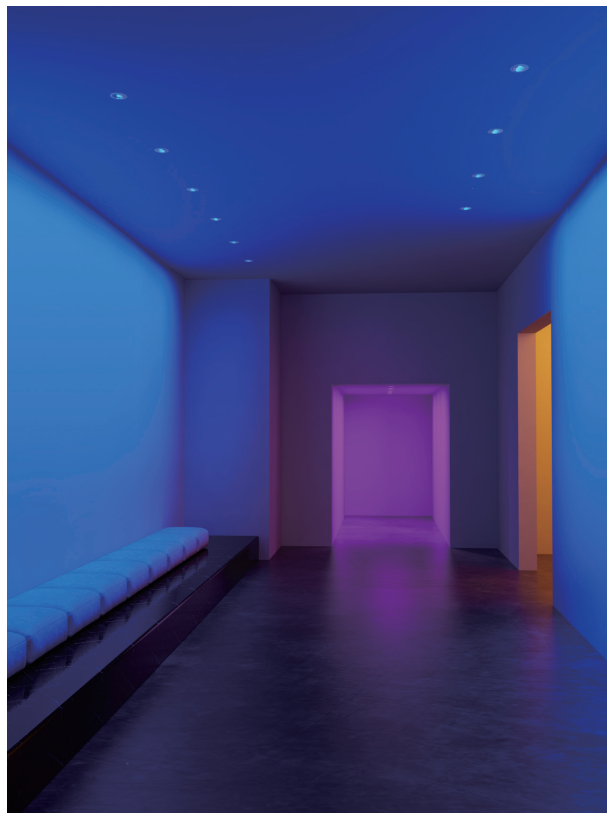

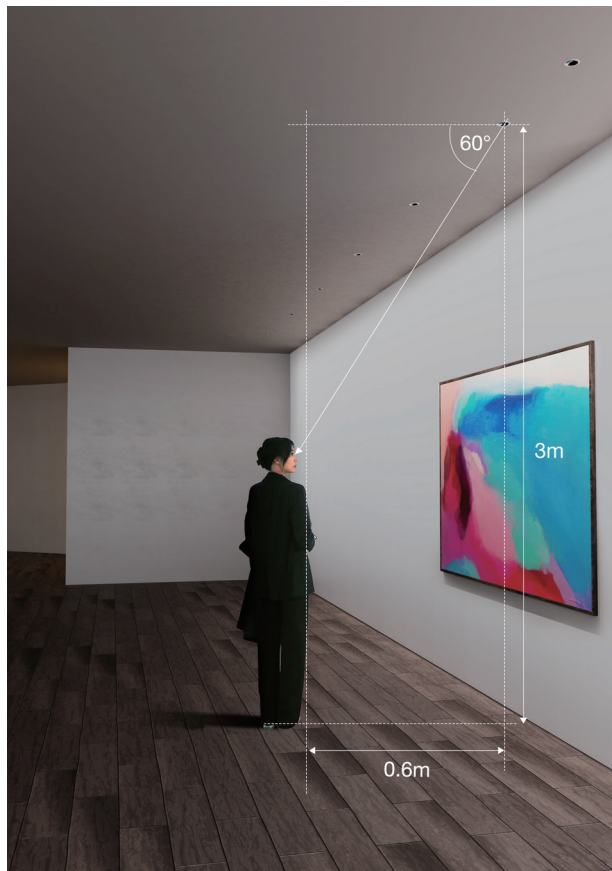


在艺术展厅，灯光的运用至关重要。

koler 洗墙灯独特的光学设计可避免光线直射人眼，有效防眩。即使站在距离灯安装位置仅 0.6m 的位置下，也不眩眼，UGR 为负值，让每一次欣赏，都沉浸在舒适无扰的光影氛围中。

In an art exhibition hall, lighting plays a pivotal role. The Koler wall - washer lamp features a distinctive optical design that effectively shields the eyes from direct light, minimizing glare significantly. Even when one stands merely 0.6m from the lamp's installation point, there is no discomfort from glare. With a negative UGR (Unified Glare Rating), it ensures that every viewing experience is steeped in a comfortable, glare - free light - shadow ambiance.


实测参数: U:221.15V I:0.0629A P:7.8868W PF:0.5673 Freq:50.00Hz 实测光通:428.983x1 lm		
灯具名称: KL-1016E55	灯具类型: 嵌入式射灯	灯具重量: /
灯具规格: 180mA	外置尺寸: ø55	测试编号: 1
制造厂商:	发光口面: 35	遮光角: 35°

光源数据		光度数据		光效: 54.39 lm/W	
型号	普瑞V6HD-8.5代	峰值光强 (cd)	483.9	S/MH (C0/180)	0.12
标称功率 (W)	7	灯具效率 (%)	100.0	S/MH (C90/270)	0.63
额定电源电压 (V)	220	总光通量 (lm)	428.98	η UP, DN (C0-180)	0.2, 91.7
额定光通量 (lm)	428.983	CIE分类	直接	η UP, DN (C180-360)	1.1, 7.0
灯具内光源数 (只)	1	上射光通比 (%)	1.3	CIBSE SHR NOM	0.00
实测电源电压 (V)	220	下射光通比 (%)	98.7	CIBSE SHR MAX	1.00

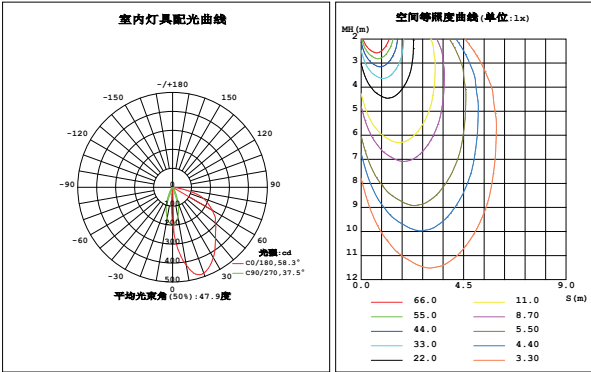


实测参数: U:221.07V I:0.1719A P:22.743W PF:0.5985 Freq:50.00Hz 实测光通:1415.03x1 lm		
灯具名称: KL-1016E95	灯具类型: 嵌入式射灯	灯具重量: /
灯具规格: 780mA	外置尺寸: ø95	测试编号: 1
制造厂商:	发光口面: 35	遮光角: 35°

光源数据		光度数据		光效: 62.22 lm/W	
型号	普瑞V10A-8.5代	峰值光强 (cd)	2196	S/MH (C0/180)	0.07
标称功率 (W)	25	灯具效率 (%)	100.0	S/MH (C90/270)	0.67
额定电源电压 (V)	220	总光通量 (lm)	1415.0	η UP, DN (C0-180)	0.3, 94.0
额定光通量 (lm)	1415.03	CIE分类	直接	η UP, DN (C180-360)	1.2, 4.4
灯具内光源数 (只)	1	上射光通比 (%)	1.6	CIBSE SHR NOM	0.00
实测电源电压 (V)	220	下射光通比 (%)	98.4	CIBSE SHR MAX	1.00

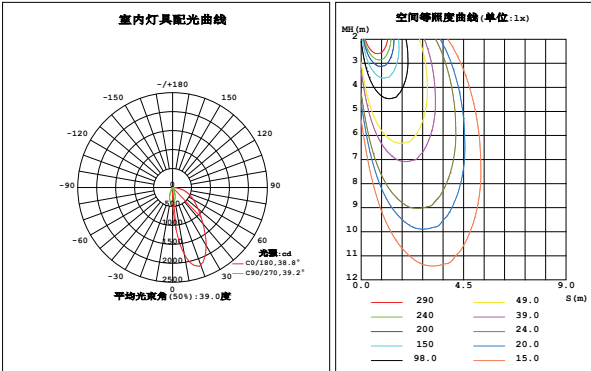

实测参数: U:221.06V I:0.0950A P:11.975W PF:0.5701 Freq:50.00Hz 实测光通:693.105x1 lm		
灯具名称: KL-1016E75	灯具类型: 嵌入式射灯	灯具重量: /
灯具规格: 300mA	外置尺寸: ø75	测试编号: 1
制造厂商:	发光口面: 35	遮光角: 35°

光源数据		光度数据		光效: 57.88 lm/W	
型号	普瑞V6HD-8.5代	峰值光强 (cd)	1065	S/MH (C0/180)	0.08
标称功率 (W)	12	灯具效率 (%)	100.0	S/MH (C90/270)	0.63
额定电源电压 (V)	220	总光通量 (lm)	693.11	η UP, DN (C0-180)	0.2, 95.4
额定光通量 (lm)	693.105	CIE分类	直接	η UP, DN (C180-360)	1.1, 3.3
灯具内光源数 (只)	1	上射光通比 (%)	1.4	CIBSE SHR NOM	0.00
实测电源电压 (V)	220	下射光通比 (%)	98.6	CIBSE SHR MAX	1.00

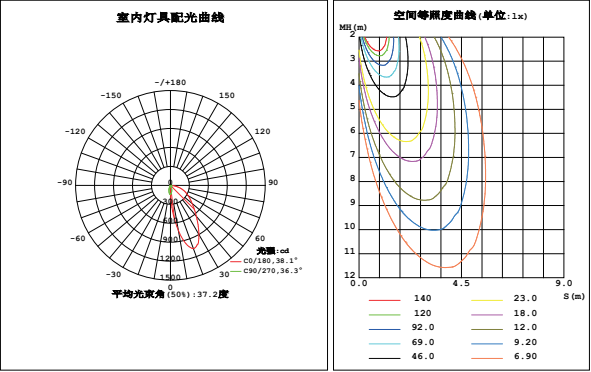

注：测试结果仅供参考



IES:

型号 Model 功率 Power 光效 Eff

KL-1016E55 8W 70~90 lm/W

KL-1016E75 13.5W 80~100 lm/W

KL-1016E95 26W 80~100 lm/W

无论是目测还是实测，
防眩光效果优秀
Whether it is visual or measured, the
anti-glare effect is excellent!

Multiple choice

多种选择

科勒系列除了内嵌入式，还设计了单头双头吊装式、轨道式、明装式，巧妙的与墙壁组合，可应用于各个区域，在提升空间品质的同时，增加了空间的采光，弱化了空间的封闭感，使静态的陈设富于光影变化，产生空间拓展的效果。

Koler series in addition to embedded, also designed a single head double head lifting type, track type, Surface type, smart combination with the wall, can be applied to various areas, while improving the quality of the space, increase the lighting of the space, weaken the sense of closure of the space, make the static furnishings rich in light and shadow changes, produce the effect of space expansion.



外露嵌入式 / Pendant embedded



内嵌入式 / Embedded



轨道式 / Track type




一体轨道式 / Integrated orbit-style



固定式明装 / Fixed surface




可调式明装 / Adjustable surface

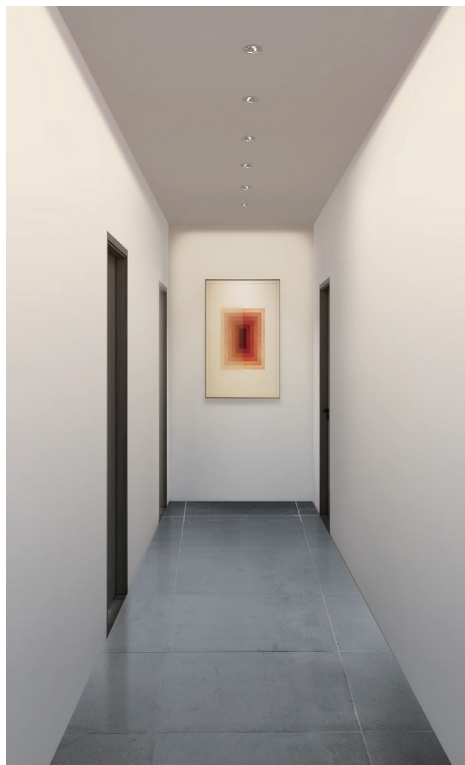

走道 / Walkway



KA 连锁展示 / KA Chain Store

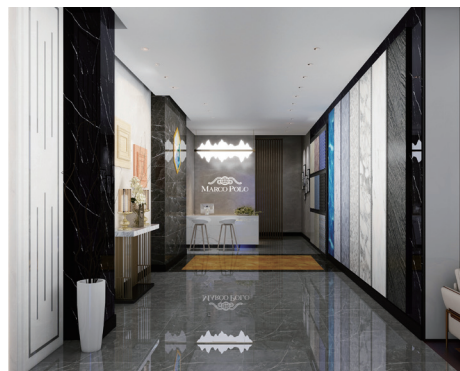

瓷砖店 / Ceramic tile store



博物馆 / Museum



L05311



功率 /Power: 8W

开孔 /Cutout: Ø55mm

尺寸 /Size(WxH): Ø61X84mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05312



功率 /Power: 13.5W

开孔 /Cutout: Ø75mm

尺寸 /Size(WxH): Ø80X84mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05313



功率 /Power: 26W

开孔 /Cutout: Ø95mm

尺寸 /Size(WxH): Ø105X116mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



反射罩 /Reflector cover:



NEW



L05314

定制款




功率 /Power: 8W

开孔 /Cutout: Ø55mm

尺寸 /Size(WxH): 110X84mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05315

定制款





功率 /Power: 13.5W

开孔 /Cutout: Ø75mm

尺寸 /Size(WxH): 133X84mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05316

定制款





功率 /Power: 26W

开孔 /Cutout: Ø95mm

尺寸 /Size(WxH): 160X116mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



反射罩 /Reflector cover:






IP40



L05317



功率 /Power: 13.5W
 开孔 /Cutout: Ø55mm
 尺寸 /Size(WxH): 93x73x117mm
 光束角 /Beam angle: Wall Washer
 支架 /Standard holder:




NEW



L05318






功率 /Power: 26W
 开孔 /Cutout: Ø75mm
 尺寸 /Size(WxH): 118x94x140mm
 光束角 /Beam angle: Wall Washer
 支架 /Standard holder:



L05319



功率 /Power: 2x26W
 开孔 /Cutout: Ø75mm
 尺寸 /Size(WxH): 212x118x145mm
 光束角 /Beam angle: Wall Washer
 支架 /Standard holder:



反射罩 /Reflector cover:






L05324


定制款

功率 /Power: 2x26W

尺寸 /Size(WxH): 212x118x145mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder: 16.23  13.9 



NEW



L05320


定制款

功率 /Power: 13.5W

尺寸 /Size(WxH): 93x73x158mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder: 13.5 



L05321


定制款

功率 /Power: 26W

尺寸 /Size(WxH): 118x94x140mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder: 16.23  13.9 



反射罩 /Reflector cover:




NEW



L05322

定制款



功率 /Power: 2x13.5W
尺寸 /Size(WxH): 166x93x158mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder:



L05323

定制款



功率 /Power: 2x26W
尺寸 /Size(WxH): 212x118x145mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder:



L05325

定制款

功率 /Power: 13.5W
尺寸 /Size(WxH): 93x73x205mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder:



反射罩 /Reflector cover:





L05326

定制款





功率 /Power: 26W

尺寸 /Size(WxH): 118x94x230mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



NEW



L05327

定制款





功率 /Power: 2x13.5W

尺寸 /Size(WxH): 166x103x208mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



L05328

定制款





功率 /Power: 2x26W

尺寸 /Size(WxH): 212x127x235mm

光束角 /Beam angle: Wall Washer

支架 /Standard holder:



反射罩 /Reflector cover:



NEW




L05329

定制款



功率 /Power: 13.5W
尺寸 /Size(WxH): Ø72.5x133mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder:





L05330

定制款



功率 /Power: 26W
尺寸 /Size(WxH): Ø92.5x158mm
光束角 /Beam angle: Wall Washer
支架 /Standard holder:




反射罩 /Reflector cover:




IP40

Tianyue


添越系列

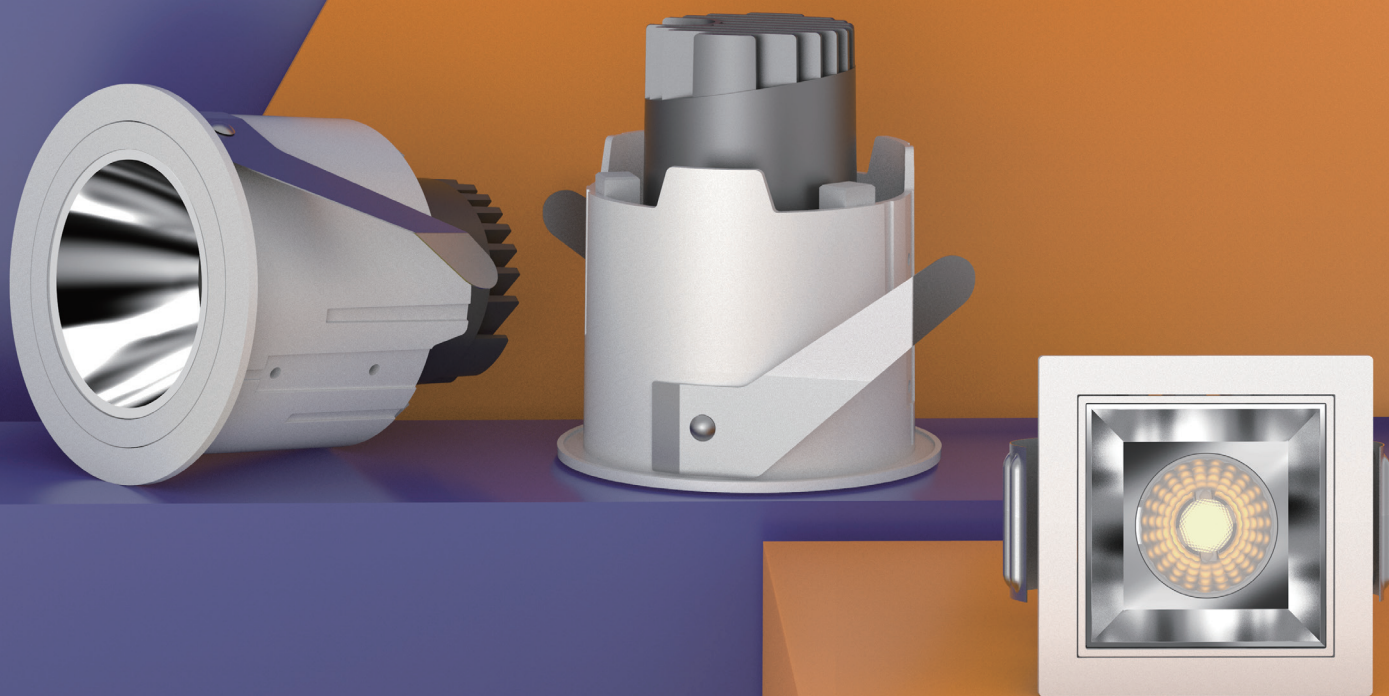

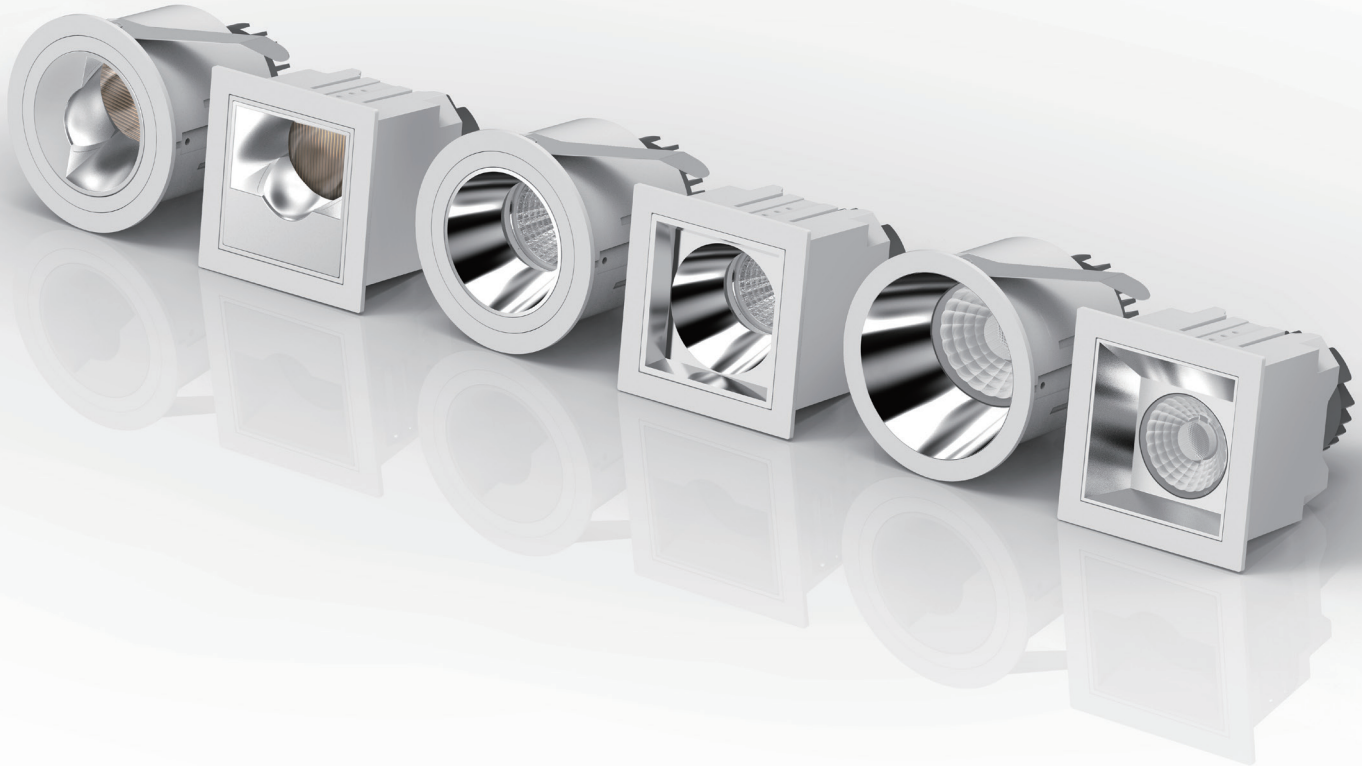

CREE 

- Simple appearance provides a clean and tidy effect.
- Round and square two shapes provide customers selection per requests.
- General lighting or guide for museums. exhibitions. art galleries. offices. residence and also in commercial applications.
- 简洁外观提供整洁干净的效果。
- 圆形和方形两种形状可供客户根据要求进行选择。
- 博物馆、展览、美术馆、办公室、住宅和商业应用的一般照明或指南。

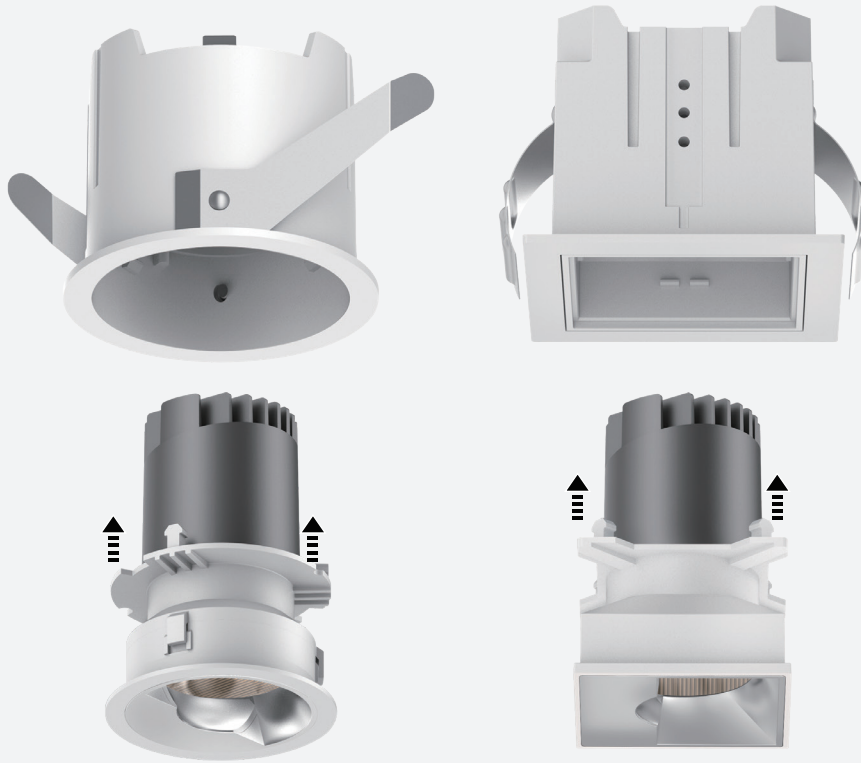

New Downlight

The new press device ensures the convenience of disassembly and replacement

新的按压装置设计，保证了拆装更换的方便性

- 1 Press mounting, easy to replace.


按压式安装，便于更换

- 2 Efficient thermal management guarantee long lifespan.

高效的热管理保证了长寿命

- 3 Different beam angle reflectors available for spot or general lighting effect.

可用于聚光或一般照明效果的不同光束角度反射器

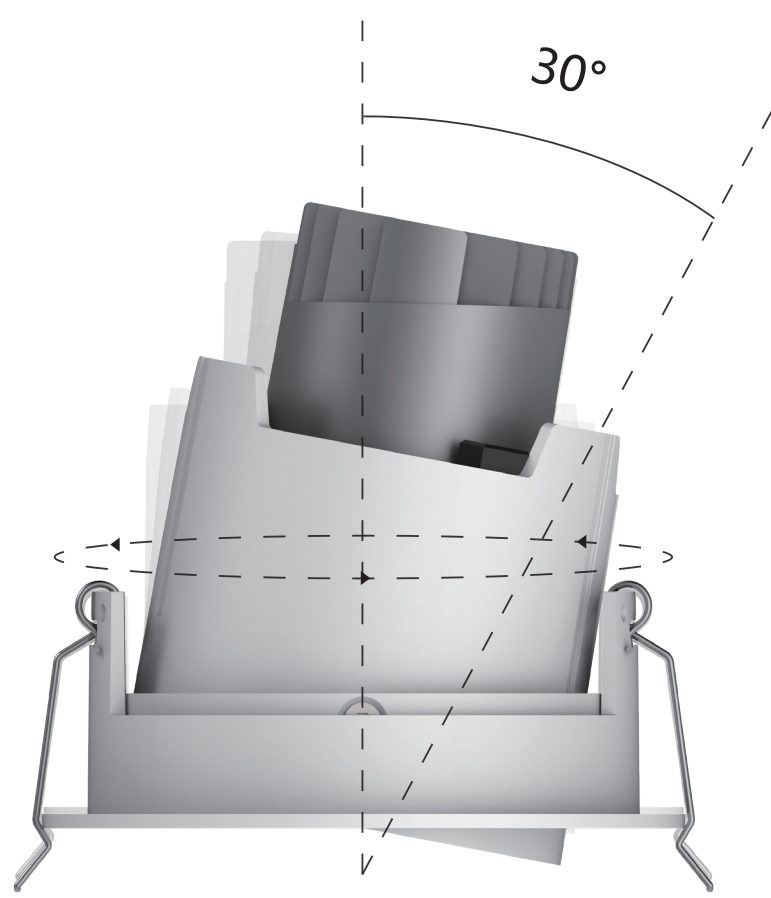

大角度摆角

Large angle swing angle

多方向，多角度摆角自由选择角度
角度最大为 30


Multi direction, multi angle swing angle, free choice of angle
The maximum angle is 30 °


分体式结构

Split structure

灯具预埋设计、安装快捷、维护方便
创新高效率黑光镜面

Embedded design of lamps, fast installation and
convenient maintenance
Innovative high efficiency black mirror

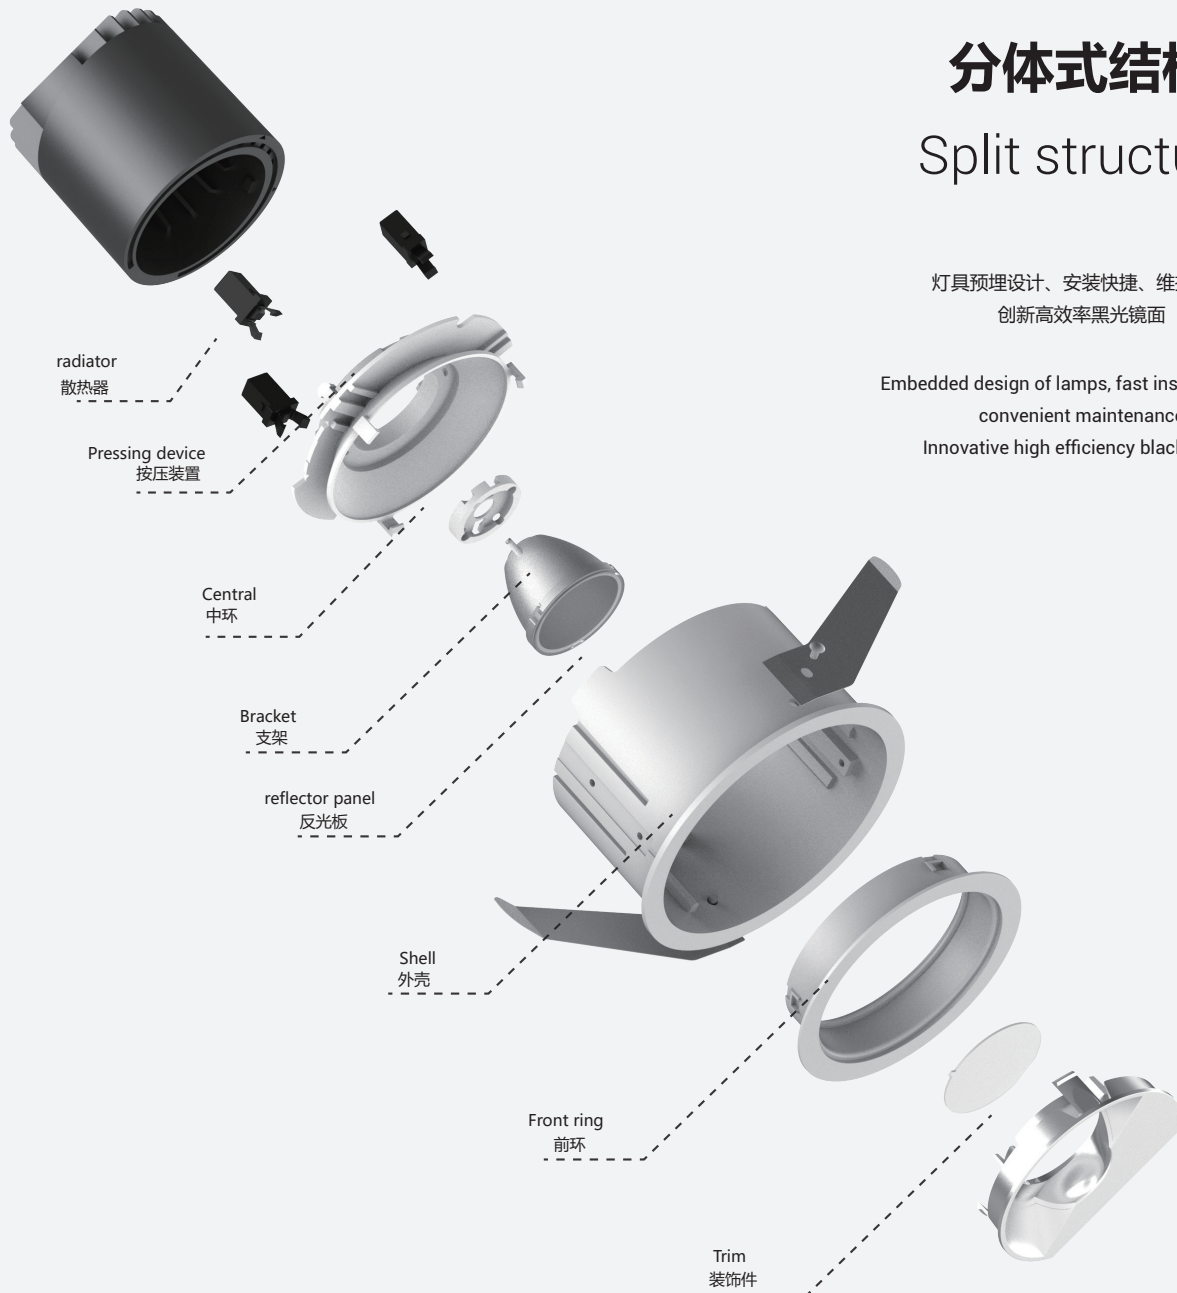

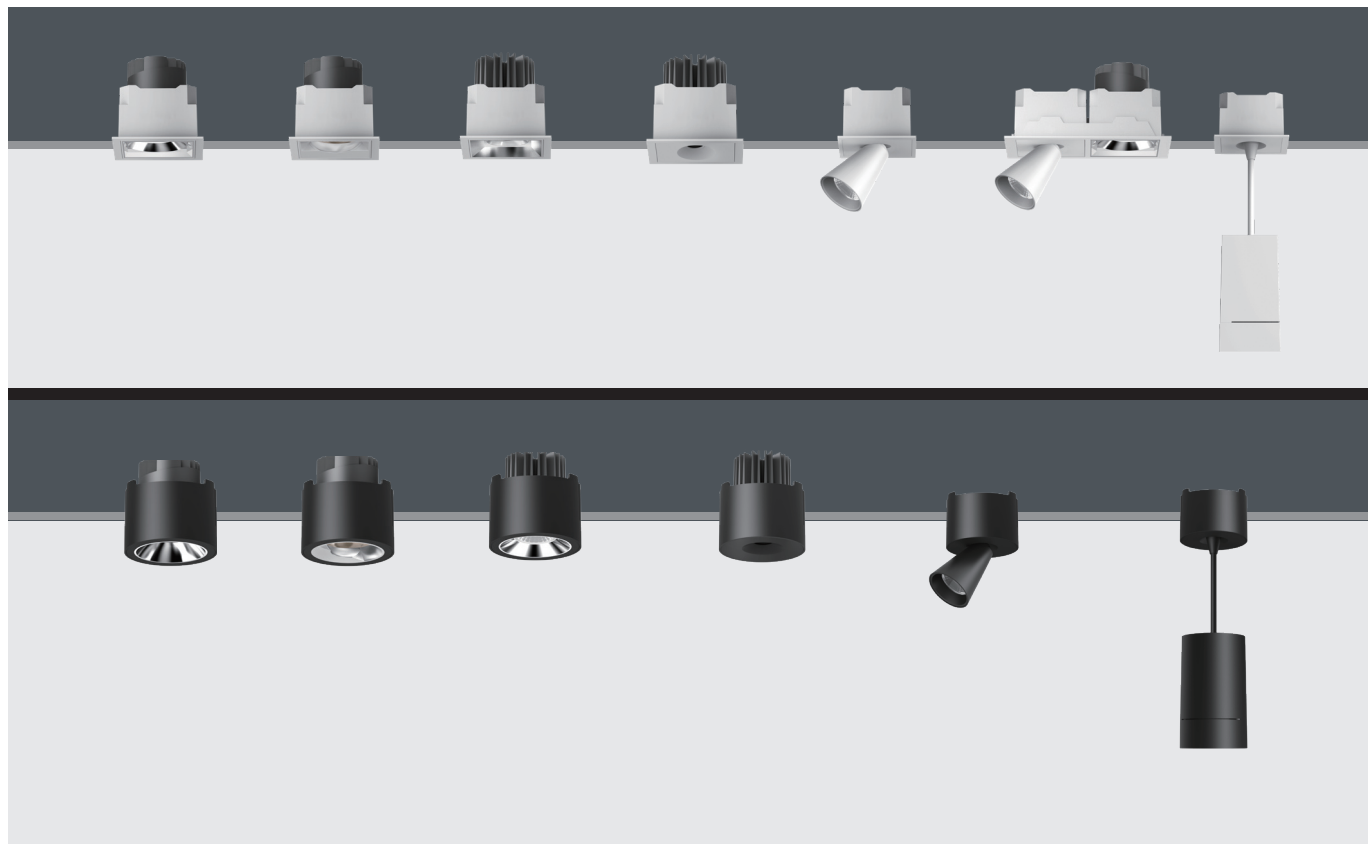

Choice, more than one

The lamp body can be black and white to meet the needs of various occasions;
With multi power and multi-purpose, wide selection.

多样化选择，灯体可选黑色和白色，迎合各种场合所需拥有功率及多用途，可选性广。




6W
power: 6W



12W
power: 12W



20W
power: 20W

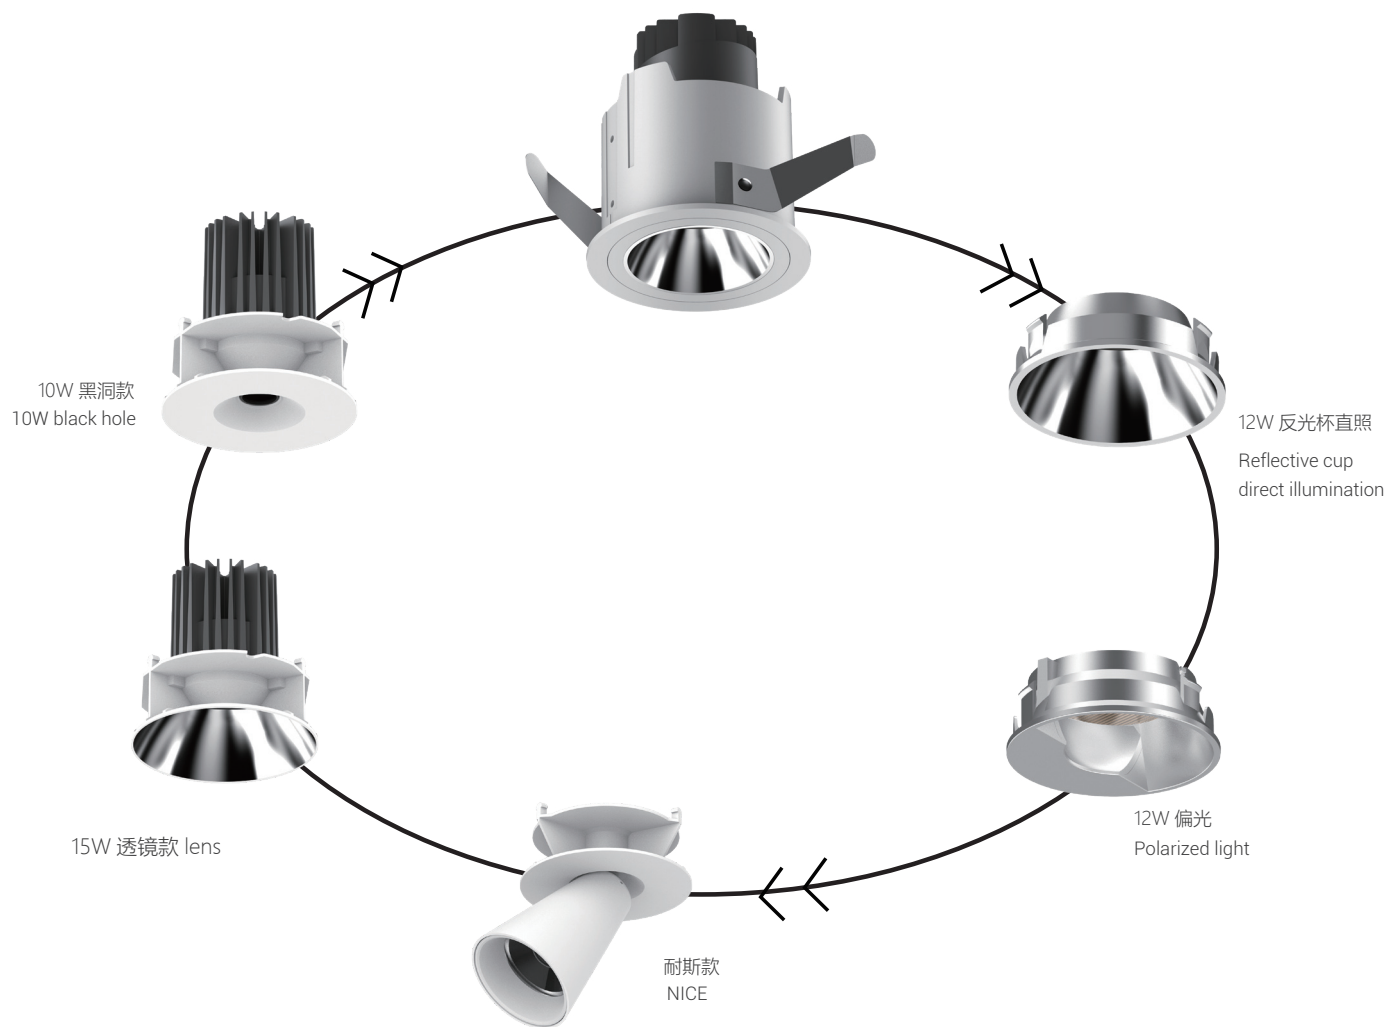

多种配光分布


Multiple light distribution

通过更换光学件，达到多场景适用的目的

Multi scenario application

Tianyue series lamps and lanterns are new products designed and developed for various scenarios. They have excellent heat dissipation and effectively protect the long life of electrical appliances. A variety of power and a variety of angles, so that the light in the space as you want it to shine in any area.

添越系列灯具是为了适用于各种场景而设计研发的新产品，优良的散热，有效保护电器的长寿命。多种功率及多种角度，让光在空间中随心所欲，照到任何您希望它所在的区域。

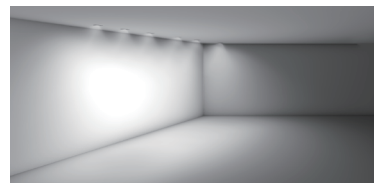


1 can illuminate the wall without dazzling.

偏光：洗墙




2 The irradiation range is wide and the angle can be adjusted.

基础照明：照射范围广

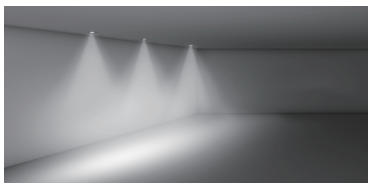

3 Improve lighting efficiency.

直照：提高光照效率

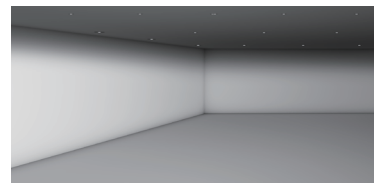

4 can illuminate the wall without dazzling.

黑洞：超级防眩晕



5 Spotlight: focus light

射灯：重点照明



6 Improve lighting efficiency.

喇叭：可调角度达 180°



Colour:

 Sand gold

 Pearl Black

 Black


 White

 Silver


 Chrome

Optional :

 Honey comb

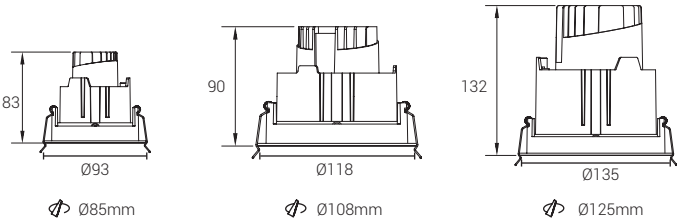

型号 /Model Code	L05331	L05332	L05333
功率 /Power	6W	12W	20W
开孔 /Cut out	Φ85mm	Φ108mm	Φ125mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ93x83mm	Φ118x90mm	Φ135x132mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20

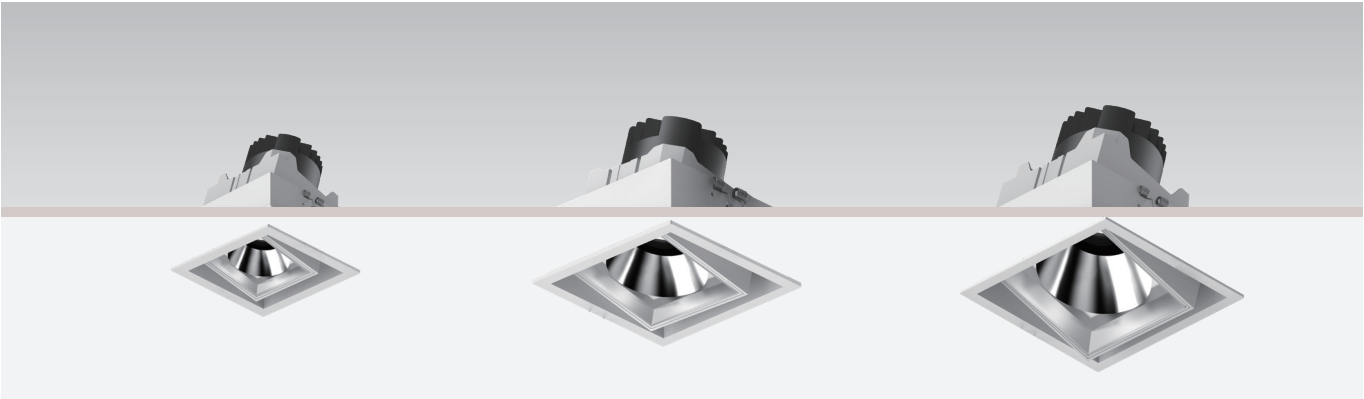

Colour:




Sand gold Pearl Black Black White Silver Chrome


Optional :



Honey comb

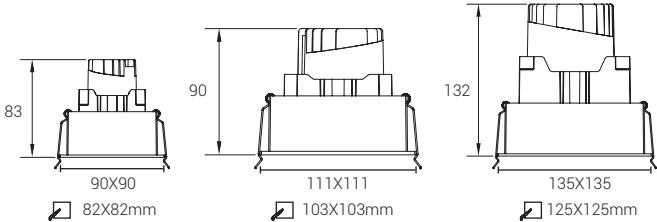

型号 /Model Code	L05334	L05335	L05336
功率 /Power	6W	12W	20W
开孔 /Cut out	82X82mm	103X103mm	125X125mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	91x91x83mm	111x111x90mm	135x135x132mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20

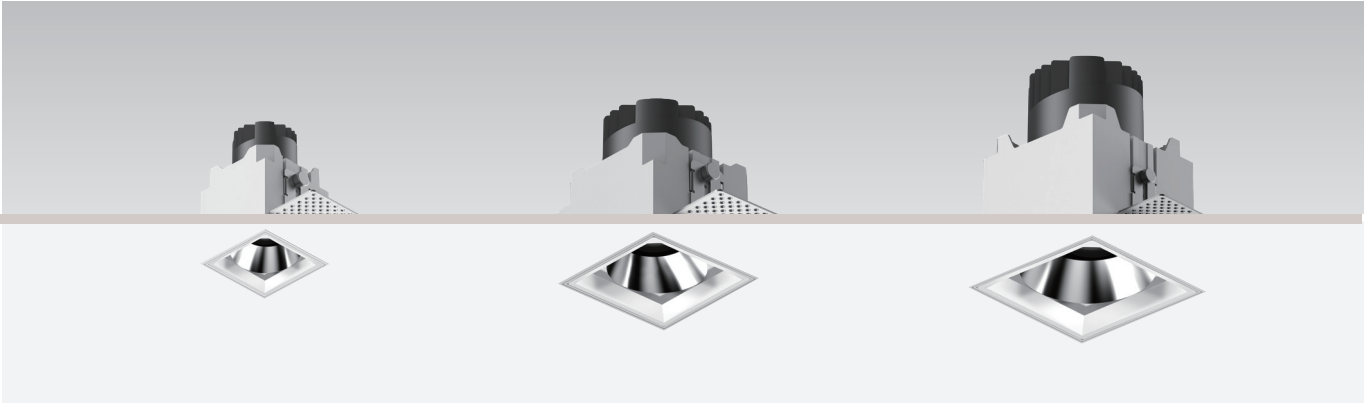

Colour:

 Sand gold

 Pearl Black

 Black


 White

 Silver

 Chrome

Optional :

 Honey comb

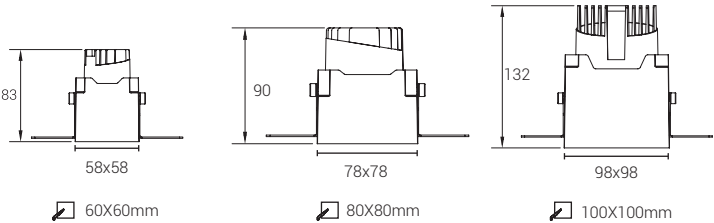

型号 /Model Code	L05337	L05338	L05339
功率 /Power	6W	12W	20W
开孔 /Cut out	60X60mm	80X80mm	100X100mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	58x58x83mm	78x78x90mm	98x98x132mm

眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20



Colour:

 Sand gold

 Pearl Black

 Black


 White

 Silver


 Chrome

Optional :

 Honey comb

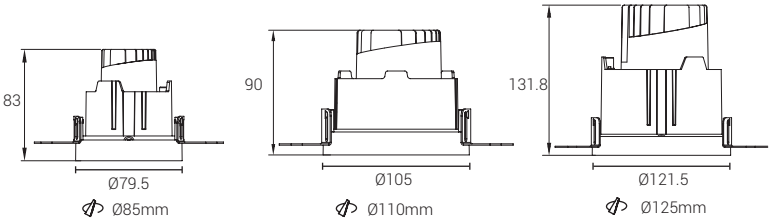

型号 /Model Code	L05340	L05341	L05342
功率 /Power	6W	12W	20W
开孔 /Cut out	Φ85mm	Φ110mm	Φ125mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ80x83mm	Φ105x90mm	Φ122x132mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20

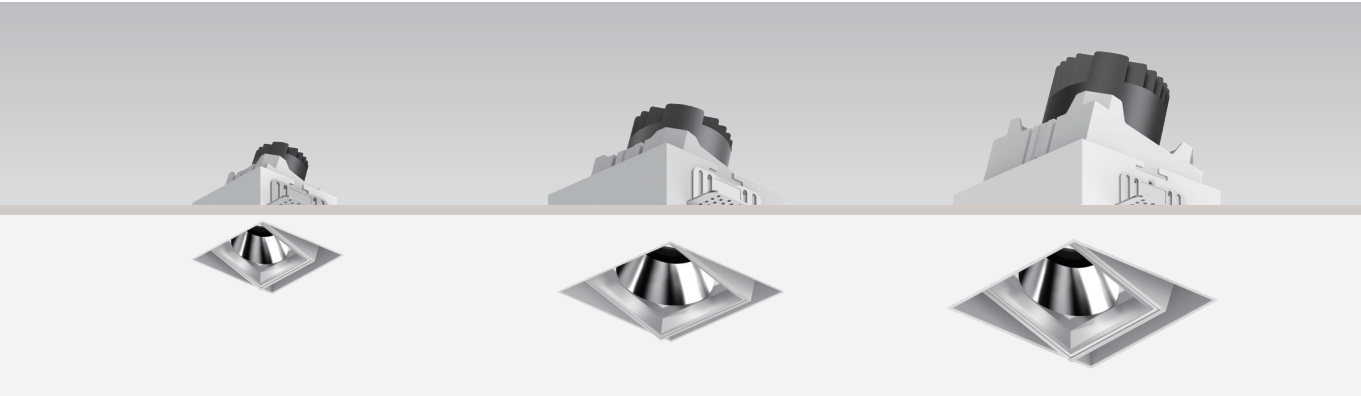

Colour:

 Sand gold

 Pearl Black

 Black


 White

 Silver

 Chrome


Optional :

 Honey comb

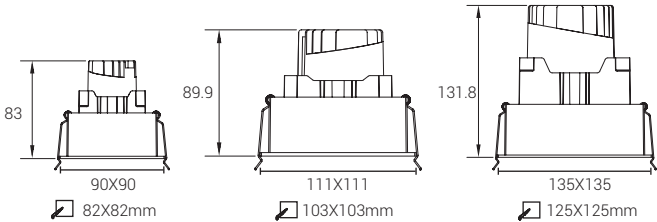

型号 /Model Code	L05343	L05344	L05345
功率 /Power	6W	12W	20W
开孔 /Cut out	82X82mm	103X103mm	125X125mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	78x78x83mm	99x99x90mm	122x122x132mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20

NEW

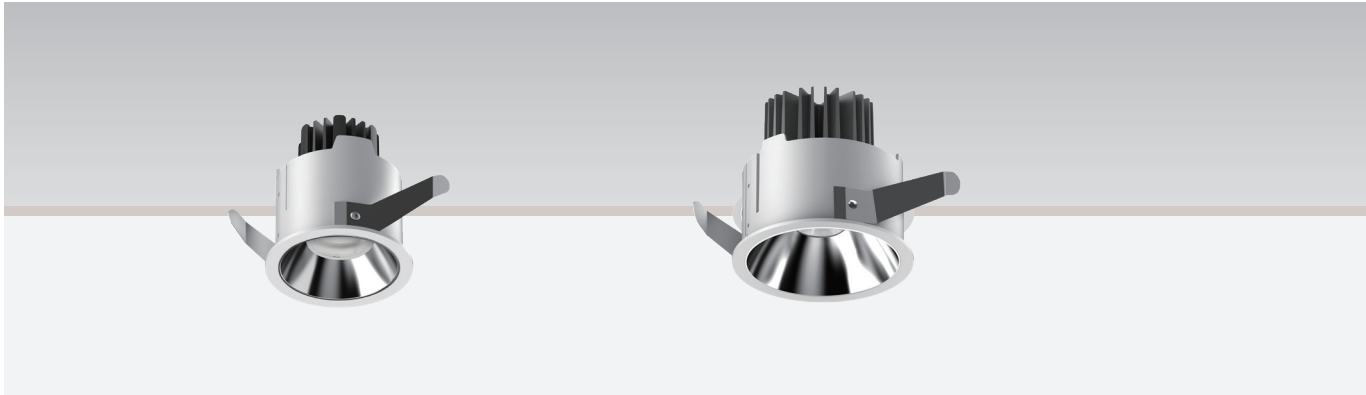

Colour:

 Sand gold

 Pearl Black

 Black


 White

 Silver


 Chrome

Optional :

 Honey comb




Ø 70mm



Ø 94mm

型号 /Model Code	L05346	L05347
功率 /Power	10W	16W
开孔 /Cut out	Φ70mm	Φ94mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ75x84mm	Φ100x83mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 36°/ 55°	12°/ 24°/ 36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW

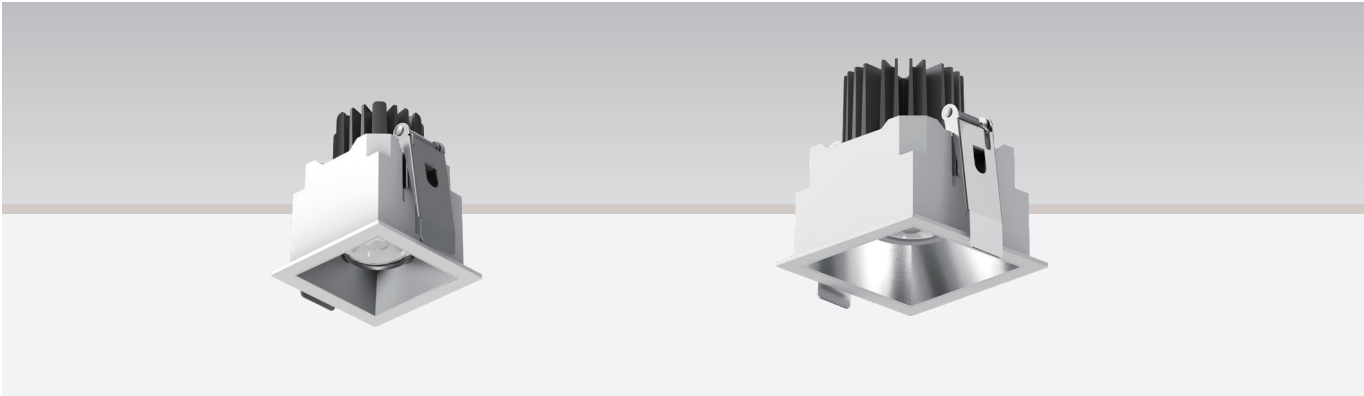

Colour:





Sand gold Pearl Black Black White Silver Chrome

Optional :



Honey comb



型号 /Model Code	L05348	L05349
功率 /Power	10W	16W
开孔 /Cut out	60X60mm	80X80mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	72x72x84mm	90x90x83mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 36°/ 55°	12°/ 24°/ 36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW



Colour:




Sand gold Pearl Black Black White Silver Chrome

Optional :




Honey comb




型号 /Model Code	L05350	L05351
功率 /Power	10W	16W
开孔 /Cut out	Φ80mm	Φ110mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ93x84mm	Φ118x83mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 36°/ 55°	12°/ 24°/ 36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW

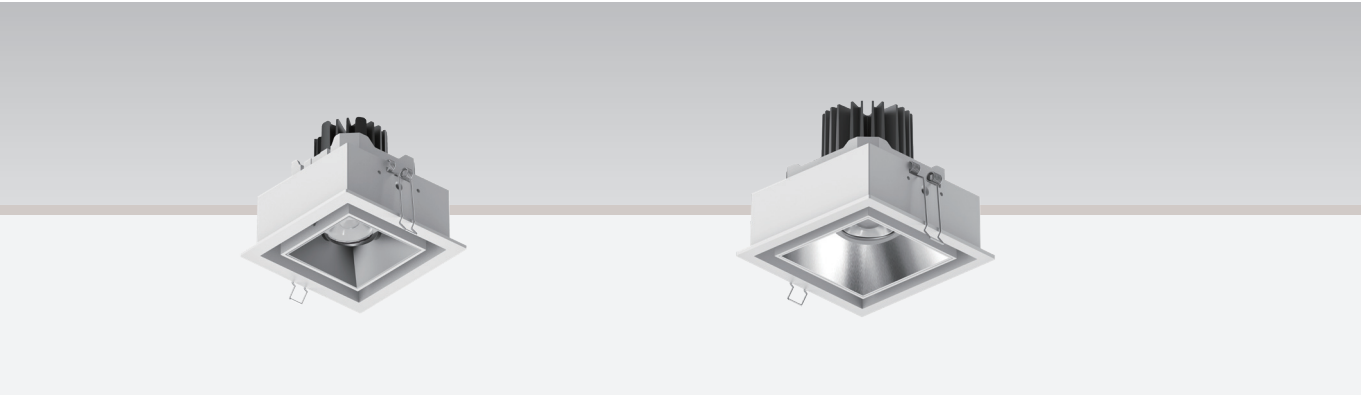


- Colour:
-  Sand gold
 -  Pearl Black
 -  Black
 -  White
 -  Silver
 -  Chrome
- Optional :
-  Honey comb



型号 /Model Code	L05352	L05353
功率 /Power	10W	16W
开孔 /Cut out	82X82mm	103X103mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	91X91X84mm	111X111x90mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 36°/ 55°	12°/ 24°/ 36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20



NEW

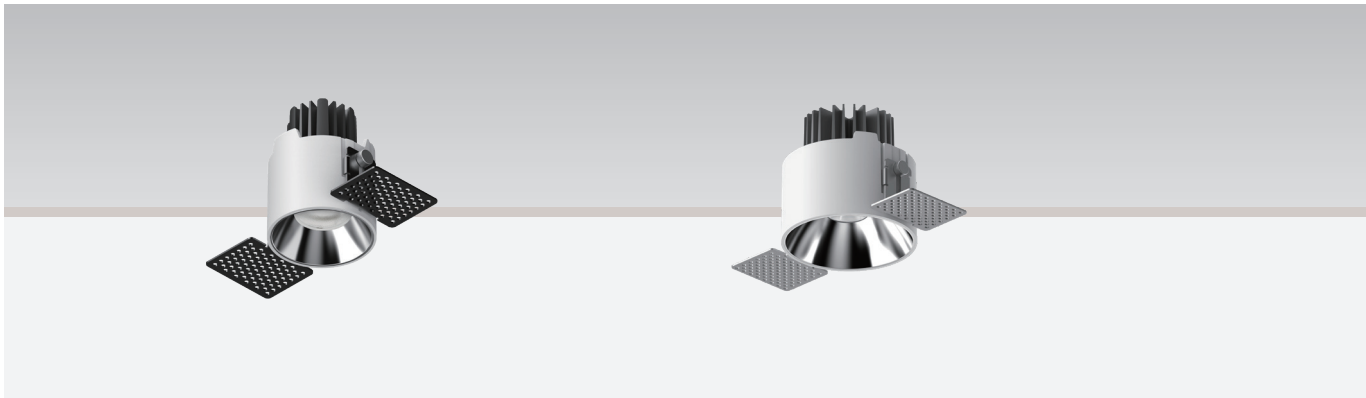

Colour:




Optional :



型号 /Model Code	L05354	L05355
功率 /Power	10W	16W
开孔 /Cut out	Φ70mm	Φ94mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ65x88mm	Φ90x83mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 36°/ 55°	12°/ 24°/ 36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20


NEW

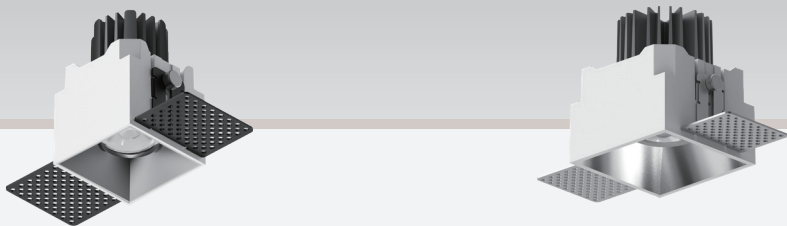

Colour:




Optional :



型号 /Model Code	L05356	L05357
功率 /Power	10W	16W
开孔 /Cut out	60X60mm	80X80mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	58X58X84mm	78X78X90mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 36°/ 55°	12°/ 24°/ 36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW

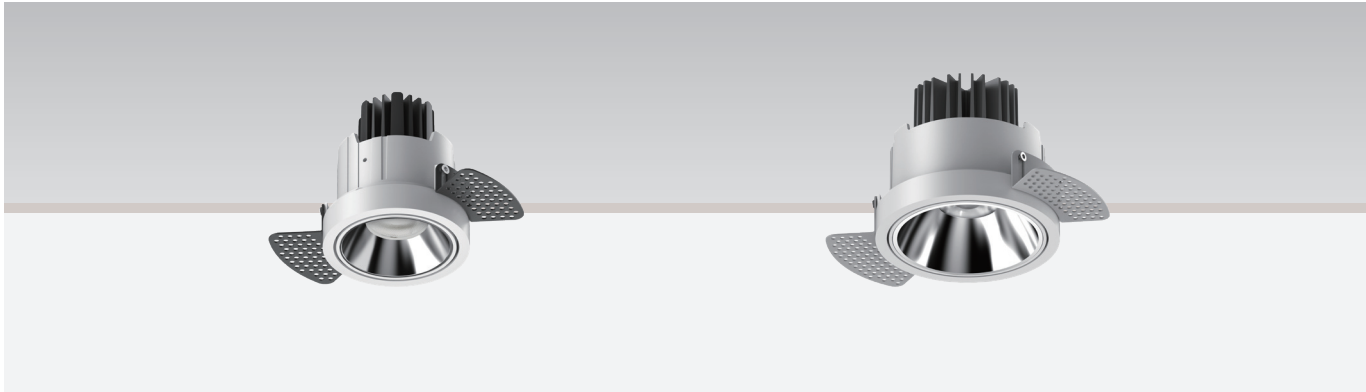

Colour:




Sand gold Pearl Black Black White Silver Chrome


Optional :



Honey comb




Φ 85mm



Φ 110mm

型号 /Model Code	L05358	L05359
功率 /Power	10W	16W
开孔 /Cut out	Φ85mm	Φ110mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ79x84mm	Φ105x90mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 36°/ 55°	12°/ 24°/ 36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20


NEW

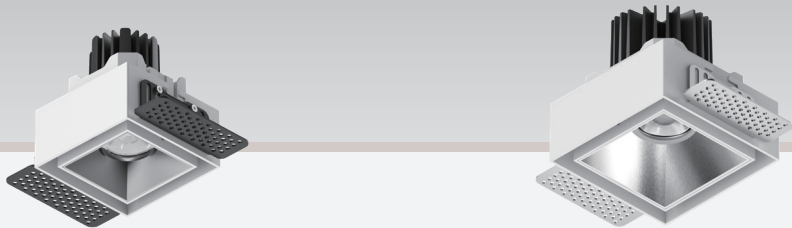


Colour:



Optional :






82x82mm



103x103mm



型号 /Model Code	L05360	L05361
功率 /Power	10W	16W
开孔 /Cut out	82X82mm	103X103mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	77X77X84mm	99X99x90mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 36°/ 55°	12°/ 24°/ 36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW

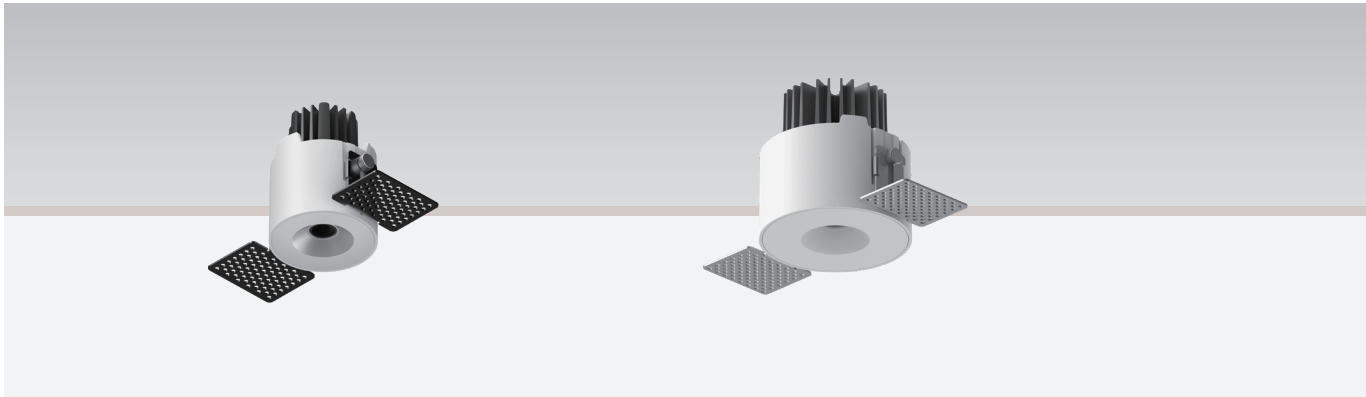


型号 /Model Code	L05362	L05363
功率 /Power	8W	12W
开孔 /Cut out	Φ70mm	Φ95mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ65x88mm	Φ90x90mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	24° / 36°	24° / 36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW

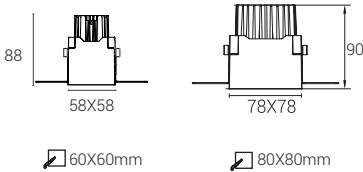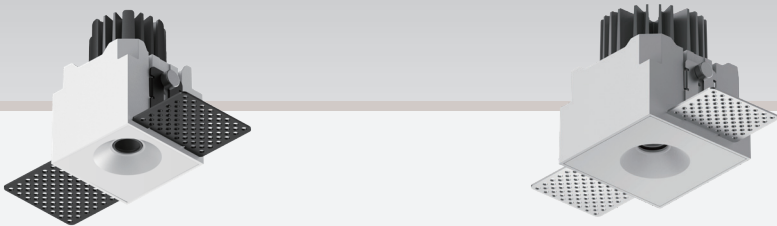

型号 /Model Code	L05364	L05365
功率 /Power	8W	12W
开孔 /Cut out	60X60mm	80X80mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	58X58X88mm	78X78x90mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	24° / 36°	24° / 36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW

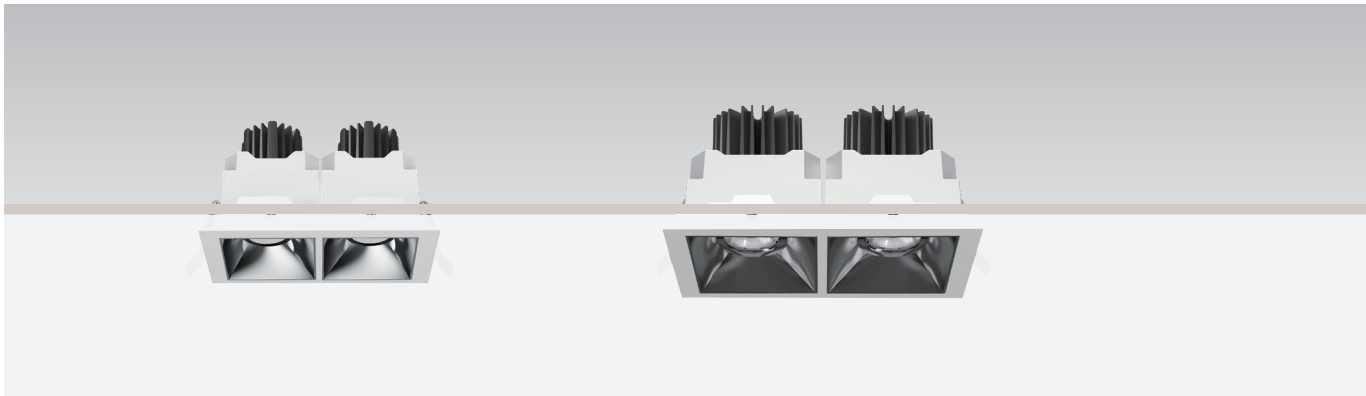

Colour:




Sand gold Pearl Black Black White Silver Chrome

Optional :




Honey comb

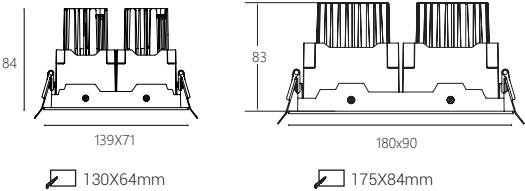

型号 /Model Code	L05366	L05367
功率 /Power	2X10W	2X16W
开孔 /Cut out	130X64mm	175X84mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	139X71X84mm	180X90X83mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/50°	15°/24°/36°/50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW

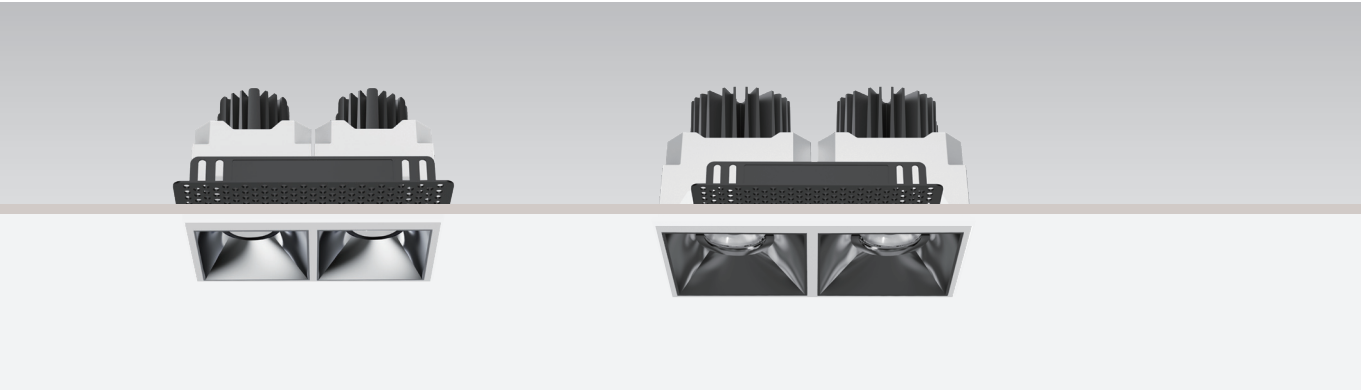

Colour:





Sand gold Pearl Black Black White Silver Chrome


Optional :




Honey comb





型号 /Model Code	L05368	L05369
功率 /Power	2X10W	2X16W
开孔 /Cut out	130X71mm	170X90mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	125X65X84mm	167X83X83mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°/50°	15°/24°/36°/50°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

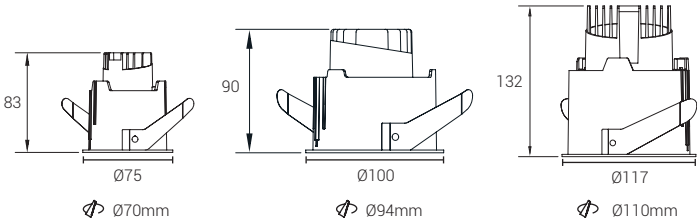



型号 /Model Code	L05370	L05371	L05372
功率 /Power	6W	12W	20W
开孔 /Cut out	Φ70mm	Φ94mm	Φ110mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ75x83mm	Φ100x90mm	Φ117x132mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	倾角：15°	倾角：15°	倾角：15°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20

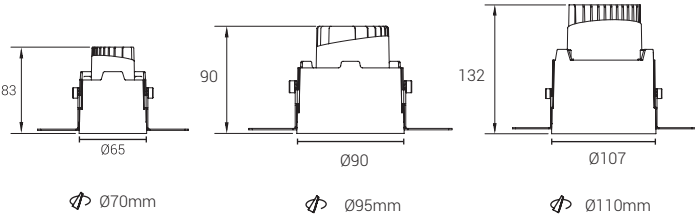



型号 /Model Code	L05376	L05377	L05378
功率 /Power	6W	12W	20W
开孔 /Cut out	Φ70mm	Φ95mm	Φ110mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	Φ65x83mm	Φ90x90mm	Φ107x132mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	倾角：15°	倾角：15°	倾角：15°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20

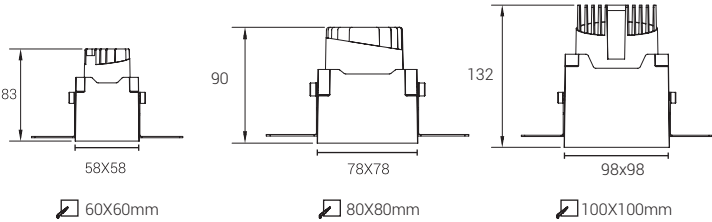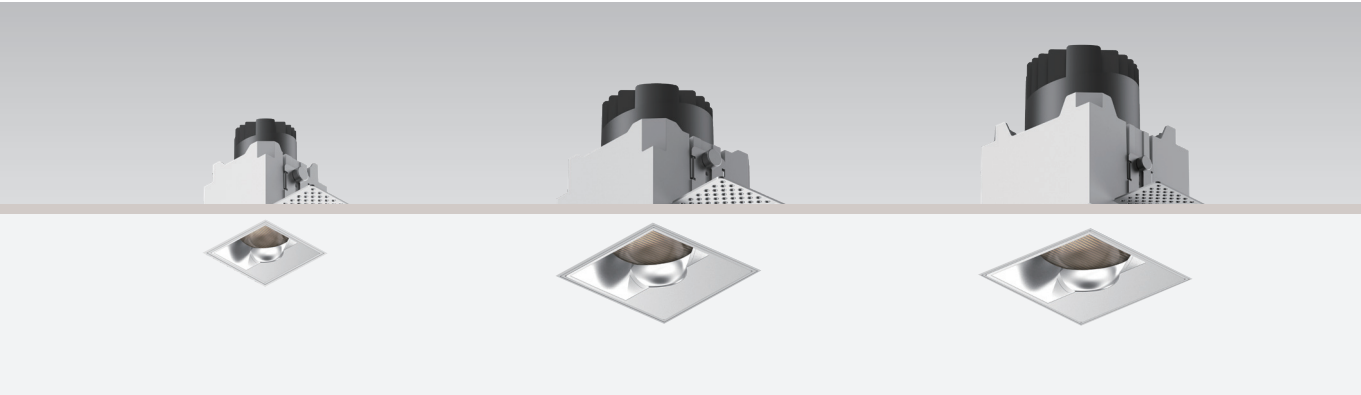

型号 /Model Code	L05379	L05380	L05381
功率 /Power	6W	12W	20W
开孔 /Cut out	60X60mm	80X80mm	100X100mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(LxWxH)	58x58x83mm	78x78x90mm	98x98x132mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	倾角：15°	倾角：15°	倾角：15°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20

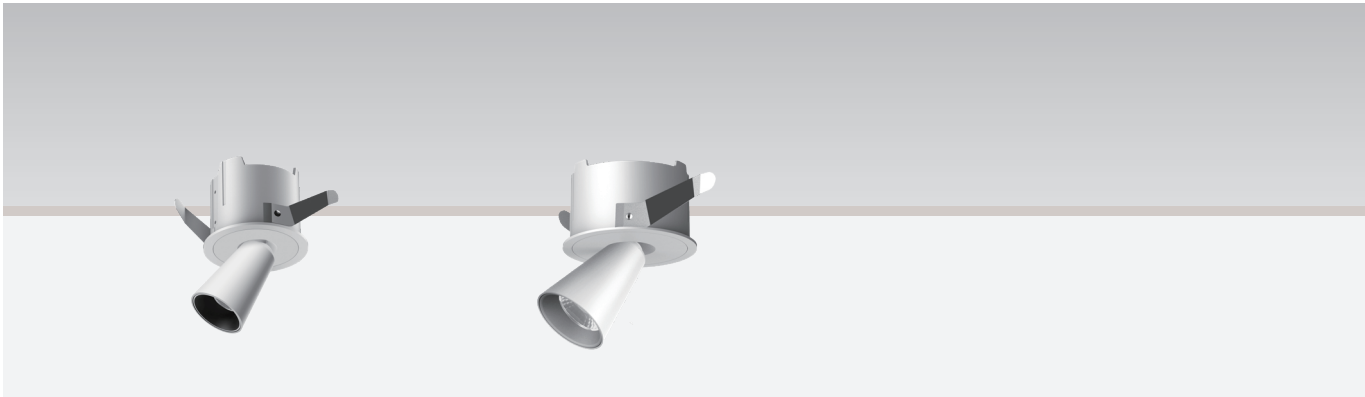


型号 /Model Code	L05382	L05383
功率 /Power	5W	10W
开孔 /Cut out	Φ70mm	Φ94mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	Φ75x60mm	Φ100x65mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°24°/ 38°	15°/ 24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

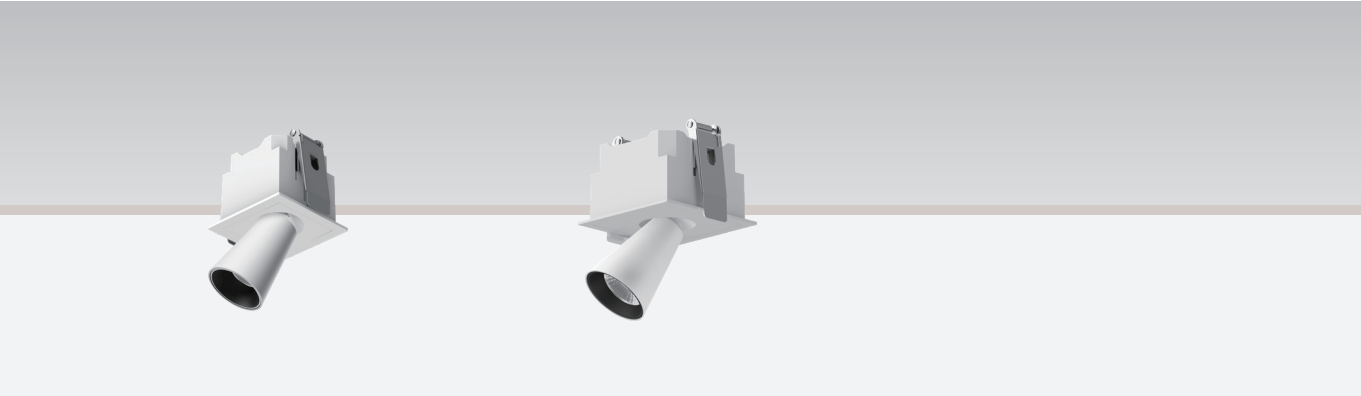

型号 /Model Code	L05384	L05385
功率 /Power	5W	10W
开孔 /Cut out	60X60mm	80X80mm
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	70x70x65mm	90X90X65mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24° /38°	15°/ 24° /38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

NEW

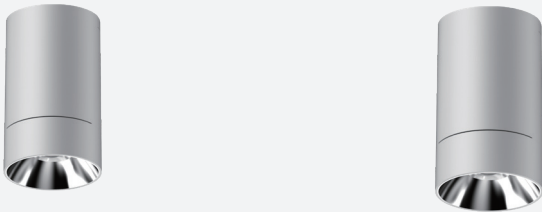

Colour:



Sand gold



Pearl Black



Black



White



Silver




Chrome

Optional :




Honey comb



型号 /Model Code	L05386	L05387
功率 /Power	10W	16W
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Ø65X135mm	Ø90X149mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12° /24° /36°/ 55°	12° /24° /36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20


NEW

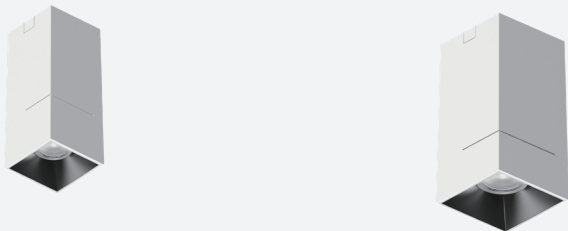


Colour:



Optional :




型号 /Model Code	L05388	L05389
功率 /Power	10W	16W
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	60X60X136mm	78X78X150mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12° /24° /36°/ 55°	12° /24° /36°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

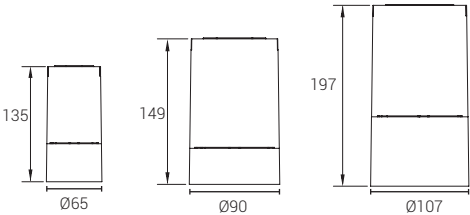

型号 /Model Code	L05393	L05394	L05395
功率 /Power	6W	12W	20W
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ65x135mm	Φ90x149mm	Φ107x197mm
眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	倾角：15°	倾角：15°	倾角：15°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h	50000h
防护等级 /IP	IP20	IP20	IP20

NEW

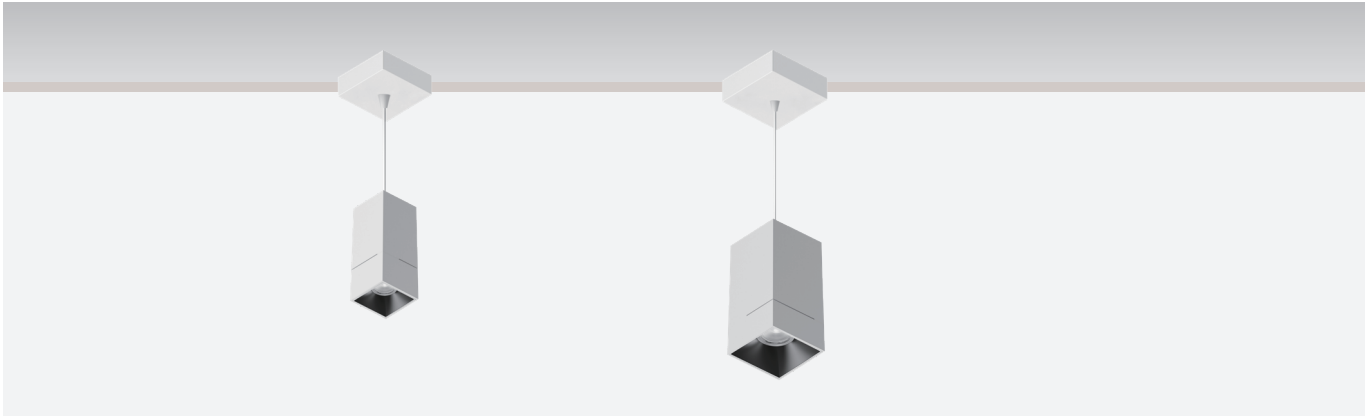

Colour:


Sand gold


Pearl Black


Black



White


Silver


Chrome

Optional :


Honey comb



型号 /Model Code	L05399	L05400
功率 /Power	10W	16W
光源 /Light Source	CREE	CREE
尺寸 /Size(LxWxH)	60x136x1000mm	78x150x1000mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/ 24°/ 38°/ 55°	12°/ 24°/ 38°/ 55°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000h	50000h
防护等级 /IP	IP20	IP20

Nice 耐斯系列




NICE

耐斯系列







- 压铸铝灯身，有效防腐防锈，使灯体充分散热，提高散热效率。
- 提供两种光学结构：固定直照 / 可调斜照。
- 配有极窄的光束角度，可以从不同角度精准的照射到被照物。

- Die-cast aluminium lamp body can effectively prevent corrosion and rust, make the lamp body fully heat dissipation, improve heat dissipation efficiency.
- Two optical structures: fixed direct/adjustable oblique.
- Equipped with an extremely narrow beam Angle, can be from different angles to accurately illuminate the subject.


Aesthetics



大理石 /Marble



木纹色 /Wood

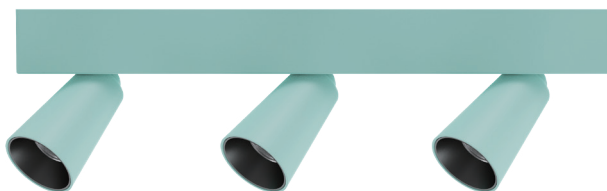

碧水蓝 /Aqua blue(P 331)



爱马仕橙 /Hermes orange(P 1585)



质感之作


运用经典且令人赏心悦目的现代美学，除了经典黑白，还推出四种特别配色——大理石、木纹、爱马仕橙、碧水蓝。

光滑、触感极佳的哑光涂层，让灯具极具质感。

Utilizing classic and pleasing modern aesthetics, in addition to classic black and white, four special color schemes are also introduced - marble, wood, Hermes orange, and aqua blue. The smooth and tactile matte coating gives the lamp a great texture.




木纹色 /Wood

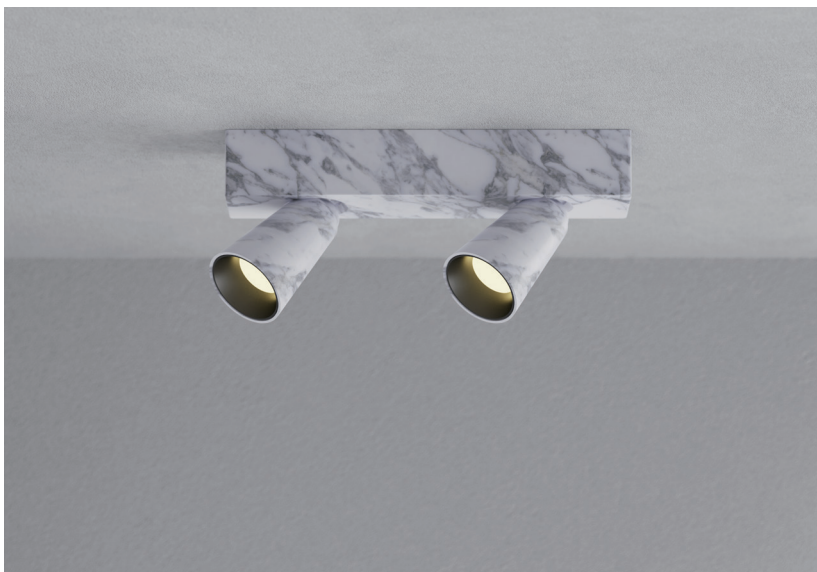

大理石 /Marble



碧水蓝 /Aqua blue(P 331)

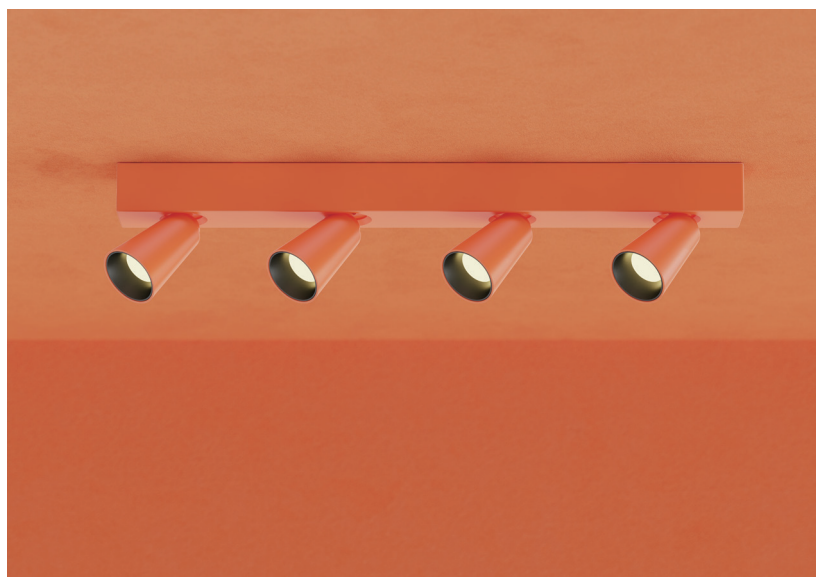

爱马仕橙 /Hermes orange(P 1585)



Colour:



White



Black




Gold



Chrome



Silver



Optional :




Honey comb




Stripe

型号 Model Code	L05401	L05402
功率 Power	5W	2x5W
安装方式 Installation	明装	明装
光源 Light Source	CREE	CREE
尺寸 Size(DxH)	Φ40x60mm	Φ40x60mm
电源盒 Electrical box	32x38x160mm	32x38x190mm
眩光值 UGR	<19	<19
显色指数 CRI	≥80/≥90	≥80/≥90
光束角 Beam angle	15°/ 24°/ 38°	15°/ 24°/ 38°
色温 CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 Life time	50000 h	50000 h
防护等级 IP	IP20	IP20

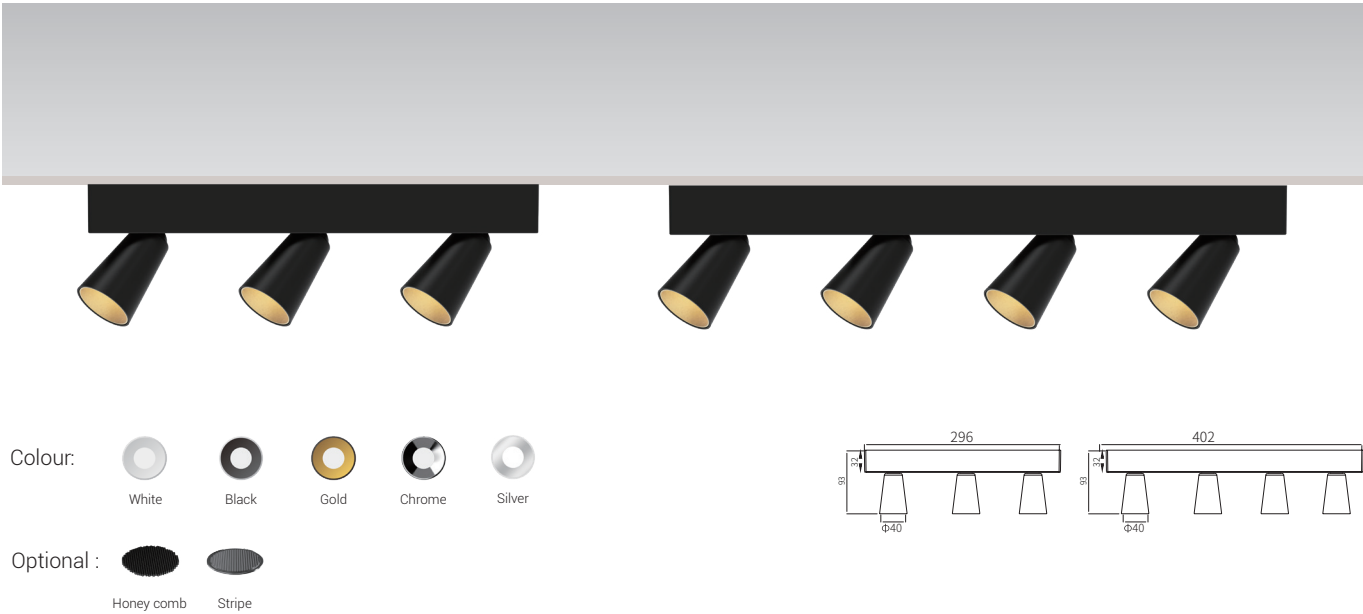

型号 Model Code	L05403	L05404
功率 Power	3x5W	4x5W
安装方式 Installation	明装	明装
光源 Light Source	CREE	CREE
尺寸 Size(DxH)	Φ40x60mm	Φ40x60mm
电源盒 Electrical box	32x38x296mm	32x38x402mm
眩光值 UGR	<19	<19
显色指数 CRI	≥80/≥90	≥80/≥90
光束角 Beam angle	15°/ 24°/ 38°	15°/ 24°/ 38°
色温 CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 Life time	50000 h	50000 h
防护等级 IP	IP20	IP20

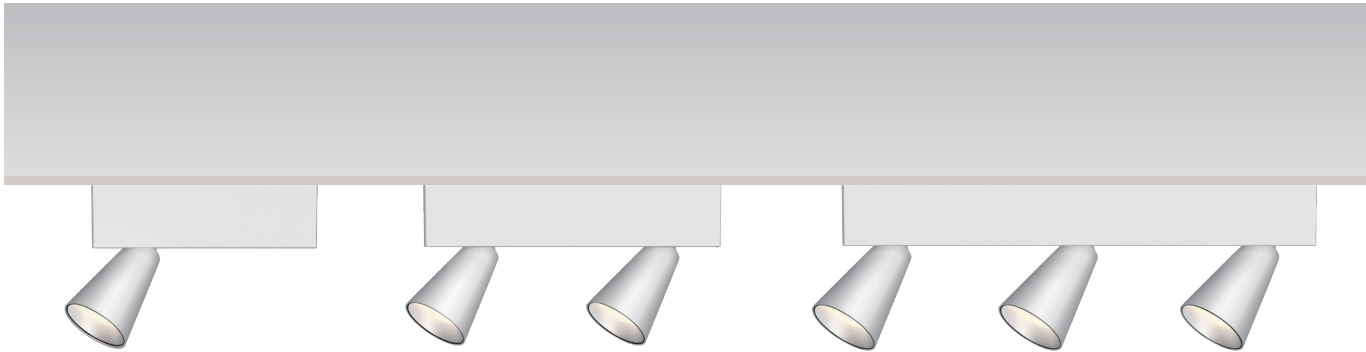

Colour:



White



Black



Gold



Chrome



Silver




Optional :



Honey comb




Stripe



型号 Model Code	L05405	L05406	L05407
功率 Power	10W	2x10W	3x10W
安装方式 Installation	明装	明装	明装
光源 Light Source	CREE	CREE	CREE
尺寸 Size(DxH)	Φ57x83mm	Φ57x83mm	Φ57x83mm
电源盒 Electrical box	50x58x190mm	50x58x252mm	50x58x402mm

眩光值 UGR	<19	<19	<19
显色指数 CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 Beam angle	15°/ 24°/ 38°	15°/ 24°/ 38°	15°/ 24°/ 38°

色温 CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 Life time	50000 h	50000 h	50000 h
防护等级 IP	IP20	IP20	IP20

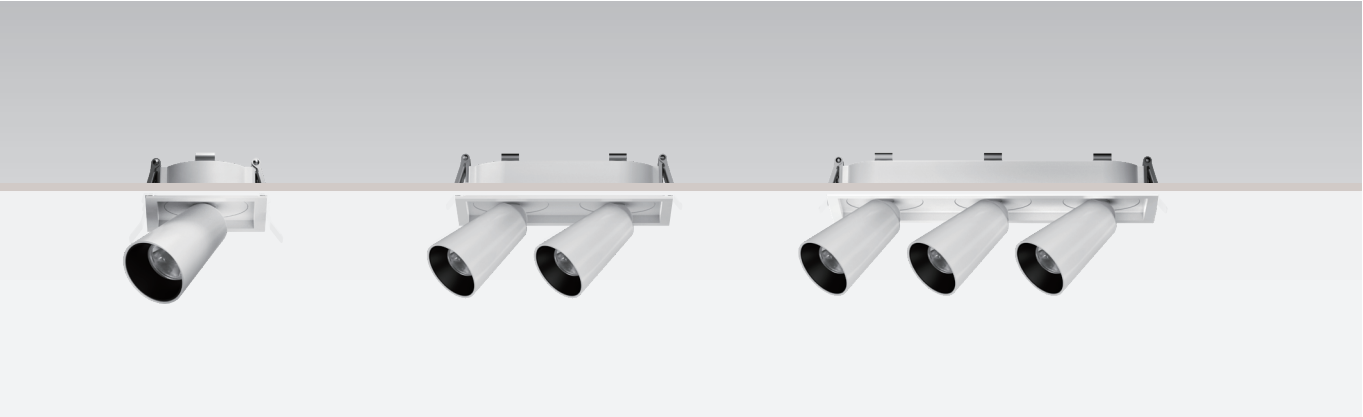

Colour:

 White

 Black

 Gold


 Chrome

 Silver


Optional :

 Honey comb


 Stripe



60X60



128X60




195X60

型号 Model Code	L05408	L05409	L05410
功率 Power	5W	2X5W	3X5W
光源 Light Source	CREE	CREE	CREE
开孔 Cutout	60X60mm	128X60mm	195X60mm
尺寸 Size(DxH)	68X68X96mm	135X68X96mm	202X68X96mm

眩光值 UGR	<19	<19	<19
显色指数 CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°

色温 CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 Life time	50000 h	5000 h	5000 h
防护等级 IP	IP20	IP20	IP20

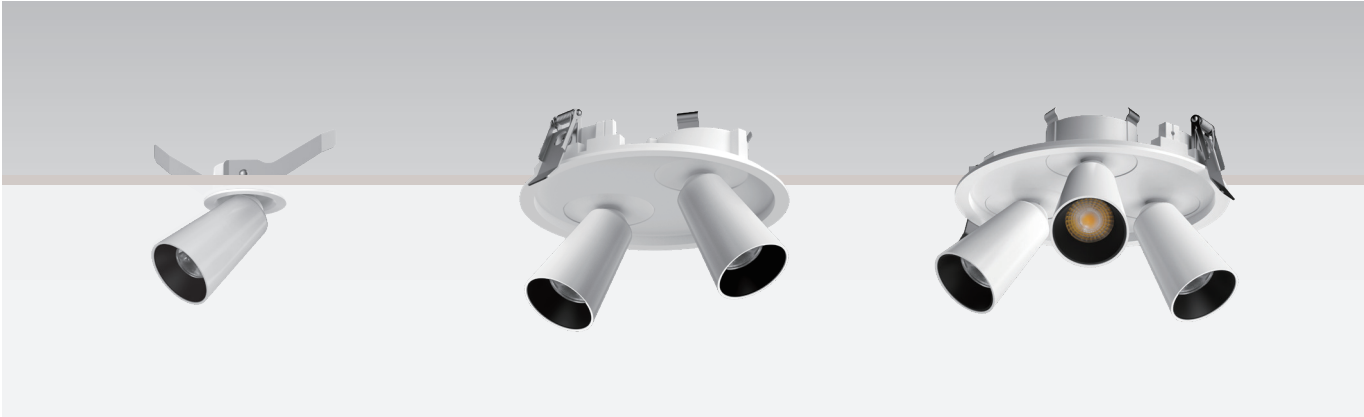

Colour:











White

Black

Gold

Chrome

Silver


Optional :






Honey comb

Stripe

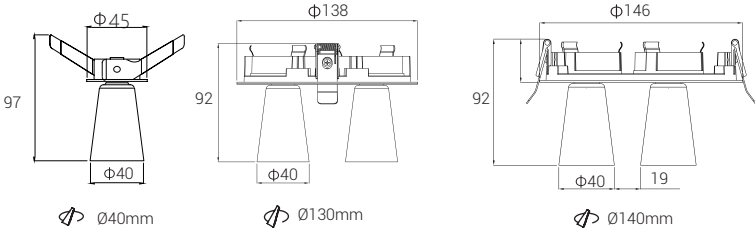

型号 Model Code	L05411	L05412	L05413
功率 Power	5W	2X5W	3X5W
光源 Light Source	CREE	CREE	CREE
开孔 Cutout	Ø40mm	Ø130mm	Ø140mm
尺寸 Size(DxH)	Ø45X97mm	Ø138X92mm	Ø146X92mm
眩光值 UGR	<19	<19	<19
显色指数 CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 Life time	50000 h	50000 h	50000 h
防护等级 IP	IP20	IP20	IP20

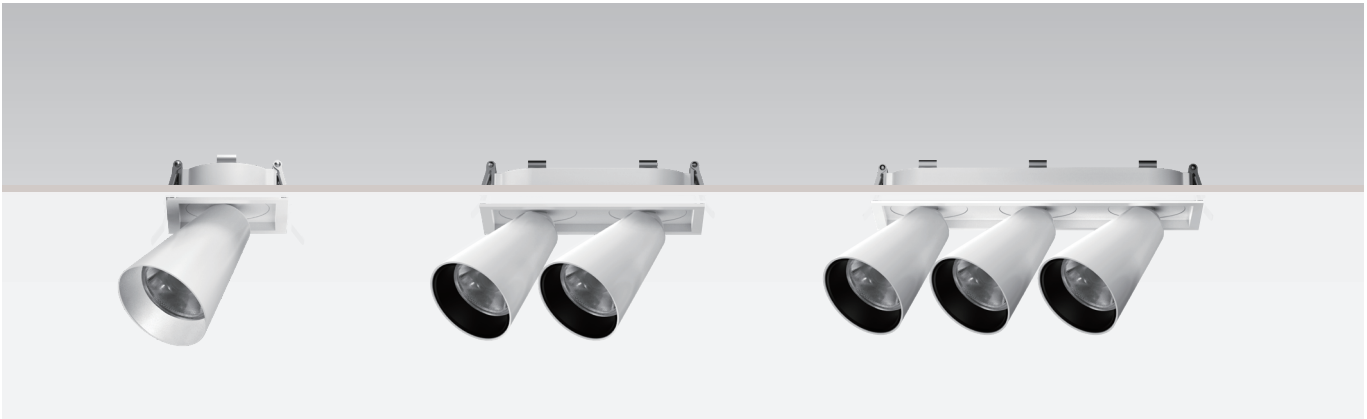

Colour:

White

Black

Gold


Chrome

Silver

Optional :

Honey comb

Stripe

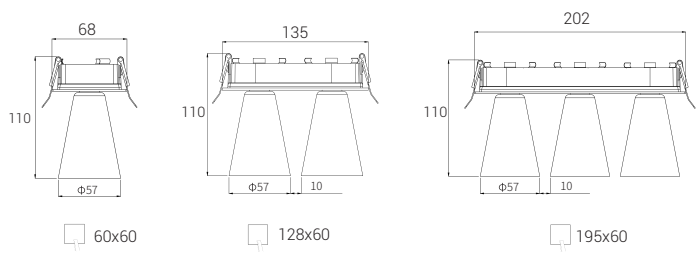

型号 Model Code	L05414	L05415	L05416
功率 Power	10W	2X10W	3X10W
光源 Light Source	CREE	CREE	CREE
开孔 Cutout	60X60mm	128X60mm	195X60mm
尺寸 Size(DxH)	68X68X110mm	135X68x110mm	202X68x110mm
眩光值 UGR	<19	<19	<19
显色指数 CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°
色温 CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 Life time	50000 h	50000 h	50000 h
防护等级 IP	IP20	IP20	IP20




Colour:

White Black Gold Chrome Silver

Optional :


Honey comb Stripe

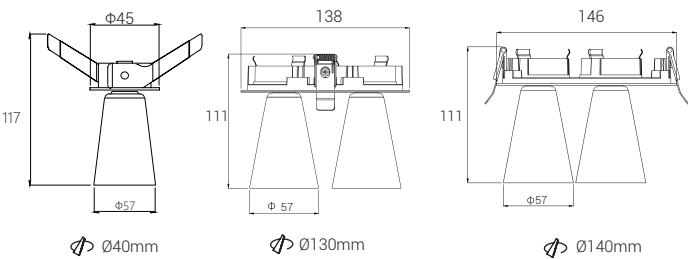

型号 Model Code	L05417	L05418	L05419
功率 Power	10W	2X10W	3X10W
光源 Light Source	CREE	CREE	CREE
开孔 Cutout	Ø40mm	Ø130mm	Ø140mm
尺寸 Size(DxH)	Ø45X117mm	Ø138X111mm	Ø146X111mm


眩光值 UGR	<19	<19	<19
显色指数 CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°

色温 CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 Life time	50000 h	50000 h	50000 h
防护等级 IP	IP20	IP20	IP20

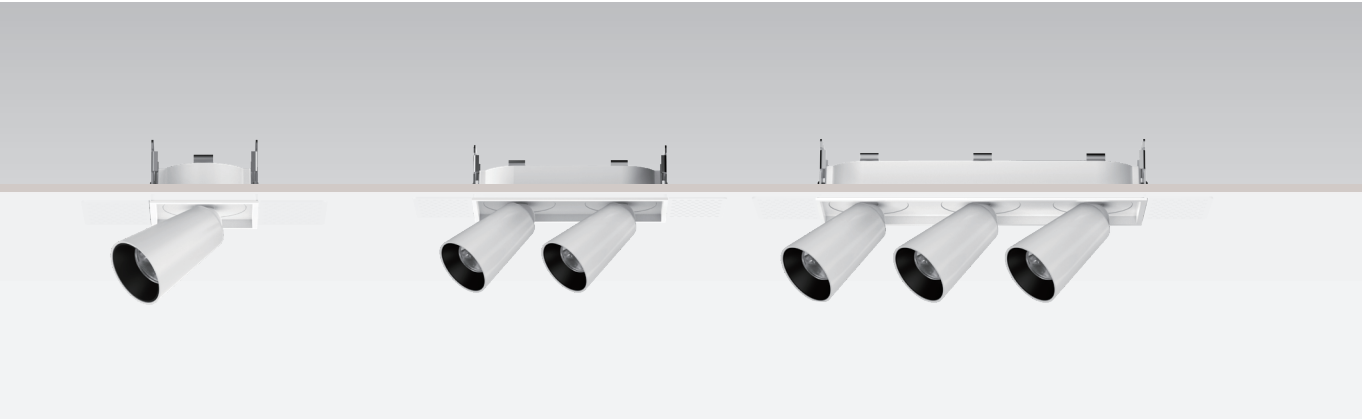


Colour:  White  Black  Gold  Chrome  Silver


Optional :  Honey comb  Stripe



65X65



133X65




200X65

型号 Model Code	L05420	L05421	L05422
功率 Power	5W	2X5W	3X5W
光源 Light Source	CREE	CREE	CREE
开孔 Cutout	65X65mm	133X65mm	200X65mm
尺寸 Size(DxH)	138X60X105mm	205X60X105mm	272X60X105mm

眩光值 UGR	<19	<19	<19
显色指数 CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 Beam angle	15°/24°/38°	15°/24°/38°	15°/24°/38°

色温 CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 Life time	50000 h	50000 h	50000 h
防护等级 IP	IP20	IP20	IP20


Lina 拉伸系列

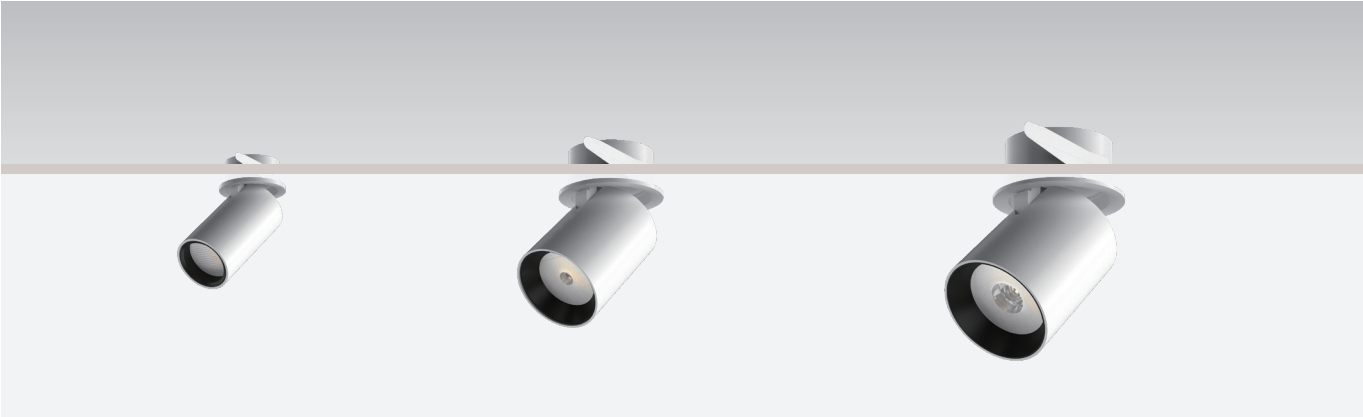

Colour:



Optional :

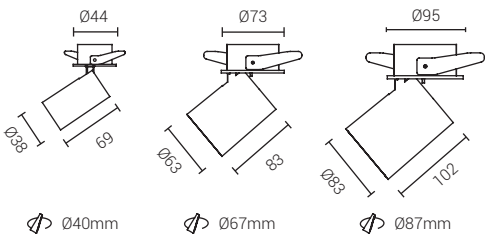

型号 /Model Code	L05423	L05424	L05425
功率 /Power	6W	12W	25W
开孔 /Cut out	Φ40mm	Φ67mm	Φ87mm
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ44xΦ38x102mm	Φ73x118mm	Φ95x135 mm

眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°


色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20



Colour:



Optional :

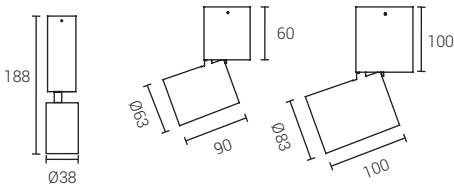


LS3003R40 / LS3003R65 / LS3003R85

型号 /Model Code	L05426	L05427	L05428
功率 /Power	6W	12W	25W
开孔 /Cut out	明装式	明装式	明装式
光源 /Light Source	CREE	CREE	CREE
尺寸 /Size(DxH)	Φ38x188mm	Φ63x151mm	Φ83x201mm

眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20

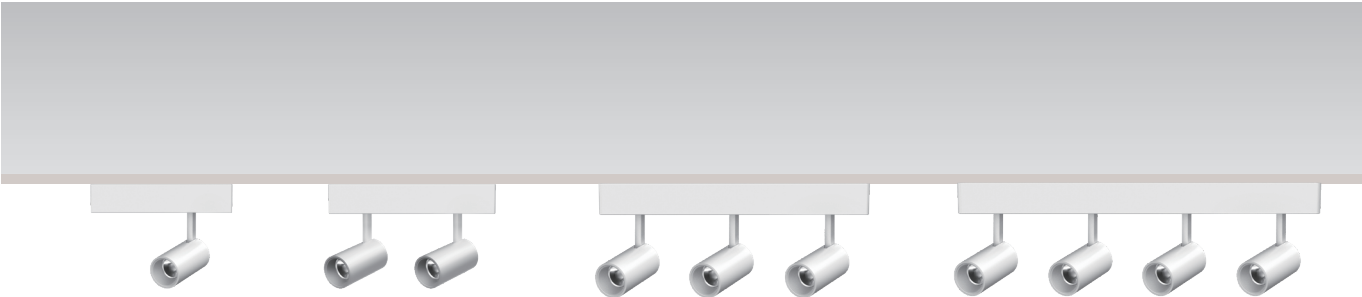

Colour:



White



Black







Gold



Chrome



Silver




型号 /Model Code	L05429	L05430	L05431	L05432
功率 /Power	6W	2x6W	3x6W	4x6W
安装方式 /Installation	明装式	明装式	明装式	明装式
光源 /Light Source	CREE	CREE	CREE	CREE
灯体尺寸 /Size(DxH)	Φ38x68mm	Φ38x68mm	Φ38x68mm	Φ38x68mm
电源盒 /Size(DxH)	32x38x160mm	32x38x204mm	32x38x310mm	32x38x416mm

眩光值 /UGR	<19	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°	12°/24°/38°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20	IP20

Lina 拉伸系列

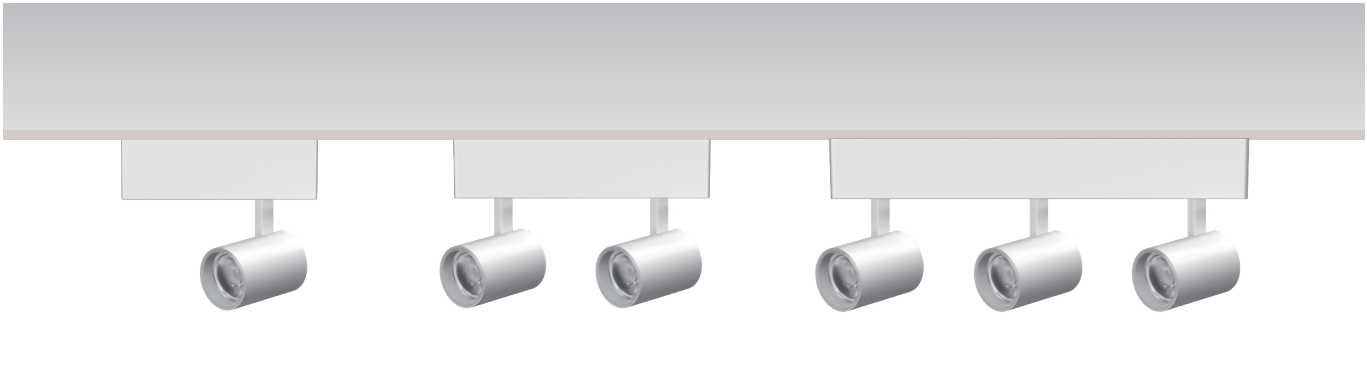

Colour:



White



Black






Gold



Chrome



Silver



型号 /Model Code	L05433	L05434	L05435
功率 /Power	12W	2x12W	3x12W
安装方式 /Installation	明装式	明装式	明装式
光源 /Light Source	CREE	CREE	CREE
灯体尺寸 /Size(DxH)	Φ63x83mm	Φ63x83mm	Φ63x83mm
电源盒 /Size(DxH)	50x58x190mm	50x58x252mm	50x58x402mm

眩光值 /UGR	<19	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90	≥80/≥90
光束角 /Beam angle	12°/24°/38°	12°/24°/38°	12°/24°/38°

色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h	50000 h
防护等级 /IP	IP20	IP20	IP20



1004 系列



- Die-cast aluminium lamp body can effectively prevent corrosion and rust, make the lamp body fully heat dissipation, improve heat dissipation efficiency.
- It can be used as IP43 anti-fog and prevent fog and spray from contacting light source. It is suitable for kitchen and toilet.
- Two optical structures: fixed direct/adjustable oblique.
- Equipped with an extremely narrow beam Angle, can be from different angles to accurately illuminate the subject.
- 压铸铝灯身，有效防腐防锈，使灯体充分散热，提高散热效率。
- 可做 IP43 防雾，防止雾气水花接触光源，适合厨房、卫生间使用。
- 提供两种光学结构：
- 配有极窄的光束角度，可以从不同角度精准的照射到被照物。



Anti-glare spotlight

The unique ultra-thin shell is flexible to use in the limited space of the ceiling, thus reducing the construction difficulty. In addition, luminous surface no dark area, no point of light, uniform degree of highly consistent light effect, is Simple large space to provide basic lighting preferred products.

该系列独有的超薄壳体设计使其在空间有限的天花内部也能灵活使用，从而减小施工难度。此外，发光面无暗区，无光点，均匀度高度一致的光出光效果，是为简单大空间提供基础照明的首选产品。

- [1] The maximum lamp body of 16° can adjust the Angle, which greatly facilitates the lighting needs of on-site debugging.

16°的最大灯体可调节角度，极大便利了现场调试灯光需求

- [2] Can be combined with honeycomb grid, effectively prevent excess astigmatism.

可搭配蜂窝网格，有效阻止多余的散光


- [3] Reflectors of different colors can be selected according to the ceiling and the overall color of the space.

可根据天花和空间整体色彩选用不同颜色的反射器




Colour :    
Sand gold Black Silver Chrome

Optional : 
Honey comb

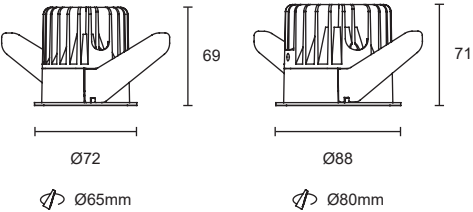

型号 /Model Code	L05436	L05437
功率 /Power	10W	15W
开孔 /Cut out	Φ65mm	Φ80mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ72x69mm	Φ88x71mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°	15°/24°/36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h
防护等级 /IP	IP20	IP20

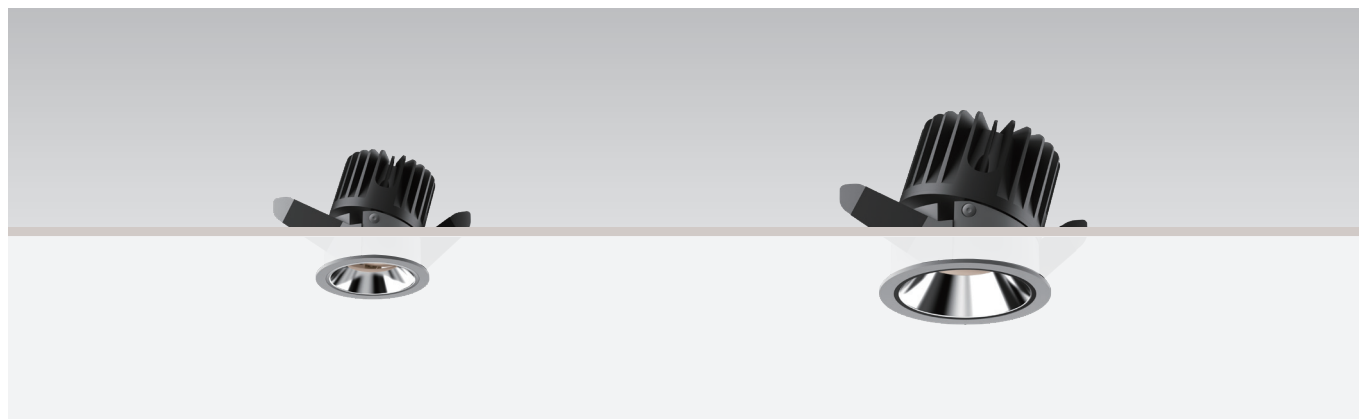

Colour :



Sand gold



Black



Silver





Chrome

Optional :




Honey comb

**XQ1004A**



型号 /Model Code	L05438	L05439
功率 /Power	10W	15W
开孔 /Cut out	Φ65mm	Φ80mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ72x78mm	Φ88x88mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/24°/36°	15°/24°/36°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h
防护等级 /IP	IP20	IP20

1007 系列



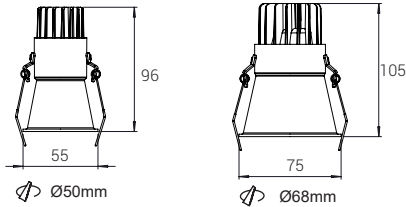

型号 /Model Code	L05440	L05441
功率 /Power	5W	10W
开孔 /Cut out	Φ50mm	Φ68mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ55x96mm	Φ75x105mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h
防护等级 /IP	IP20	IP20



型号 /Model Code	L05442	L05443
功率 /Power	15W	20W
开孔 /Cut out	Φ82mm	Φ118mm
光源 /Light Source	CREE	CREE
尺寸 /Size(DxH)	Φ91x120mm	Φ128x127mm
眩光值 /UGR	<19	<19
显色指数 /CRI	≥80/≥90	≥80/≥90
光束角 /Beam angle	15°/ 24°/38°	15°/24°/38°
色温 /CCT	2700K/3000K/4000K/5000K	2700K/3000K/4000K/5000K
寿命 /Life time	50000 h	50000 h
防护等级 /IP	IP20	IP20



Parker 派克系列

EU:ERP>120lm/W
UGR<9

化繁为简, 重塑经典

Simplify and reinvent the classic

派克灯体采用一体化设计, 安装简便, 并且在同等的开孔尺寸前提下, 功率做的更大。
可制作 IP44 防水以及加蜂窝网, 主要应用于直照场景。

Parker series adopts integrated design, it's easy to install,
and the power is larger under the premise of the same size. IP44 waterproof and honeycomb can be customized, mainly for
direct lighting scenes.

6 种开孔尺寸

Six size of cut hole



透镜款 /Lens: 6W
反光杯款 /Reflector: 7W



透镜款 /Lens: 8W
反光杯款 /Reflector: 10W



透镜款 /Lens: 10W
反光杯款 /Reflector: 13W




透镜款 /Lens: 12W
反光杯款 /Reflector: 18W



透镜款 /Lens: 20W
反光杯款 /Reflector: 25W



透镜款 /Lens: 36W
反光杯款 /Reflector: 40W

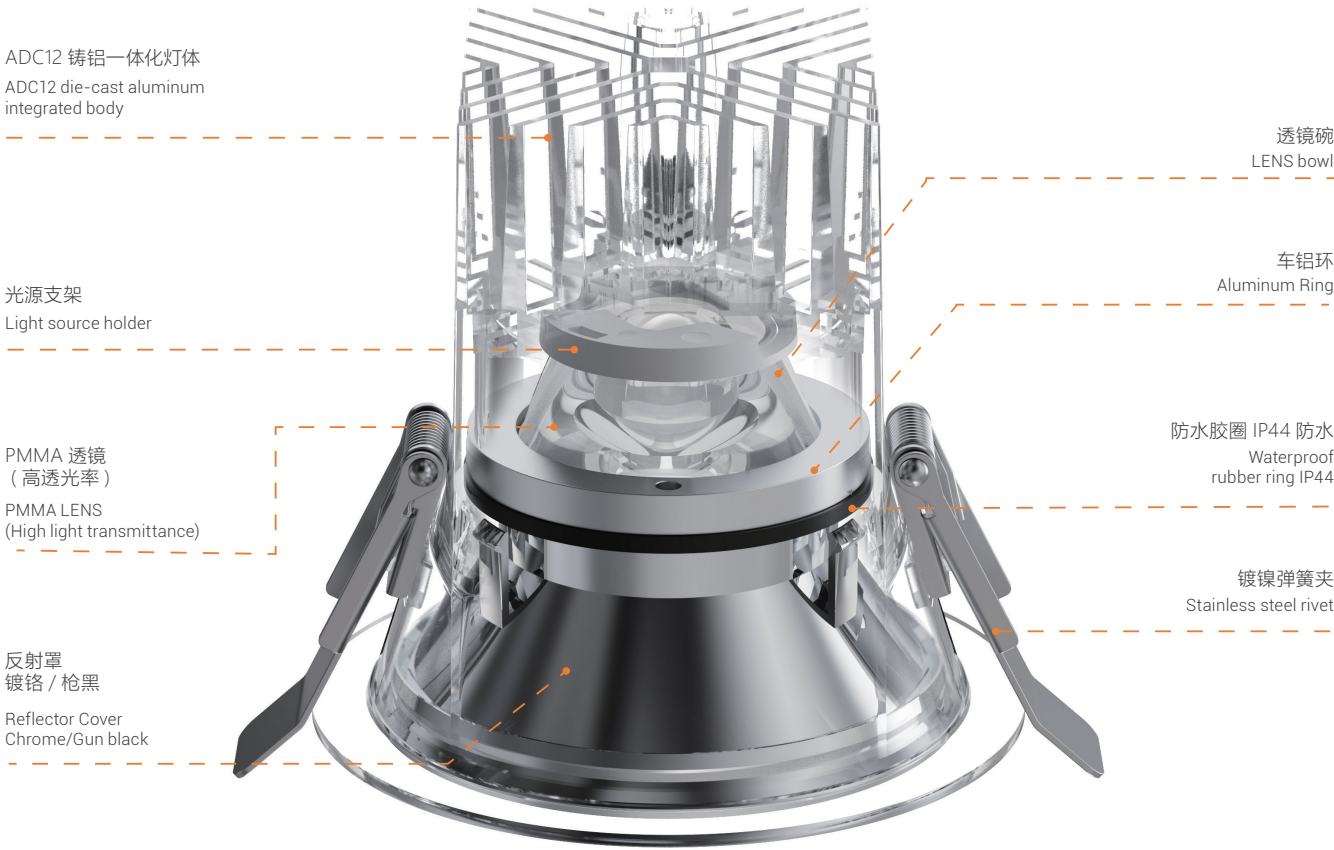





方圆有度

Square and Round design



外型简洁利落，塑造个性轮廓，形塑先锋格调


Simple and neat appearance, Create a personal profile
and a pioneering style



极窄边设计

Extremely narrow edge design

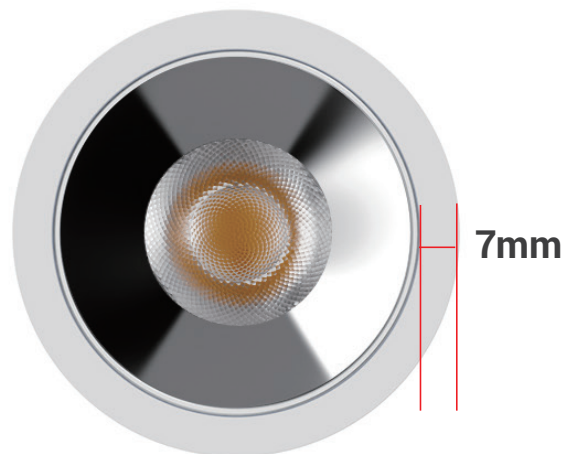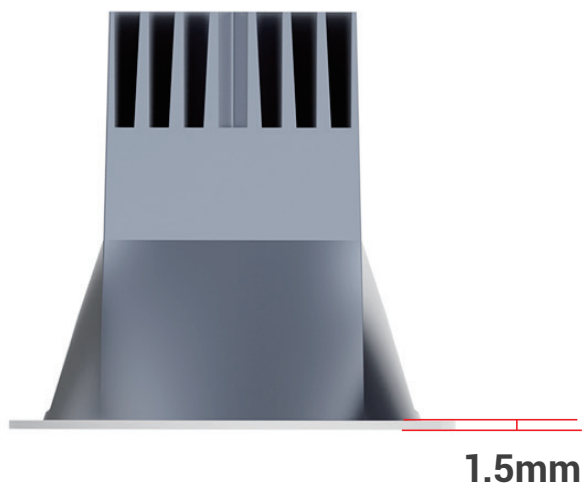

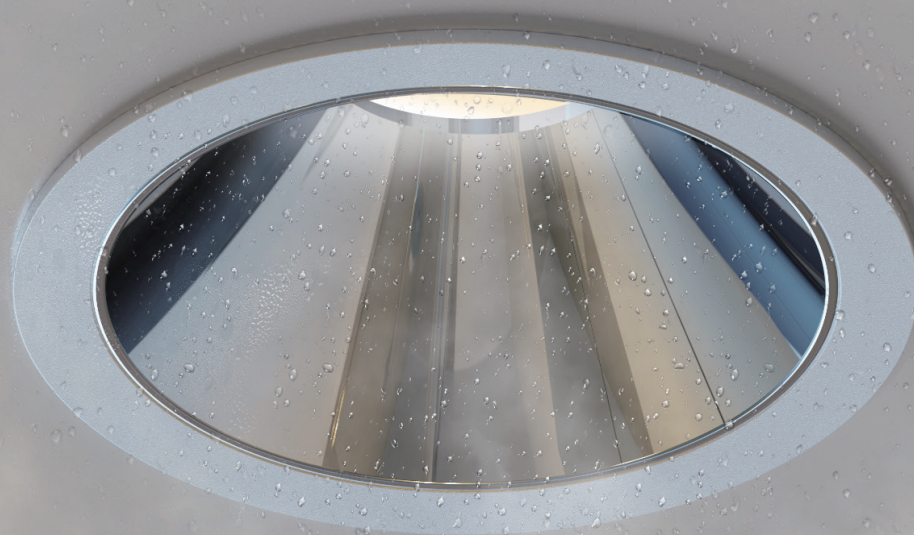


IP44 防尘防水雾

IP44 Dustproof and waterproof

IP44 防水等级, 适用于浴室等潮湿的空间

IP44 Suitable for wet spaces such as bathrooms



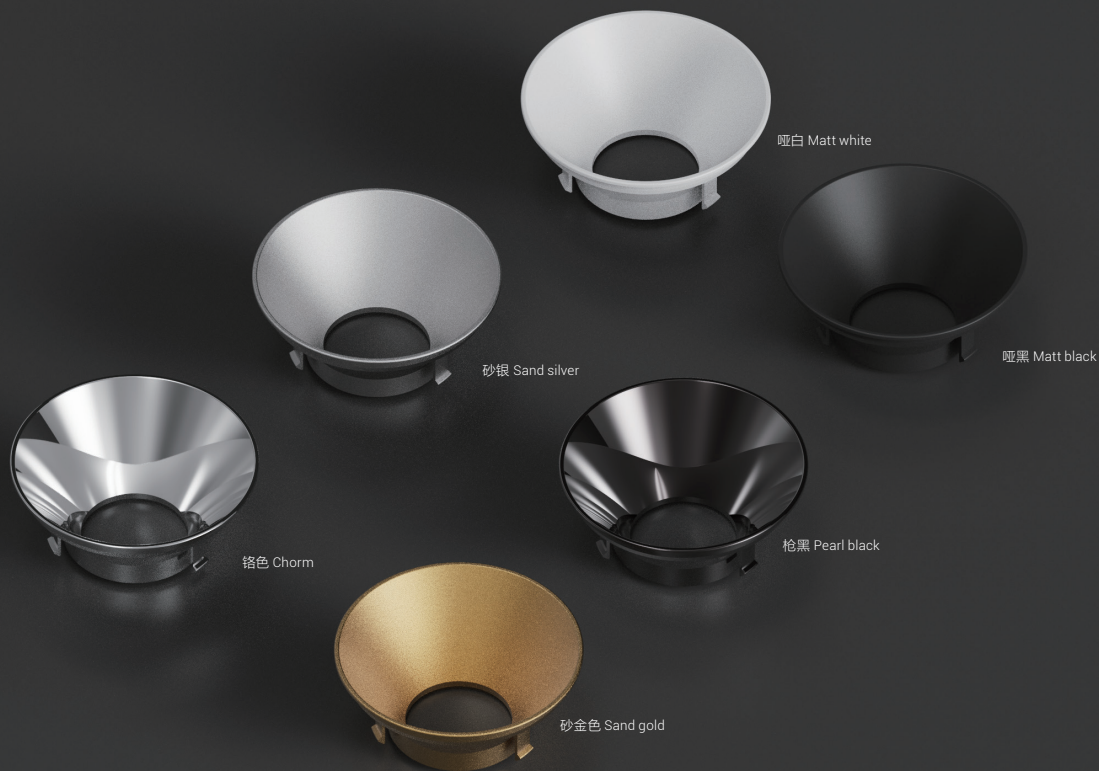


6 色可选 无惧风格搭配

反射罩经过精密设计、
采用电镀以及纳米喷漆技术, 适用不同软装装饰环境

**Available in 6 colors, Suitable for different
decoration environments**

The reflector is precisely designed with electroplating (anti UV) and
nano paint technology, which is suitable for different soft decoration environments

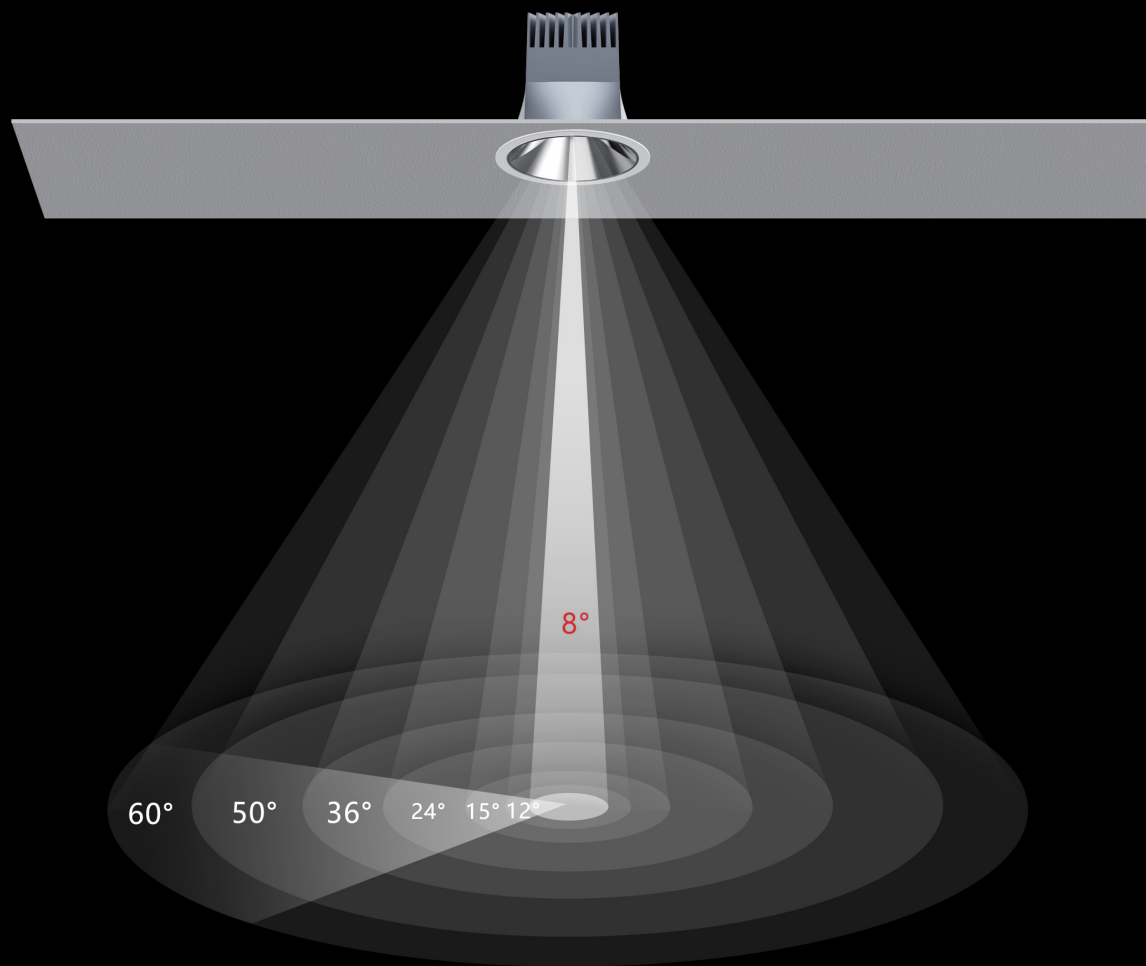


8°~60° 光束角

8°极窄光、12°、15°、24°、36°、50°、60°，
营造多种空间艺术氛围

8° extremely narrow light,

12°, 15°, 24°, 36°, 50°, 60° Creating a variety of space art atmosphere

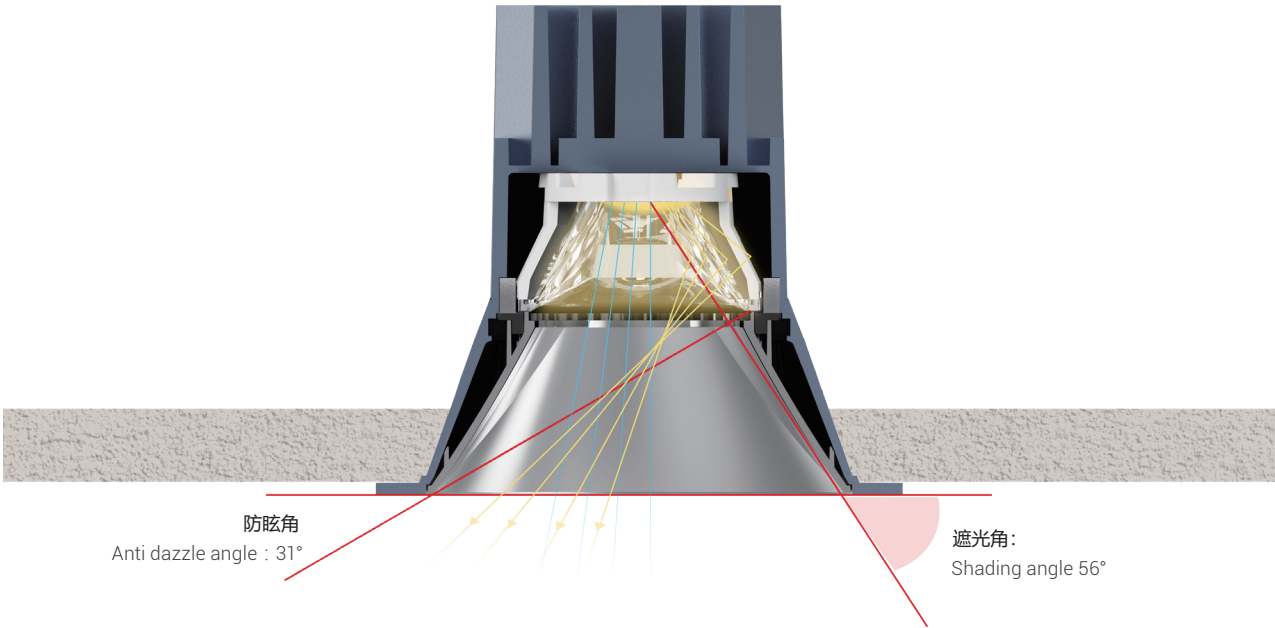


PMMA 高出光率 棱纹结构透镜

PMMA high luminous rate ,Ribbed structure Lens

透镜采用棱纹结构设计，自带防眩效果，让光线交织在反射光罩上端的中心点处，有效减少杂光，光斑过渡均匀，更柔和舒适

The ribbed structure design is adopted, with its own anti glare effect, so that the light is interwoven at the center of the upper end of the reflector, effectively reducing stray light, and the light spot transition is even, more soft and comfortable.



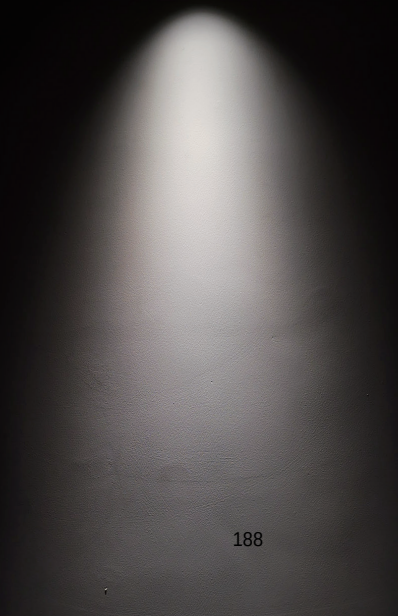



无杂散光 圆润光斑

无副光斑，纯净清晰，光斑过渡均匀，更柔和舒适

No stray light, round spot

No secondary light spot, pure and clear
Uniform light spot transition, more soft and comfortable

透镜光斑效果 /Light spot effect

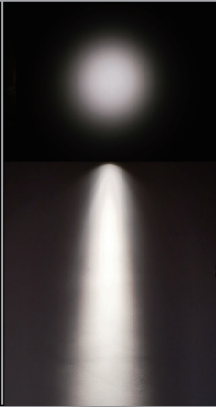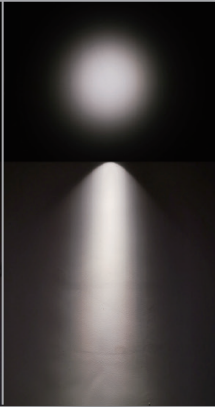8°	10°	15°	24°	36°	50°
					


NEW



L05157

6/7W | Ø45mm


- 尺寸 / Size(DxH): Ø52.5X55mm
功率 / Power: 6W(透镜款)
功率 / Power: 7W(反光杯款)
开孔 / Cutout: Ø45mm
光束角 / Beam angle: 15°/24°/36°
标配支架 / Standard holder: CREE 1304
选配支架 / Optional holder: LUMINUS CXM-4 /6



L05158

8/10W | Ø55mm


- 尺寸 / Size(DxH): Ø65X60mm
功率 / Power: 8W(透镜款)
功率 / Power: 10W(反光杯款)
开孔 / Cutout: Ø55mm
光束角 / Beam angle: 8°/12°/15°/24°/36°/50°/60°
标配支架 / Standard holder: CREE 1304
选配支架 / Optional holder: CREE 1507 LUMINUS CXM-6



L05159

10/13W | Ø65mm

- 尺寸 / Size(DxH): Ø75X70mm
功率 / Power: 10W(透镜款)
功率 / Power: 13W(反光杯款)
开孔 / Cutout: Ø65mm
光束角 / Beam angle: 8°/12°/15°/24°/36°/50°/60°
标配支架 / Standard holder: CREE 1304
选配支架 / Optional holder: CREE 1306 LUMINUS CXM-6



Reflector cover:



Optional:




NEW



L05160

12/18W | Ø75mm


- 尺寸 / Size(DxH): Ø85X80mm
功率 / Power: 12W(透镜款)
功率 / Power: 18W(反光杯款)
开孔 / Cutout: Ø75mm
光束角 / Beam angle: 8°/12°/15°/24°/36°/50°/60°
标配支架 / Standard holder: CREE 1507
选配支架 / Optional holder: CREE 1304 LUMINUS CXM-6~10



L05161

20/25W | Ø95mm


- 尺寸 / Size(DxH): Ø106X100mm
功率 / Power: 20W(透镜款)
功率 / Power: 25W(反光杯款)
开孔 / Cutout: Ø95mm
光束角 / Beam angle: 8°/12°/15°/24°/36°/50°/60°
标配支架 / Standard holder: CREE 1507
选配支架 / Optional holder: LUMINUS CXM-10~17



L05162

36/40W | Ø120mm

- 尺寸 / Size(DxH): Ø135X124mm
功率 / Power: 36W(透镜款)
功率 / Power: 40W(反光杯款)
开孔 / Cutout: Ø120mm
光束角 / Beam angle: 8°/12°/15°/24°/36°/50°/60°
标配支架 / Standard holder: CREE 1917
选配支架 / Optional holder: CREE 1830 LUMINUS CXM-14~23




Reflector cover:




Optional:



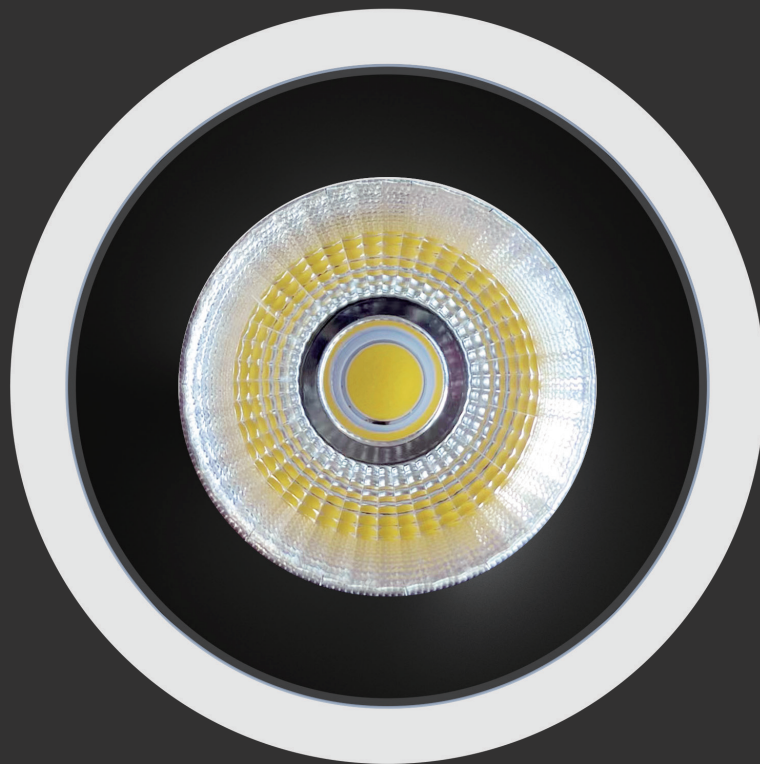

PARKER

派克高流明系列

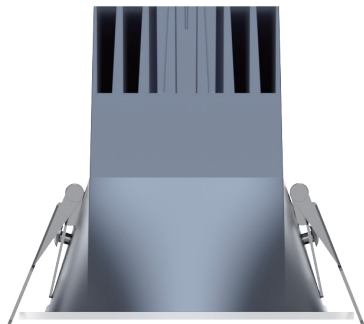


EU,ERP :140lm/W
UGR<9

高流明 - 安铝杯
Hight lumen-Alanod reflecto

本系列产品旨在为追求高品质光斑和效率的客户而设计。
派克系列采用一体化设计，安装方便，在同等尺寸的前提下功率更大。
采用德国安铝杯，高光效，流明可达 140m/W，蜂窝状可定制，主要用于直接照明场景。

This Series is designed for customers who demand high-quality light spots and efficiency.
Parker series adopts integrated design, it's easy to install, and the power is larger under the premise of the same size. The use of German aluminum cup, High luminous efficiency of 140lm/W, honeycomb can be customized, mainly for direct lighting scenes.

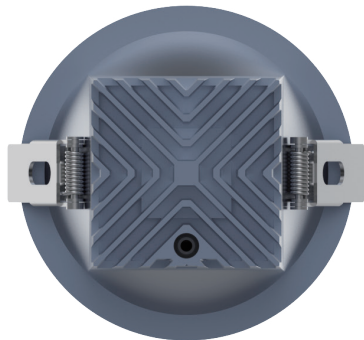

Energy Efficiency Class	Total main efficacy $\eta_{TM}(lm/W)$
A	$210 \leq \eta_{TM}$
B	$185 \leq \eta_{TM} < 210$
C	$160 \leq \eta_{TM} < 185$
D	$135 \leq \eta_{TM} < 160$
E	$110 \leq \eta_{TM} < 135$
F	$85 \leq \eta_{TM} < 110$
G	$\eta_{TM} < 85$



L05163

Power:10W



L05164

Power:15W



L05165

Power:25W



L05166

Power:38W

- 1. **一体化设计:** 一体式灯体设计, 安装方便, 在同等尺寸下功率更大;
- 2. **方圆设计:** 外观简洁大方, 打造个性化和前卫风格;
- 3. **极窄设计:** 面环边缘宽度 7mm, 厚度 1.5mm;
- 4. **高光效设计:** 138-159lm/W, 开孔 95 可达 25W, 开孔 120 可达 38W;
- 5. **自然光斑:** 光线柔和, 过渡均匀, 无分层; 控制精准;
- 6. **主要用于直照场景:** 酒店、商场、餐厅等;
- 7. **蜂窝网可定制。**

- 1. Adopts integrated design, it's easy to install, and the power is larger under the premise of the same size;
- 2. Square and Round design, Simple and neat appearance, Create a personal profile and a pioneering style;
- 3. Extremely narrow edge design, Face ring edge width 7mm, thickness 1.5mm;
- 4. High luminous efficiency of 138-159lm/W. 95 size can be up to 25W, 120 size can be up to 38W;
- 5. Natural light spot: soft light, even transition, no delamination; precise control;
- 6. Mainly for direct lighting scenes: hotels, shopping malls, restaurants, etc;
- 7. Honeycomb can be customized.

兼顾效率与光斑

Balancing Even
Illumination & Efficiency



+



99%

反射率
Reflectivity


德国安铝
German Aluminium

混光型镜片:

混光型镜片确保光斑平滑过渡，同时控制目视眩光和光输出效率，搭配光学镜片后整体出光效率为 92%-94%。

MIX LENS:

This diffused light LENS ensures a smooth transition of the light spot, while controlling visual glare and light output efficiency. After pairing with optical lenses, the overall luminous efficacy is 92%-94%.

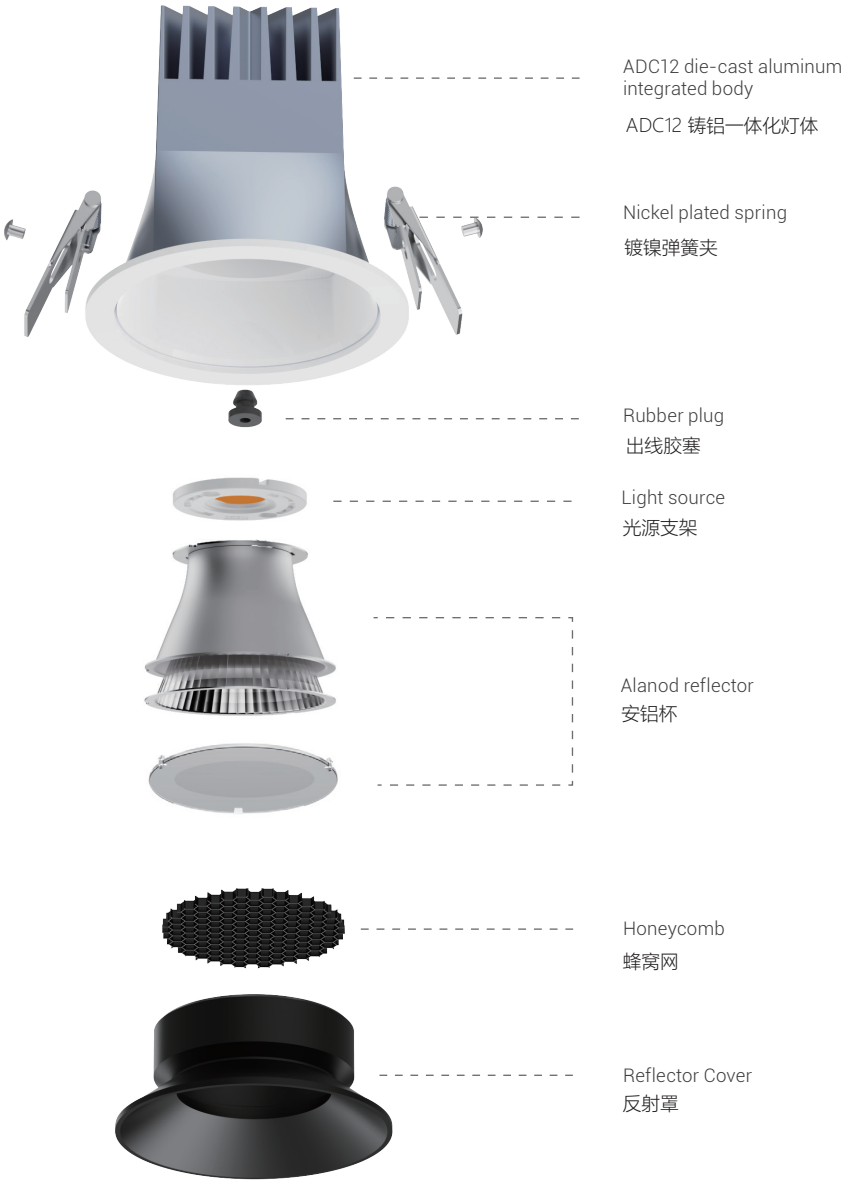



Super comfort optics

超级舒适光学

The new super comfort optics achieve luminance values of $UGR < 14$ and $< 5419 \text{ cd}$ by eliminating glare.

新型超舒适光学元件，通过消除眩光实现 $UGR < 14$ 和 5419 cd 的光强度。

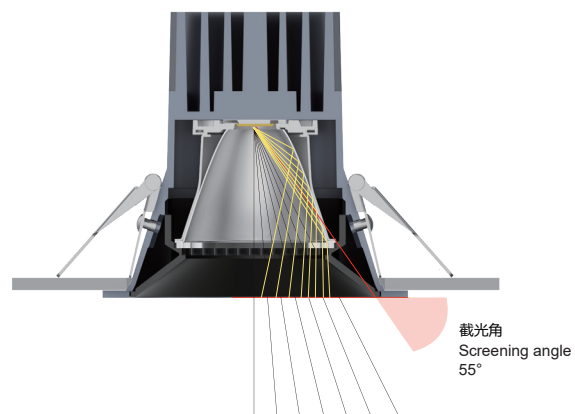

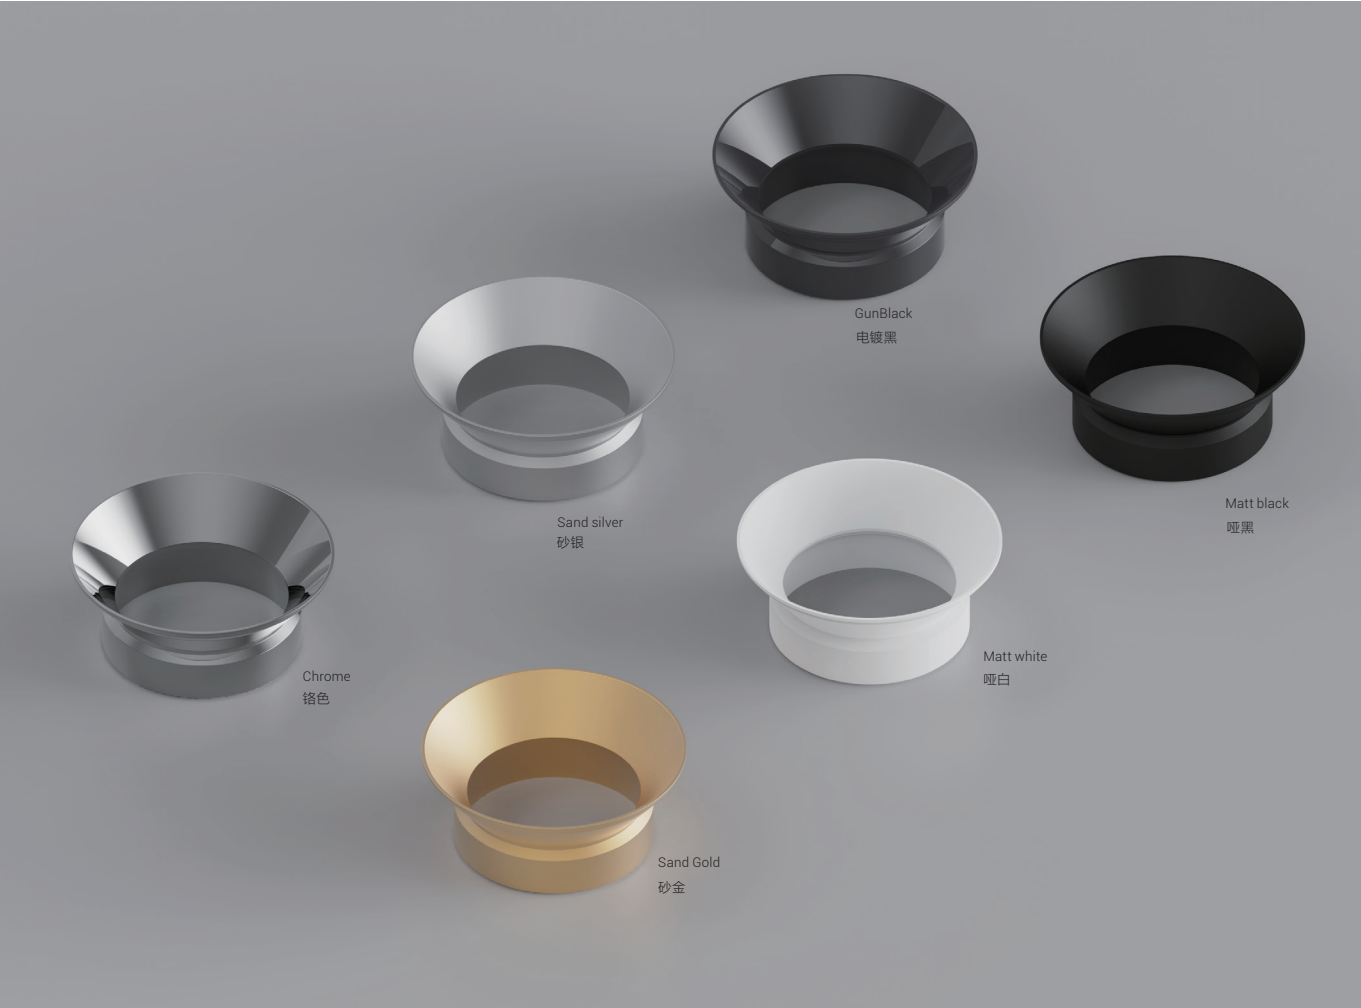

铝杯 Aluminum cup

6 色可选 无惧风格搭配

反射罩经过精密设计，
采用电镀以及纳米喷漆技术，适用不同软装装饰环境

Available in 6 colors
Suitable for different decoration environments

The reflector is precisely designed with electroplating (anti UV) and nano paint technology, which is suitable for different soft decoration environments



IES 测试



L05163




L05164

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.65V I:0.0888A P:10.713W PF:0.5439 Freq:50.00Hz Lamp Flux:1478.45lm		
NAME: PARKER-65	TYPE:	WEIGHT:
SPEC.: 24D	DIM.:	SERIAL No.:1
MFR.:	SUR.:/	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			Eff: 138.01 lm/W
MODEL	Bridgelux VSE-3000K	Imax(cd)	5759	S/MH(C0/180)	0.35
NOMINAL POWER(W)	10	LOR(%)	100.0	S/MH(C90/270)	0.42
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	1478.5	η UP,DN(C0-180)	0.0,50.2
NOMINAL FLUX(lm)	1478.45	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.0,49.8
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE(V)	--	η down(%)	100.0	CIBSE SHR MAX	1.00

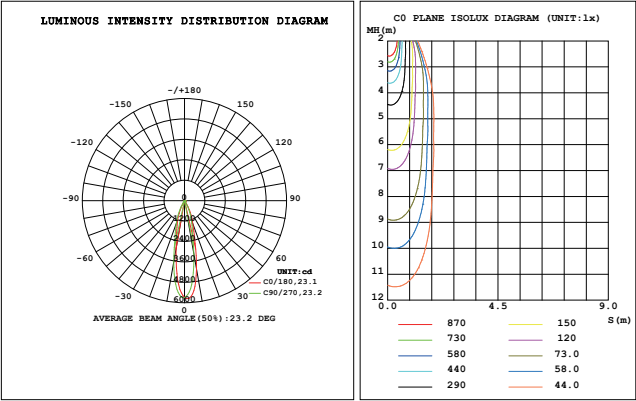


注：测试结果仅供参考

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.31V I:0.1149A P:14.181W PF:0.5577 Freq:50.00Hz Lamp Flux:2134.78lm		
NAME: PARKER-75	TYPE:	WEIGHT:
SPEC.:38D	DIM.:	SERIAL No.:1
MFR.:	SUR.:/	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			Eff: 150.54 lm/W
MODEL	Bridgelux V10B-4000K	Imax(cd)	5419	S/MH(C0/180)	0.58
NOMINAL POWER(W)	15	LOR(%)	100.0	S/MH(C90/270)	0.59
RATED VOLTAGE(V)	220	TOTAL FLUX(lm)	2134.8	η UP,DN(C0-180)	0.8,49.4
NOMINAL FLUX(lm)	2134.78	CIE CLASS	DIRECT	η UP,DN(C180-360)	0.8,49.0
LAMPS INSIDE	1	η up(%)	1.6	CIBSE SHR NOM	0.50
TEST VOLTAGE(V)	--	η down(%)	98.4	CIBSE SHR MAX	0.60

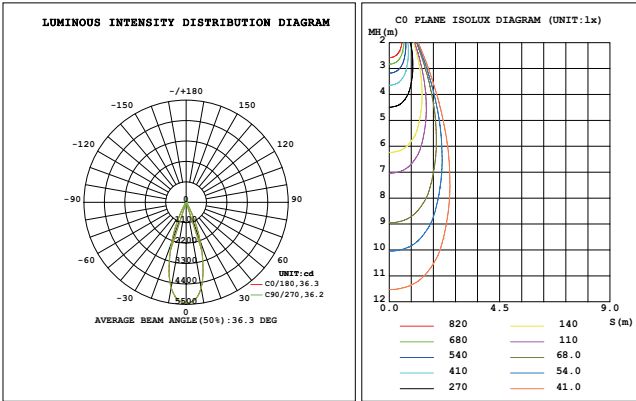

IES 测试



L05165




L05166

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.52V I:0.0928A P:19.838W PF:0.9650 Freq:50.00Hz Lamp Flux:3160.56lm		
NAME: PARKER-95	TYPE:	WEIGHT:
SPEC.:38D	DIM.:	SERIAL No.:1
MFR.:	SUR.:/	Shielding Angle:


DATA OF LAMP		PHOTOMETRIC DATA			Eff: 159.32 lm/W
MODEL	Bridgelux V13B-4000K	Imax(cd)	7073	S/MH (C0/180)	0.64
NOMINAL POWER (W)	20	LOR (%)	100.0	S/MH (C90/270)	0.61
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	3160.6	η UP,DN (C0-180)	0.8,48.0
NOMINAL FLUX (lm)	3160.56	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.8,50.4
LAMPS INSIDE	1	η up (%)	1.6	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	--	η down (%)	98.4	CIBSE SHR MAX	0.65

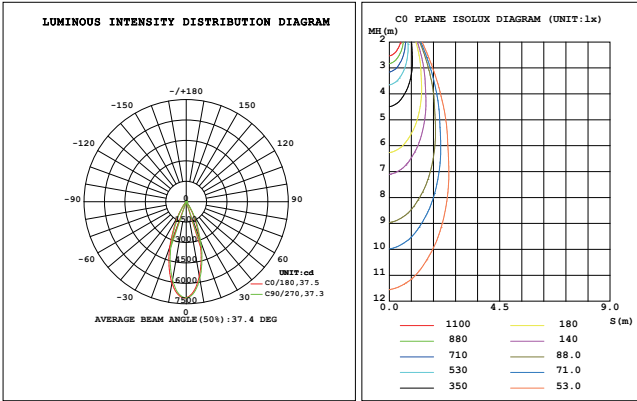

LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:221.56V I:0.1695A P:36.674W PF:0.9765 Freq:50.00Hz Lamp Flux:5081.47lm		
NAME: PARKER-120	TYPE:	WEIGHT:
SPEC.:38D	DIM.:	SERIAL No.:1
MFR.:	SUR.:/	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			Eff: 138.56 lm/W
MODEL	Bridgelux V13B-4000K	Imax(cd)	11731	S/MH (C0/180)	0.65
NOMINAL POWER (W)	36	LOR (%)	100.0	S/MH (C90/270)	0.63
RATED VOLTAGE (V)	220	TOTAL FLUX (lm)	5081.5	η UP,DN (C0-180)	0.8,46.1
NOMINAL FLUX (lm)	5081.47	CIE CLASS	DIRECT	η UP,DN (C180-360)	0.8,52.3
LAMPS INSIDE	1	η up (%)	1.6	CIBSE SHR NOM	0.50
TEST VOLTAGE (V)	--	η down (%)	98.4	CIBSE SHR MAX	0.65

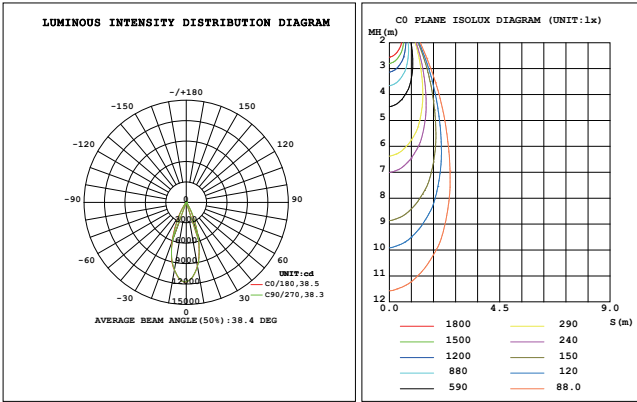

注：测试结果仅供参考

NEW





L05163

定制款


10W |  Ø65mm

尺寸 /Size(WxH):	Ø75X70mm
功率 /Power:	10W
开孔 /Cutout:	Ø65mm
光束角 /Beam angle:	18°/24°/38°/42°
光效 /Eff:	138.01 lm/W
标配支架 /Standard holder:	10mm



配光曲线 /light distribution curve

Beam Angle:24° 3000K





L05164

定制款

15W |  Ø75mm




尺寸 /Size(WxH):	Ø85x80mm
功率 /Power:	15W
开孔 /Cutout:	Ø75mm
光束角 /Beam angle:	18°/24°/38°/42°
光效 /Eff:	150.54 lm/W
标配支架 /Standard holder:	10mm



配光曲线 /light distribution curve

Beam Angle:38° 4000K



Reflector cover:



Optional:



IP20





L05165

定制款

25W | Ø95mm


尺寸 /Size(WxH): Ø106X100mm
 功率 /Power: 25W
 开孔 /Cutout: Ø95mm
 光束角 /Beam angle: 18°/24°/38°/42°
 光效 /Eff: 159.32 lm/W
 标配支架 /Standard holder: 14mm



NEW

配光曲线 /light distribution curve

Beam Angle:38° 4000K





L05166

定制款


38W | Ø120mm

尺寸 /Size(WxH): Ø135x124mm
 功率 /Power: 38W
 开孔 /Cutout: Ø120mm
 光束角 /Beam angle: 18°/24°/38°/42°
 光效 /Eff: 138.56 lm/W
 标配支架 /Standard holder: 14mm



配光曲线 /light distribution curve

Beam Angle:38° 4000K



Reflector cover:



Optional:

