



**R26**

## **LED针织带轨道照明系统**


R26 LED BELT TRACK LIGHTING SYSTEM

## R26 LED针织带轨道照明系统

### R26 LED Belt Track Lighting System

R26 LED针织带轨道照明系统将轨道照明的概念提升到了一个新的水平，它突破了轨道平面铺设的限制，让光设计在立体空间里拥有了无限的可能性，其核心的导电针织带允许自由放置灯具并创建独特的现场照明解决方案。

R26 LED Belt Track Lighting System that takes the concept of the light rail to a new level. No limited to set rails on horizontal plane, but design and create infinite possibility in stereoscopic space. The conductive textile ribbon at its core allows for free placement of the luminaires and the creation of unique light solutions on the spot.

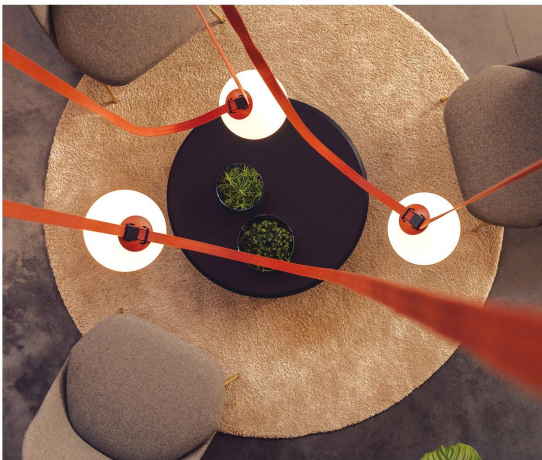

## 灵活安装

可根据需要切割编织带轨道，同时可容纳多个灯具，采用独特的简易插入扣连接，快速安装。编织带提供从拉紧到放松的张力调节，以及按压连接功能，灯具通过锁扣连接到轨道上。

### Easy connection Fix / Click / Connect

Belt can be cutted as needed, accommodates multiple lights and operates with simple plug-in technology for unparalleled ease of installation and connection.

The belt offers adjustments in tension from taut to relaxed as well as click-and-connect functionality, snapping into a buckle attached to each luminaire.


## 01

## 线条泛光灯


Linear diffuser

光线能够高度均匀的照射在水平面，作为底层照明运用在更多实际场景中。在同一平面，照射出的柔和光影不会出现层次分隔。

It provides a high range of uniformity on the horizontal plane, and generates the first layer of illumination on which to add more specific lighting applications. It generates soft shadows and subdued brightness in the space, and its component elements do not display visual hierarchies.

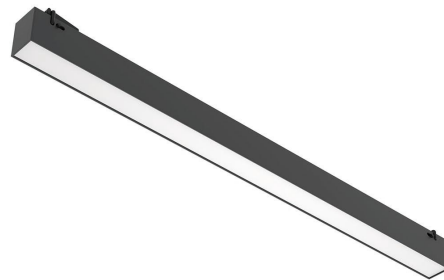


## R26-C0118-320A




|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| LED:             | 10W/ 800LM                |
| CCT:             | 3000K/4000K/tunable white |
| CRI:             | >90                       |
| Beam:            | 110°                      |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

## R26-C0118-640A




|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| LED:             | 20W/ 1600LM               |
| CCT:             | 3000K/4000K/tunable white |
| CRI:             | >90                       |
| Beam:            | 110°                      |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

## R26-C0118-960A



|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| LED:             | 30W/ 2400LM               |
| CCT:             | 3000K/4000K/tunable white |
| CRI:             | >90                       |
| Beam:            | 110°                      |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

## R26-C0118-1280A



|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| LED:             | 40W/ 3200LM               |
| CCT:             | 3000K/4000K/tunable white |
| CRI:             | >90                       |
| Beam:            | 110°                      |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |






## 02


### 线条灯 Linear light

作为工作场所的理想灯饰，亮度适宜，光照形态清晰，其直射、光束延伸和灯具性能等特点给予了高效的灯光性能以及低于19的UGR值。

As an ideal lighting for the workplace, appropriate brightness and clear form with direct lighting, extended beams and high lamp performance gives the light with high energy efficiency and low UGR level below 19

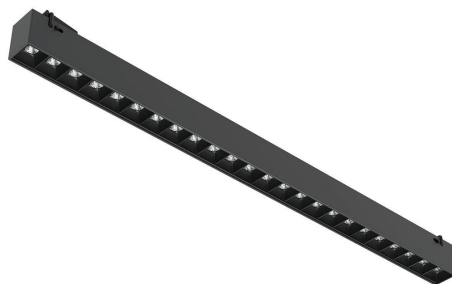


#### R26-C0118-12A




|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| Power:           | 12W/ 960LM                |
| CCT              | 3000K/4000K/tunable white |
| CRI              | >90                       |
| Beam:            | 12°/34°/48°               |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

#### R26-C0118-24A



|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| Power:           | 24W/ 1900LM               |
| CCT              | 3000K/4000K/tunable white |
| CRI              | >90                       |
| Beam:            | 12°/34°/48°               |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

#### R26-C0118-36A



|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| LED:             | 36W/ 2800LM               |
| CCT              | 3000K/4000K/tunable white |
| CRI              | >90                       |
| Beam:            | 12°/34°/48°               |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

#### R26-C0118-48A



|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| LED:             | 48W/ 3800LM               |
| CCT              | 3000K/4000K/tunable white |
| CRI              | >90                       |
| Beam:            | 12°/34°/48°               |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |



## 03

## 偏光线条灯


Polarized Linear light

提供中等亮度和清晰的形态。偏角照明、延伸光束和灯具性能使装置具有高效率 和低于19的UGR值。它也是营造洗墙效果与背景融为一体理想的选择。

Provides medium brightness and clear form. Polarized light, extended beams, and fixture performance give the unit high energy efficiency and low UGR level below 19. It is also ideal for combining the effect of wall washing with background.




## R26-C0115-320A




|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| LED:             | 12W/ 960LM                |
| CCT:             | 3000K/4000K/tunable white |
| CRI:             | >90                       |
| Beam:            | Polarized 20°             |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

## R26-C0115-640A




|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| LED:             | 24W/ 1900LM               |
| CCT:             | 3000K/4000K/tunable white |
| CRI:             | >90                       |
| Beam:            | Polarized 20°             |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

## R26-C0115-960A



|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| Power:           | 36W/ 2800LM               |
| CCT:             | 3000K/4000K/tunable white |
| CRI:             | >90                       |
| Beam:            | Polarized 20°             |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

## R26-C0115-1280A



|                  |                           |
|------------------|---------------------------|
| Color:           | white/black/brown         |
| Power:           | 48W/ 3800LM               |
| CCT:             | 3000K/4000K/tunable white |
| CRI:             | >90                       |
| Beam:            | Polarized 20°             |
| Voltage:         | DC24V                     |
| Dimming options: | TRIAC/0-10V/DALI/TUYA     |

## 04 射灯/泛光灯

Spot light/Directed diffusion light

射灯用密集的光锥来强调物体或建筑元素。亮度对比吸引眼球，将被照亮的物体带入视觉前景。泛光灯发出柔和的光，在照明区域和投射的阴影之间产生对比度的衔接。非常适合阅读情况，因为它不产生眩光。

Use dense cones of light to emphasize objects or architectural elements. Brightness contrast attracts the eye, bringing illuminated objects into focus into the foreground. Directed diffusion light emits soft light, generates low contrasts between the illuminated areas and the shadows cast. Ideal for reading situations or when light output is visible, because it works without glare.

### R26-C0119-100A



**Color:** white/black/brown  
**LED:** 10W/ 810LM  
**CCT:** 3000K/4000K/tunable white  
**CRI:** >90  
**Beam:** 15°/24°/36°  
**Voltage:** DC24V  
**Dimming options:** TRIAC/0-10V/DALI/TUYA

### R26-C0119-100B




**Color:** white/black/brown  
**LED:** 10W/ 780LM  
**CCT:** 3000K/4000K/tunable white  
**CRI:** >90  
**Beam:** 110°  
**Voltage:** DC24V  
**Dimming options:** TRIAC/0-10V/DALI/TUYA

### R26-C0125-200A



**Color:** white/black/brown  
**LED:** 10W/ 750LM  
**CCT:** 3000K/4000K/tunable white  
**CRI:** >90  
**Beam:** 110°  
**Voltage:** DC24V  
**Dimming options:** TRIAC/0-10V/DALI/TUYA

### R26-C0125-300A

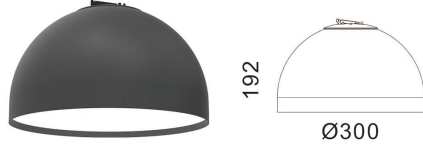

**Color:** white/black/brown  
**LED:** 20W/ 1530LM  
**CCT:** 3000K/4000K/tunable white  
**CRI:** >90  
**Beam:** 110°  
**Voltage:** DC24V  
**Dimming options:** TRIAC/0-10V/DALI/TUYA

## 半球泛光灯 05

Semisphere

发出柔和的光，在照明区域和投射的阴影之间产生低对比度的衔接。灯罩部分有助于引导光线通过导光光学，同时提供稳定和集中的照明。

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.




## 06 泛光球

Sphere

在各个方向 (360°) 均匀分布光线。光线覆盖在整个空间与物体表面以一个舒适角度，营造出一种非常平静、舒适的氛围。


distributes light equally in all directions (360°). It attracts a relaxed gaze towards the point of light, and creates a calm, very comfortable atmosphere. The light sphere bathes all surfaces of the space, Producing a peaceful, richer and extremely homogeneous ambience.

### R26-C0126-200A




Color: white/black/brown  
LED: 8W/ 580LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 360°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA

### R26-C0126-300A



Color: white/black/brown  
LED: 16W/ 1160LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 360°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA



Color: white/black/brown  
LED: 16W/ 1130LM  
CCT: 3000K/4000K/tunable white  
CRI: >90  
Beam: 110°  
Voltage: DC24V  
Dimming options: TRIAC/0-10V/DALI/TUYA



## 圆锥吊灯 07

Cone light

发出柔和的光，在照明区域和投射的阴影之间产生低对比度的衔接。灯罩部分有助于引导光线通过导光光学，同时提供稳定和集中的照明。

emits a soft light that generates low contrasts between the illuminated areas and the shadows cast. The opaque part of the shade helps to direct the light through the diffuser, providing illumination that is both peaceful and concentrated at the same time.



R26-配件(可选)

R26- Accessories (Optional)

► R26-导电针织带

R26 - Conductive Textile Belt



黑色Black

棕色Brown


蓝色Blue (定制Customized)

绿色Green (定制Customized)



10米/20米/30M可选

10m/20m/30m Optional

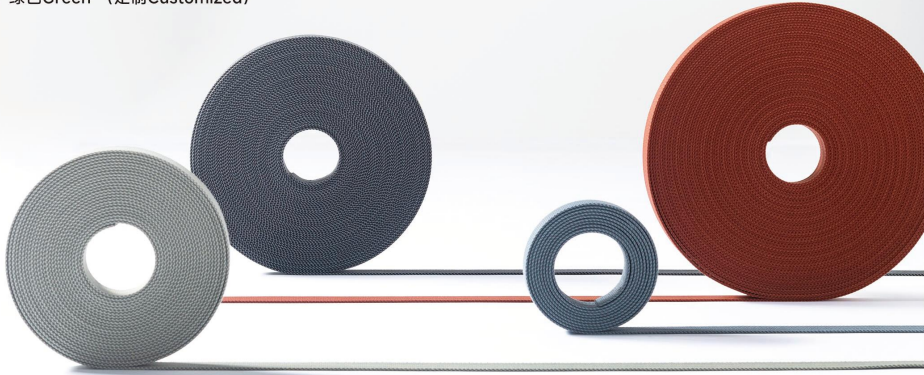

► R26-吊杆 1200mm


R26-Hanging Rod 1200mm



► 接电配件 Terminal Accessories


R26-圆形电源盒

R26-Round Power Box



R26-长条电源盒

R26-Linear Power Box




R26-明装接电盒

R26-Surface Terminal Box



R26-暗装接电盒

R26-Recessed Terminal Box



► 固定配件 Fixed Accessories

R26-拉带固定头

R26-Belt Fixed Base



R26-定位架

R26-Locating Rack



► 其他配件 Other Accessories

R26-吊绳堵头

R26-Suspended End Cap



R26-吊线扣

R26-Suspended Buckle



R26-接电盒

R26-Electric Connector

