




j(mpo)e



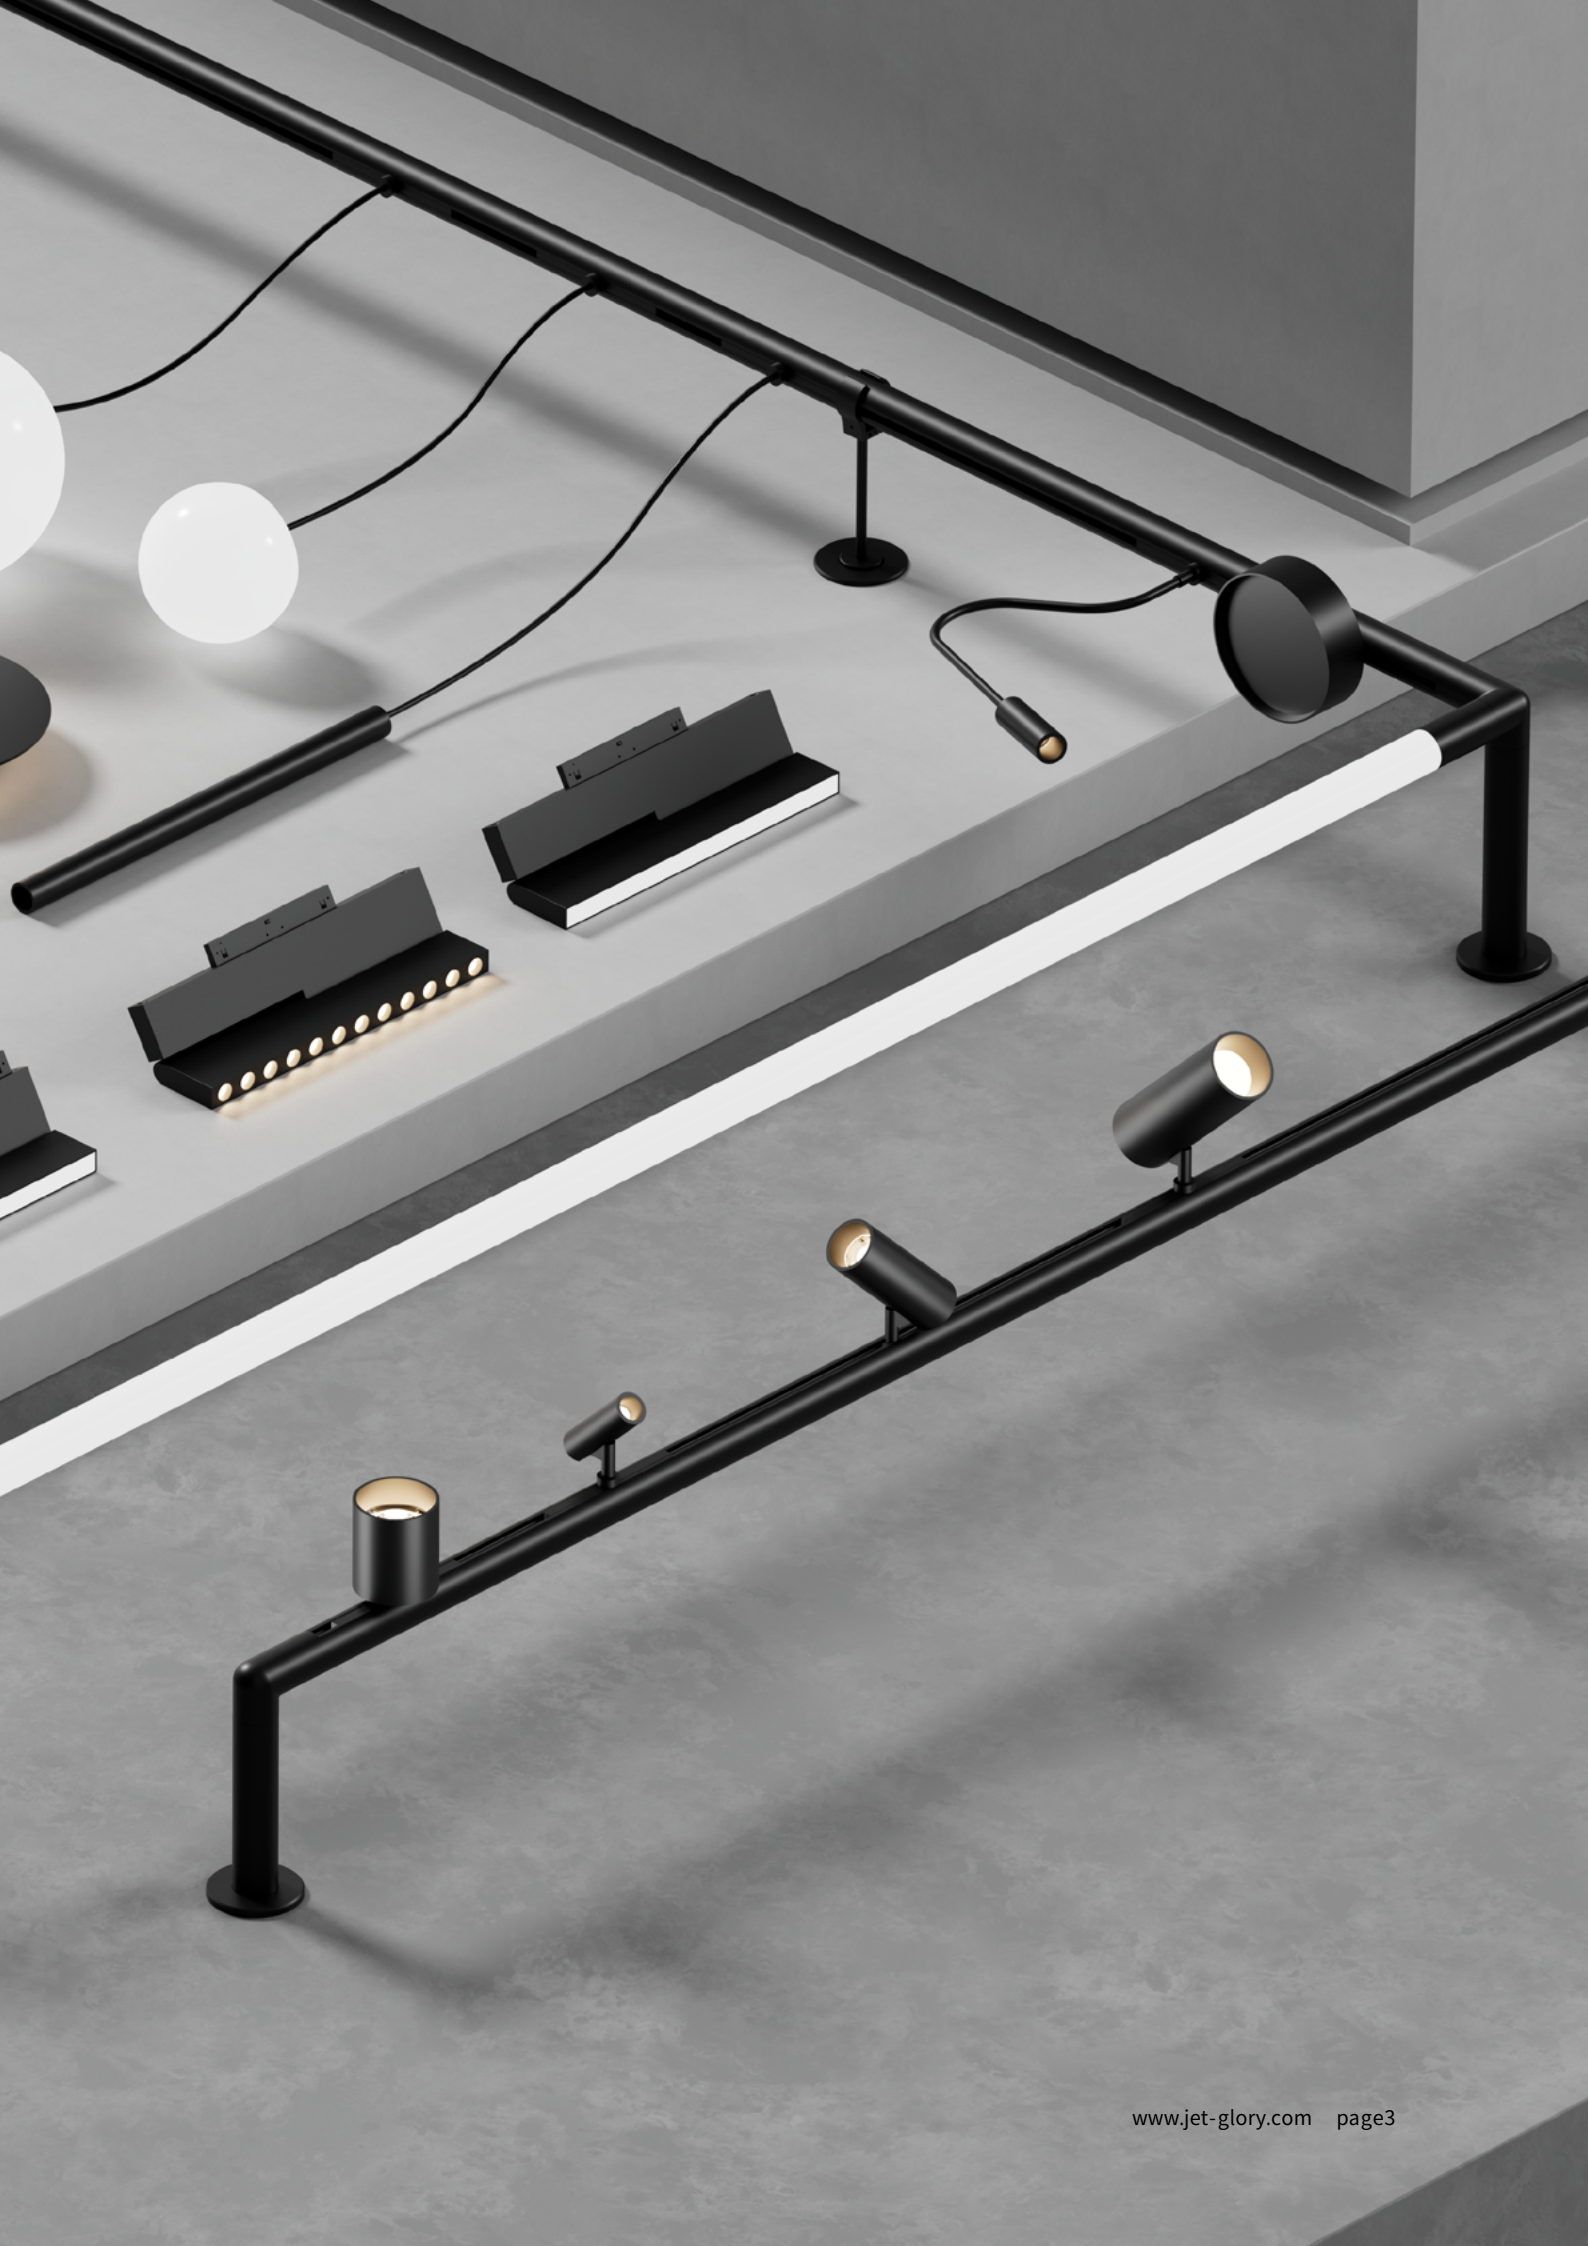

TB-24V 灯具及轨道

TB-24V Luminaires & track

TB 系统只需一套系统即可满足各种照明需求它可以与 TB-DFS、TB-GLR 和 TB-PC 等线性灯具组合使用，营造出独特的照明效果，为了获得最佳的办公室照明效果，TB-track 可与 Nano (5 毫米) 系统灯具插件组合使用从而为照明设计带来更大的灵活性

TB system fulfils a wide range of lighting requirements with just one system.It can be combine with TB-DFS,TB-GLR and TB-PC these linear luminaires achive for a special effect. For optimum office lighting,TB-track can be combine with Nano (5mm) system luminaires inserts for even more flexibility in lighting design.



RT26

Material - Extruded aluminum profile
Surface treatment - Available in white, black
Powder coating of other colors, can be customized upon request.
Size - Diameter 26.6*Length 1000/1500/2000 Other sizes can be customized upon request.



RT26-O-1M/1.5M/2M

Material - Extruded aluminum profile with built-in pure copper wire guide
Surface treatment - Available in white, black
Powder coating of other colors, customizable upon request.
Size - Diameter 26.6*Length 1020/1500/2000 Other sizes can be customized upon request.




RT26-18T/36T/54T

Material - aluminium extruded
Finished - with selection of white, black
& other colors powder coating finishes on requested.
Wattage - 18/24W
Beam Angle - 36 °
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6



RT26-370/700F/1000F

Material - aluminium extruded
Finished - with selection of white, black
& other colors powder coating finishes on requested.
Wattage - 18/24W
Beam Angle - 120 °
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6




RT26-TUBE370/700/1000

Material - aluminium extruded
Finished - with selection of white, black
& other colors powder coating finishes on requested.
Wattage - 18/24W
Beam Angle - 360 °
CCT- 3000K 4000K 5000K
Size - L374*D26.6/L700*D26.6/L1020*D26.6



管道通过简单的旋转、插入实现电气和机械连接，这使得复杂照明系统的安装极其简单、快速和直接。

The pipes are connected electrically and mechanically by simply twisting and inserting. This makes the installation of complex lighting systems extremely simple, fast and straightforward.

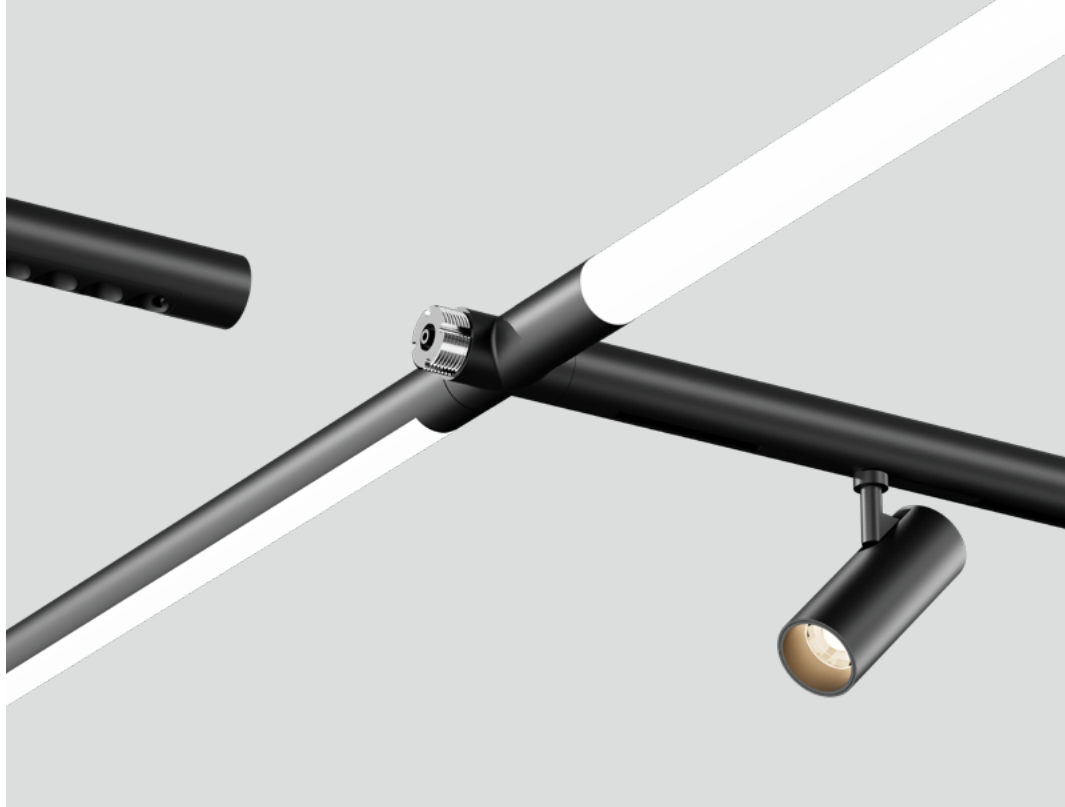

TUBO 系统灯具实现 360° 配光和乳白色灯罩，可实现均匀照明，并略微提升地区亮度。这使得该系统灯具非常适合需要营造舒适环境照明的场所

TUBO system luminaires offer 360° light distribution and opalescent shades for even illumination and slightly brighter areas. This makes them ideal for locations that require comfortable ambient lighting

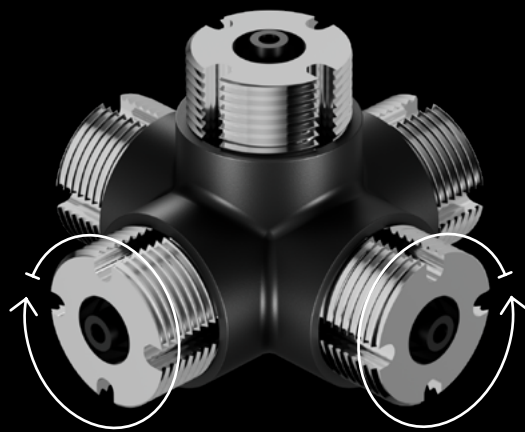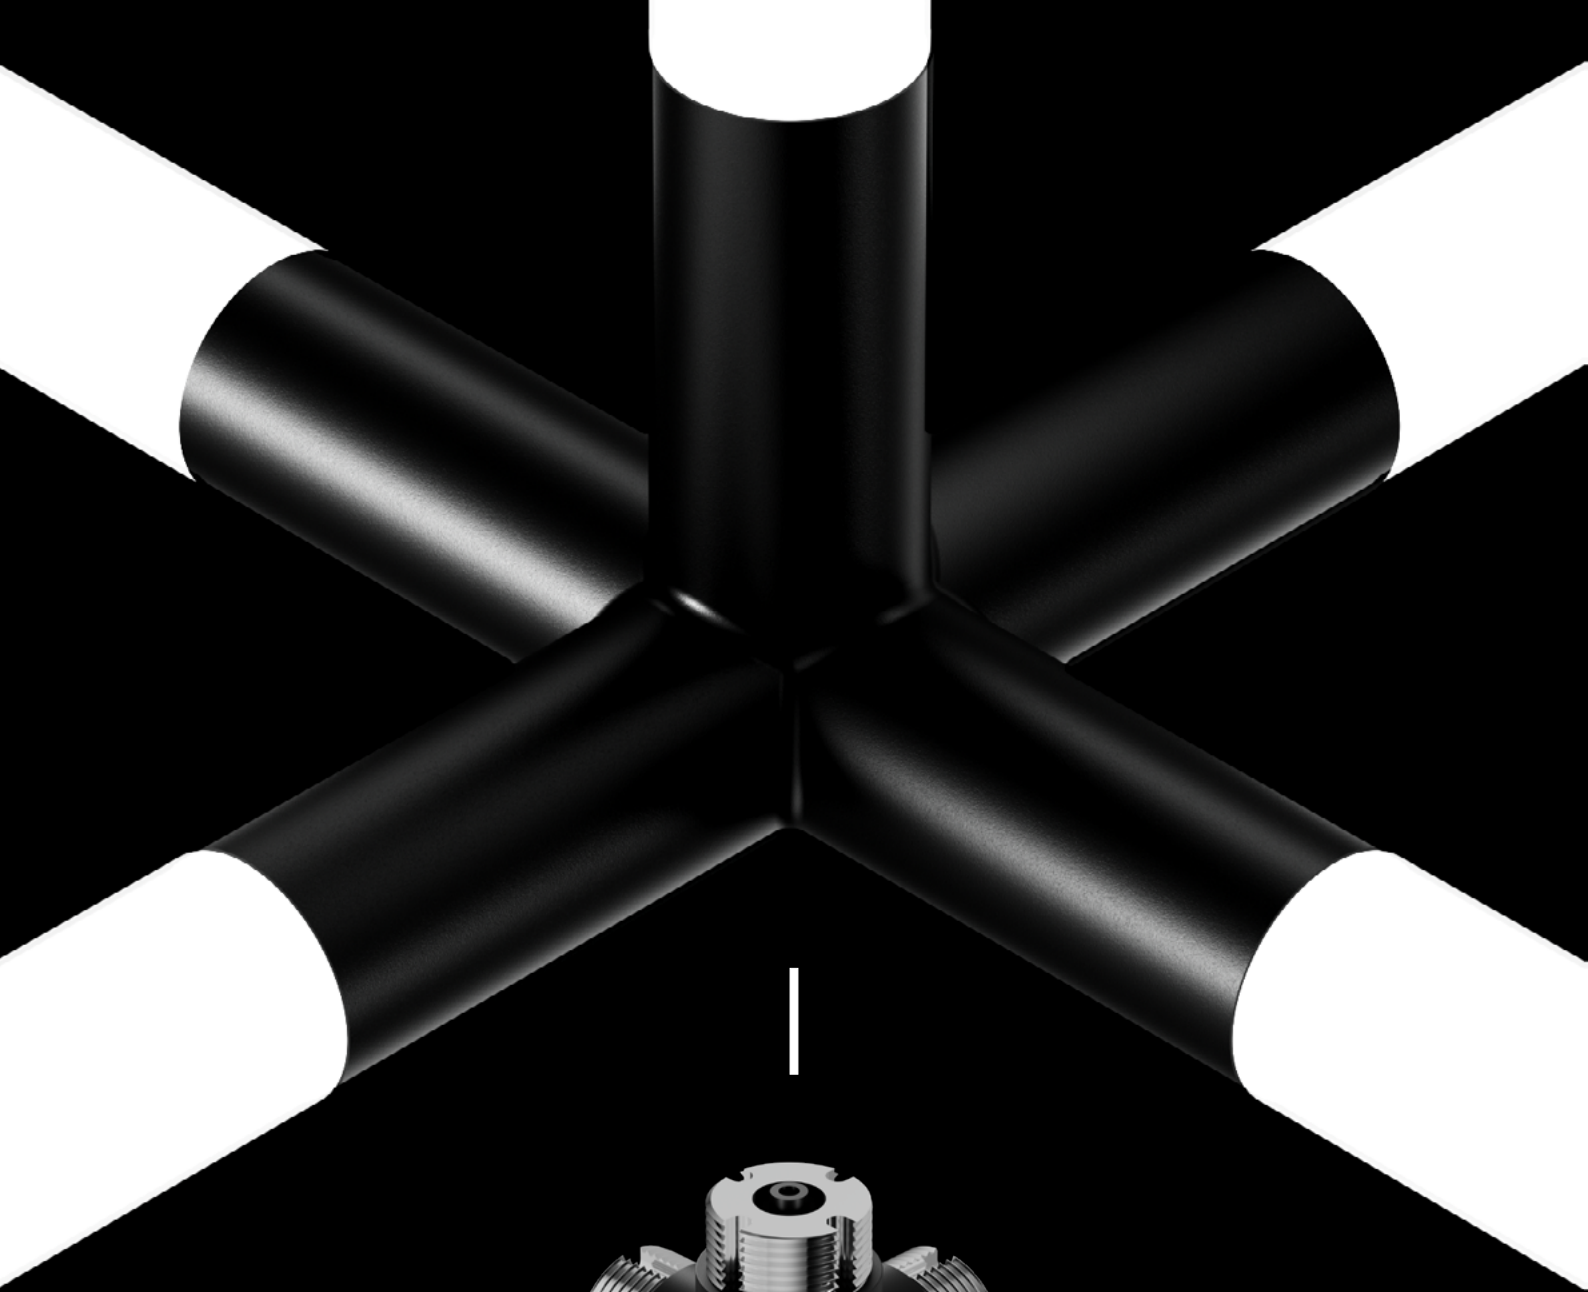

由于 L 形、T 形和 X 形的机械和电气连接元件种类繁多，因此具有最大的设计自由度。借助 TB 连接系统，可以轻松实现几何形状、迷人的灯光雕塑以及不同空间要求的满足。

Thanks to the wide range of mechanical and electrical connection elements such as I-type, L-type, T-type, X-type and 4D connectors, there is a high degree of design freedom. Geometric shapes, fascinating light sculptures and the need to meet different spatial requirements can be easily realized.




型号 /Moble

RT26-O-I

材料 /Material

铝材 /Aluminum




型号 /Moble

RT26-O-L

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-O-T

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-O-Y

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-O-十

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-O-下

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-O-5way

材料 /Material

铝材 /Aluminum




型号 /Moble

RT26-Base-A

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-Base-B

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-O-AD

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-power supply 150W

材料 /Material

铝材 /Aluminum



型号 /Moble

RT26-Base-C


材料 /Material

铝材 /Aluminum



RT26-O-AD 具有 200 ° 水平旋转和 360 ° 旋转连接器，控制灯光方向，还可以形成无数种形状，让场景设计感更加得丰富自如，

RT26-O-AD has 200 ° horizontal rotation and 360 ° rotating connector to control the direction of the light. It can also form countless shapes, making the scene design more rich and free.

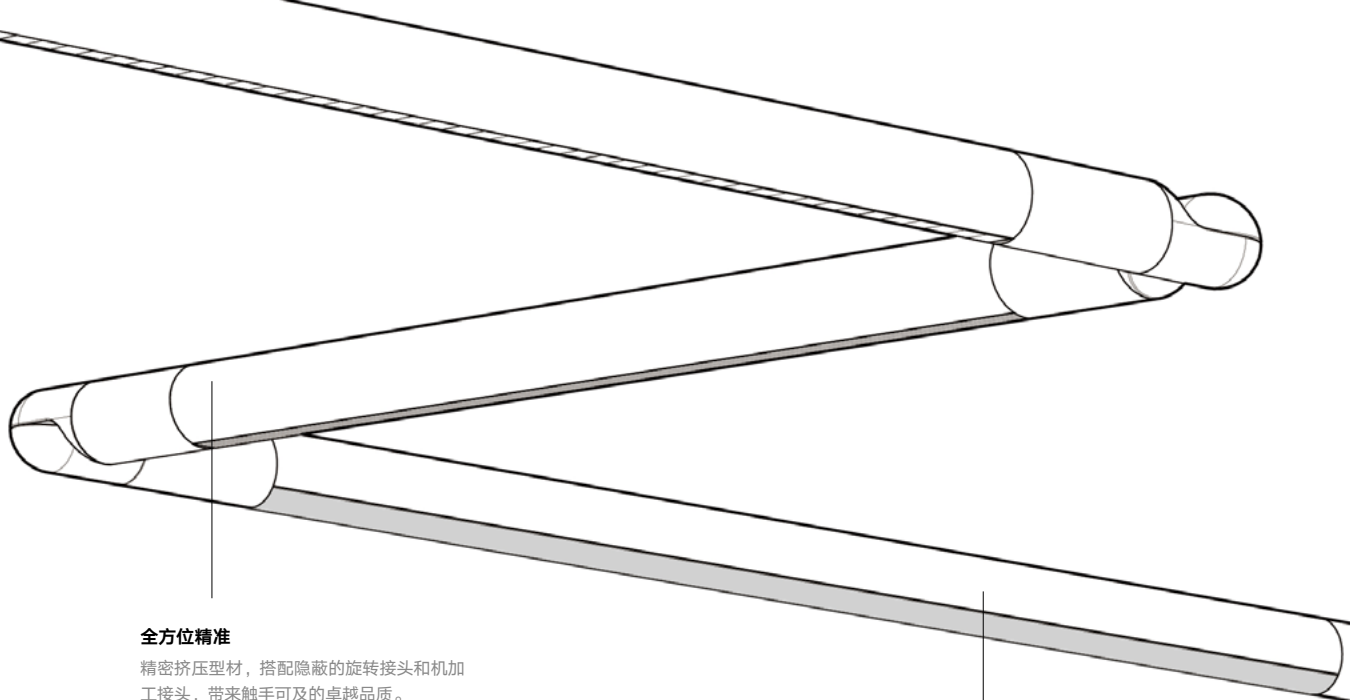

全方位精准

精密挤压型材，搭配隐蔽的旋转接头和机加工接头，带来触手可及的卓越品质。

ALL AROUND PRECISION


Precision extruded profile with discreet swivels and machined joiners for premium quality you can touch and see.

适应任何空间

易于重新配置的端盖和连接系统可以成为任何空间的理想选择，从极简主义的建筑走廊到新一代的蛇形楼梯。

ALL AROUND PRECISION

The easily reconfigurable end cap and connection system can be ideal for any space, from a minimalist architectural corridor to a new generation of serpentine staircases.

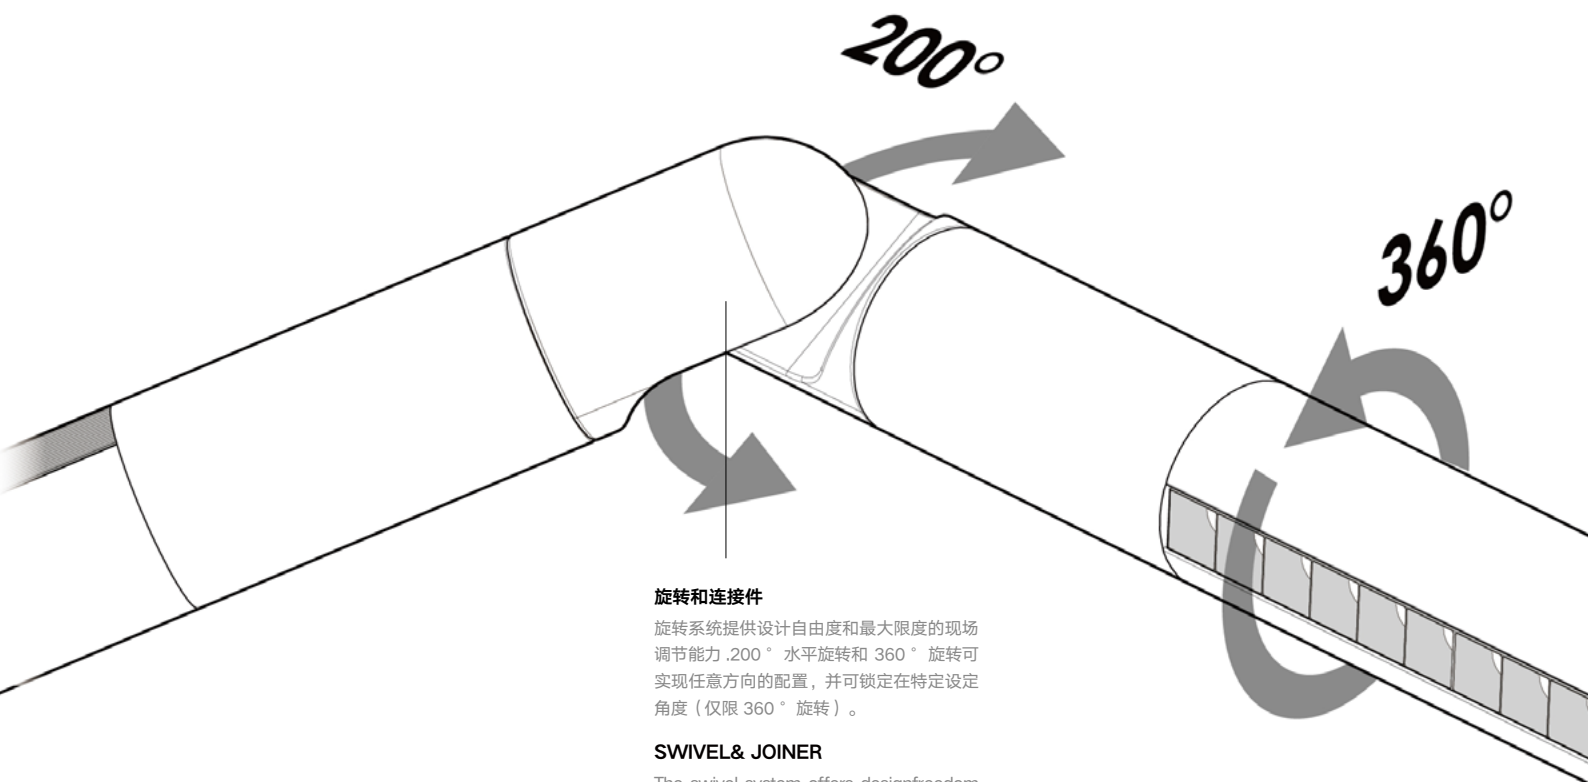

旋转和连接件

旋转系统提供设计自由度和最大限度的现场调节能力。200° 水平旋转和 360° 旋转可实现任意方向的配置，并可锁定在特定设定角度（仅限 360° 旋转）。

SWIVEL & JOINER

The swivel system offers design freedom and maximum on-site adjust-ability. The horizontal rotation of 200° and a full 360° rotation swivel enables configuration in any desired direction and can be locked in a specific set angle (360° rotation only).




无限变换，以下是我们探索出的形状和图案，
还有更多丰富的形状等着你去创造。

Infinite transformations, the following are the
shapes and patterns we explored, and more
rich shapes are waiting for you to create.






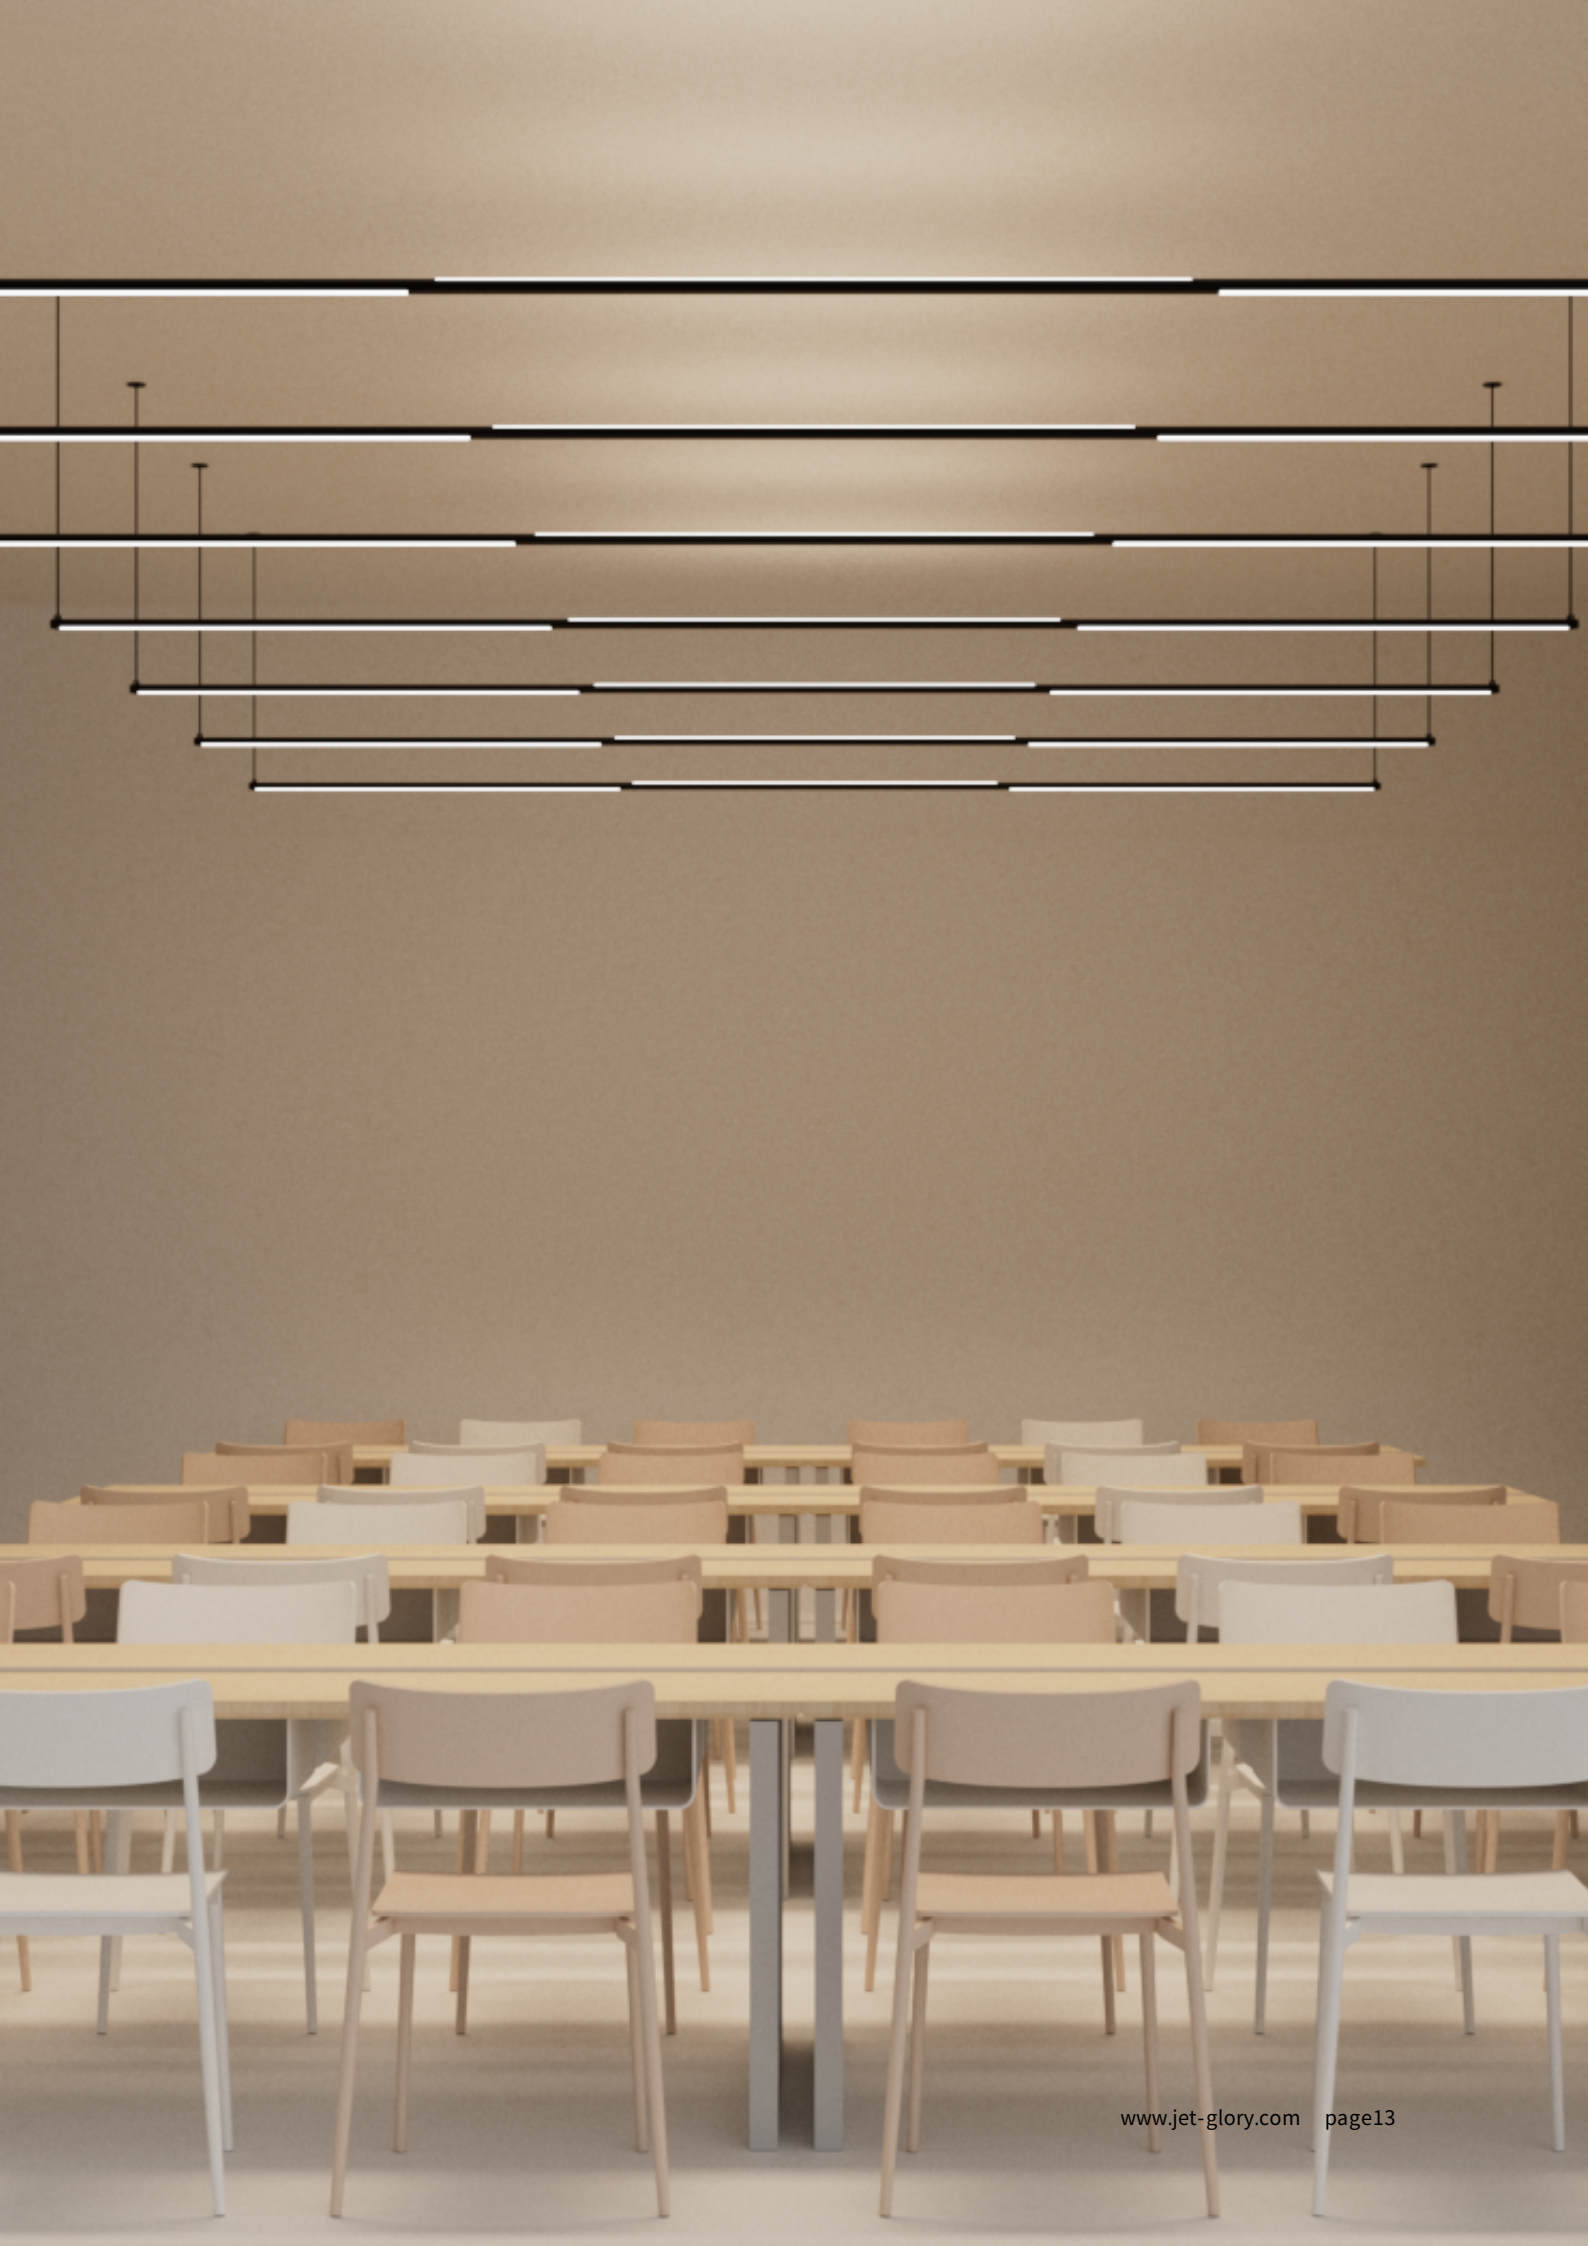




线性格栅灯
LINEAR GRILLE LIGHTS




线性泛光灯
LINEAR FLOODLIGHT

UN5-12T
尺寸 /SIZE(MM)




功率 /Power
6W
光束角 /Beam angle
60 °
色温 /CCT
3000K/4000K/6000K

UN5-300F
尺寸 /SIZE(MM)



功率 /Power
9W
光束角 /Beam angle
120 °
色温 /CCT
3000K/4000K/6000K

UN5-600F
尺寸 /SIZE(MM)



功率 /Power
18W
光束角 /Beam angle
120 °
色温 /CCT
3000K/4000K/6000K

灯体颜色 /Light Color

黑色 /Black

通用规格 /General specifications


灯体材料 /Material	铝材 /Aluminum
扩散罩材料 /Diffuser	Lens
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V





折叠格栅灯
FOLDING GRILLE LIGHTS




折叠泛光灯
FOLDING FLOODLIGHT

UN5-ZD-6T
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K

UN5-ZD-12T
尺寸 /SIZE(MM)

功率 /Power
12W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K

UN5-ZD-6F
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
120 °
色温 /CCT
3000K/4000K/6000K

UN5-ZD-12F
尺寸 /SIZE(MM)

功率 /Power
12W
光束角 /Beam angle
120 °
色温 /CCT
3000K/4000K/6000K

灯体颜色 /Light Color

黑色 /Black



通用规格 /General specifications


灯体材料 /Material	铝材 /Aluminum
扩散罩材料 /Diffuser	Lens
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V



轨道射灯
TRACK LIGHTS



圆球灯
TRACK BALL LAMP


UN5-L20
尺寸 /SIZE(MM)

功率 /Power
3W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Lens

UN5-L33
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Lens

UN5-L43
尺寸 /SIZE(MM)

功率 /Power
12W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Lens

UN5-P95
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
180 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Glass

灯体颜色 /Light Color

黑色 /Black

通用规格 /General specifications

灯体材料 /Material	铝材 /Aluminum
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V




双层玻璃球
DOUBLE LAYERED GLASS BALL




轨道式 - 月球
TRACK TYPE -MOON
UN5-GDD150



轨道式 - 地球
TRACK TYPE -EARTH
UN5-GDY150

UN5-B80
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
150 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Glass

UN5-GDD150/UN5-GDY150
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
350 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Plastic

灯体颜色 /Light Color

黑色 /Black



通用规格 /General specifications

灯体材料 /Material	铝材 /Aluminum
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V




明装圆形射灯


SURFACE MOUNTED SPOTLIGHTS



日蚀壁灯

SOLAR ECLIPSE WALL LAMP

UN5-TD50
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Lens

UN5-YSBD
尺寸 /SIZE(MM)

功率 /Power
9W
光束角 /Beam angle
150 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
PC


灯体颜色 /Light Color

黑色 /Black



通用规格 /General specifications

灯体材料 /Material	铝材 /Aluminum
扩散罩材料 /Diffuser	Lens
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V

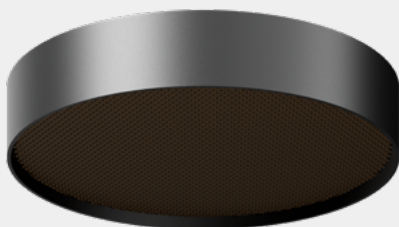


明装泛光灯
SURFACE MOUNTED FLOODLIGHT




明装圆形射灯
SURFACE MOUNTED SPOTLIGHTS 9 IN 1

UN5-WB90
尺寸 /SIZE(MM)




功率 /Power
9W
光束角 /Beam angle
120 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Lens

UN5-WB168
尺寸 /SIZE(MM)



功率 /Power
18W
光束角 /Beam angle
120 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Lens

UN5-G90
尺寸 /SIZE(MM)



功率 /Power
9W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Lens

灯体颜色 /Light Color

黑色 /Black



通用规格 /General specifications

灯体材料 /Material	铝材 /Aluminum
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V




直式悬吊灯


HOISTING-STRAIGHT CYLINDER



直式悬圆球灯

SUSPENDED SPHERICAL LAMP

UN5-30D300
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
Lens

UN5-DP95
尺寸 /SIZE(MM)

功率 /Power
6W
光束角 /Beam angle
180 °
色温 /CCT
3000K/4000K/6000K
扩散罩材料 /Diffuser
PC

灯体颜色 /Light Color

黑色 /Black



通用规格 /General specifications

灯体材料 /Material	铝材 /Aluminum
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V



地球

SURFACE MOUNTED SPOTLIGHTS
UN5-D150



月球

SURFACE MOUNTED SPOTLIGHTS
UN5-Y150




轨道式阅读灯

TRACK TYPE READING LIGHT

UN5-D150/Y150

尺寸 /SIZE(MM)



功率 /Power

6W

光束角 /Beam angle

350 °

色温 /CCT

3000K/4000K/6000K

扩散罩材料 /Diffuser

Plastic

UN5-YDL20

尺寸 /SIZE(MM)



功率 /Power

3W

光束角 /Beam angle

24 °

色温 /CCT

3000K/4000K/6000K

扩散罩材料 /Diffuser

Lens

灯体颜色 /Light Color

黑色 /Black

通用规格 /General specifications


灯体材料 /Material	铝材 /Aluminum
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V

软性线条灯
SOFT LINEAR LAMP



UN5-GJXT1000

尺寸 / SIZE(MM)



功率 / Power

10W

光束角 / Beam angle


180 °

色温 / CCT

3000K/4000K/6000K

UN5-GJXT2000

尺寸 / SIZE(MM)



功率 / Power

20W

光束角 / Beam angle


180 °

色温 / CCT

3000K/4000K/6000K

UN5-GJXT3000

尺寸 / SIZE(MM)



功率 / Power

30W

光束角 / Beam angle


180 °

色温 / CCT

3000K/4000K/6000K

灯体颜色 / Light Color

黑色 / Black




通用规格 / General specifications

灯体材料 / Material	硅胶 / Silica gel
扩散罩材料 / Diffuser	硅胶 / Silica gel
防护等级 / IP	IP20
工作温度 / Warranty	-25 ° C~50 ° C
质保 / Warranty	5 YEARS
电压 / Voltage	24V




金刚棒 - 泛光灯
STICK - FLOODLIGHT

UN5-SS300F
尺寸 / SIZE(MM)




功率 /Power
9W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K

UN5-SS600F
尺寸 / SIZE(MM)



功率 /Power
18W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K

UN5-SS900F
尺寸 / SIZE(MM)



功率 /Power
27W
光束角 /Beam angle
24 °
色温 /CCT
3000K/4000K/6000K

灯体颜色 /Light Color

黑色 /Black



通用规格 /General specifications

灯体材料 /Material	铝材 /Aluminum
扩散罩材料 /Diffuser	Lens
防护等级 /IP	IP20
工作温度 /Warranty	-25 ° C~50 ° C
质保 /Warranty	5 YEARS
电压 /Voltage	24V



*Host
Sub Unit*

轨道蓝牙音响有主副机两种模式
可以通过设备后盖拨码来切换主机与副机
1个主机可以带动N...个副机

The Track Bluetooth Speaker has two modes of Host and Sub Unit, which can be switched between the Host and Sub Unit by dip switch on the back cover of the device.

One Host can drive N... Sub Unit



 **Bluetooth® Speaker**

呼吸灯

Breathing light

全频单元的材料和结构能更有效地减少低频失真
即使在音量较高的情况下也是如此

The material and structure of the full frequency unit can reduce
the low frequency distortion more effectively

This is true even at higher volumes



Dial switch Host or Sub Unit



Use it in track



Media Play



Hi-Fi Sound


 **Bluetooth® Speaker**

www.jet-glory.com page27


轨道蓝牙音响

Track Bluetooth speaker



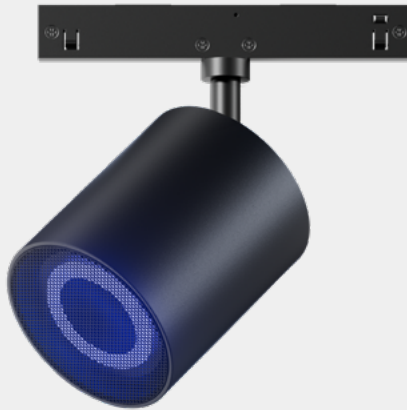

轨道蓝牙音响
TRACK BLUETOOTH SPEAKER

UN5-30D300
尺寸 / SIZE(MM)

功率 /Power
10W
电压 /Voltage
DC24V-48V/AC85V-265V
蓝牙版本 /Bluetooth Version
V5.4
信号频率 /Signal Frequency
12DB
主机机距离 /Distance Between Host & Sub Unit
20 米无障碍 /20 meters barrier-free
材质 /Material
PC
防护等级 /Protection class
IP20
使用环境温度 /Ambient temperature
-20 ° C~40C

RT26 System









Photo	Model	Specifications	Size/mm
	RT26-O-AD	2D-connector V 接头	L68×D26.6
	RT26-O-Sexangle	2D-connector Sexangle 接头	L68×D26.6
	RT26-O-I	2D-connector I 接头	L43×D26.6
	RT26-O-L	2D-connector L 接头	L35×D26.6
	RT26-O-T	2D-connector T 接头	L43×D26×H35
	RT26-O-Y	3D-connector Y 接头	L35×D26
	RT26-O-+	2D-connector + 接头	L43×W43
	RT26-O-K	3D-connector 下 接头	L43×W35
	RT26-O-5way 5通	3D-connector 5通 接头	L43×W42×H35


























Photo	Model	Specifications	Size/mm
	RT26-Base-A	input base A	D56.6×H36
	RT26-Base-B	input base B	D56.6×H26
	RT26-Base-C	Fixed base C	D56.6×H320
	RT26-AL-Base	Fixed base D	D57×L320
	RT26-power supply 100W A	100W POWER SUPPLY	D57×L320
	RT26-power supply 150W	150W POWER SUPPLY	D57×L320
	RT26-power supply 60W	60W POWER SUPPLY	W25×H20×L165
	RT26-power supply 100W B	100W POWER SUPPLY	W25×H20×L200
	RT26-power supply 200W	200W POWER SUPPLY	W25×H20×L245
	RT26-ALfitting-279	铝材 接驳管	L279×D26.6
	RT26-ALfitting-374	铝材 接驳管	L374×D26.6

Photo	Model	Specifications	Size/mm
	RT26-O-1M	Circular lifting track	L1020×D26.6
	RT26-O-1.5M	Circular lifting track	L1500×D26.6
	RT26-O-2M	Circular lifting track	L2000×D26.6
	RT26-18T	18T-格栅灯	L374×D26.6
	RT26-36T	36T-格栅灯	L697×D26.6
	RT26-54T	54T-格栅灯	L1020×D26.6
	RT26-370F	370F 泛光灯	D56.6×H320
	RT26-700F	700F 泛光灯	D57×L320
	RT26-1000F	1000F 泛光灯	D57×L320
	RT26-TUBE370	370F 灯管	L374×D26.6
	RT26-TUBE700	700F 灯管	L697×D26.6
	RT26-TUBE1000	1000F 灯管	L1020×D26.6


RT26 System



RT26-Power

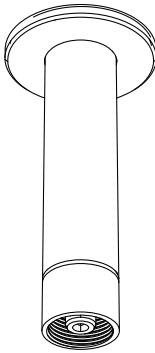


Step1 Step2


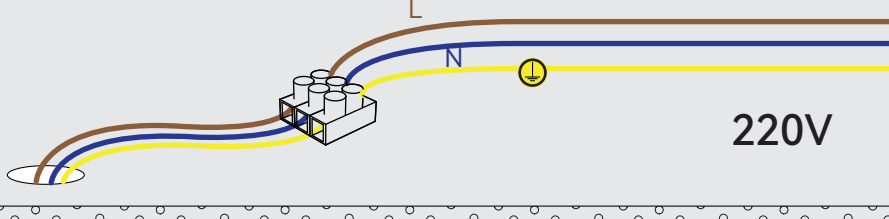


220V


DC 24V Max.150W

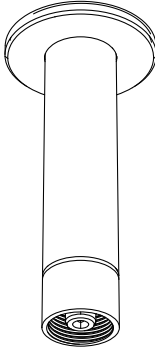

RT26-AL-Base




Step1 Step2

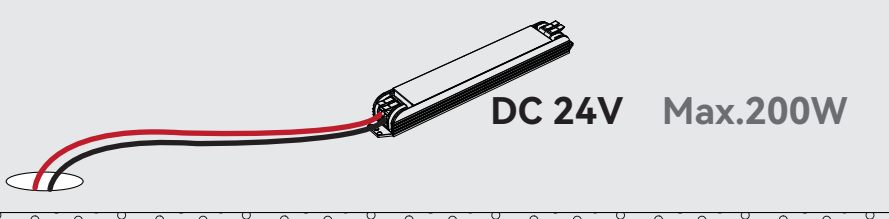

DC 24V Max.200W


ADDITIONAL FUNCTION
The base can be custom-cut to accommodate any power supply dimensions.




RT26-Base-A



Step1 Step2

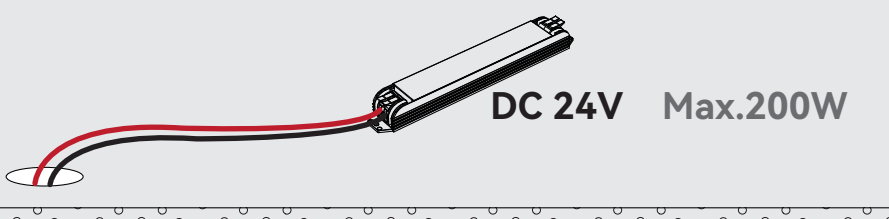


DC 24V Max.200W



RT26-Base-B





Step1 Step2

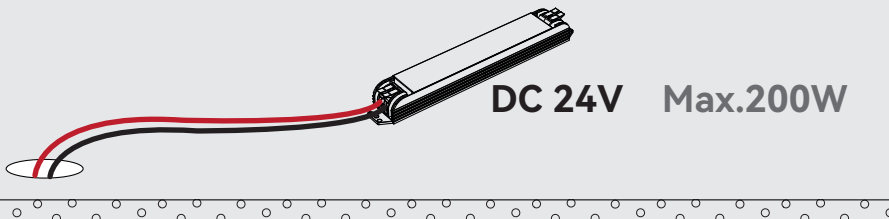


DC 24V Max.200W

Installation sequence




RT26-Power
RT26-AL-Base
RT26-Base-B

+



Any-type connector


+

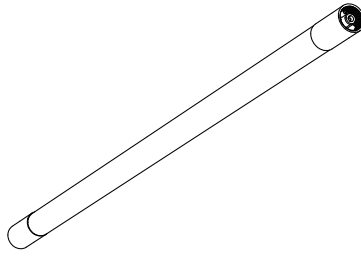





Any tubular luminaire or track

RT26 Installation Instructions


System Assembly

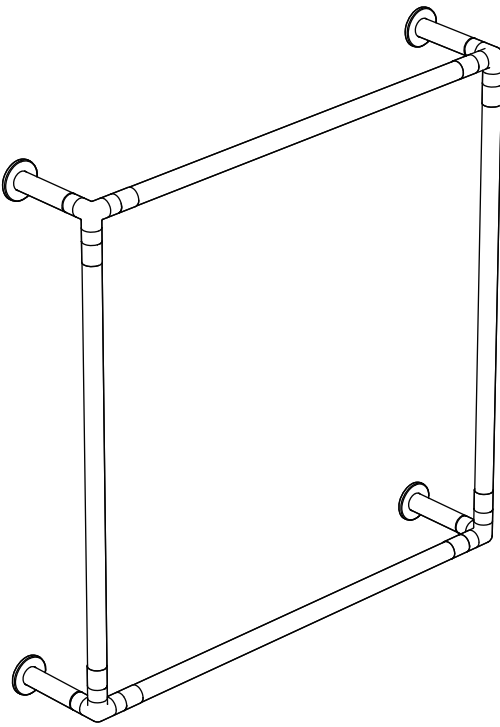

Parts list

	RT26-Power		×1
	RT26-AL-Base		×3
	RT26-O-Y		×4
	Tube-mounted lighting		×4


Assembly method

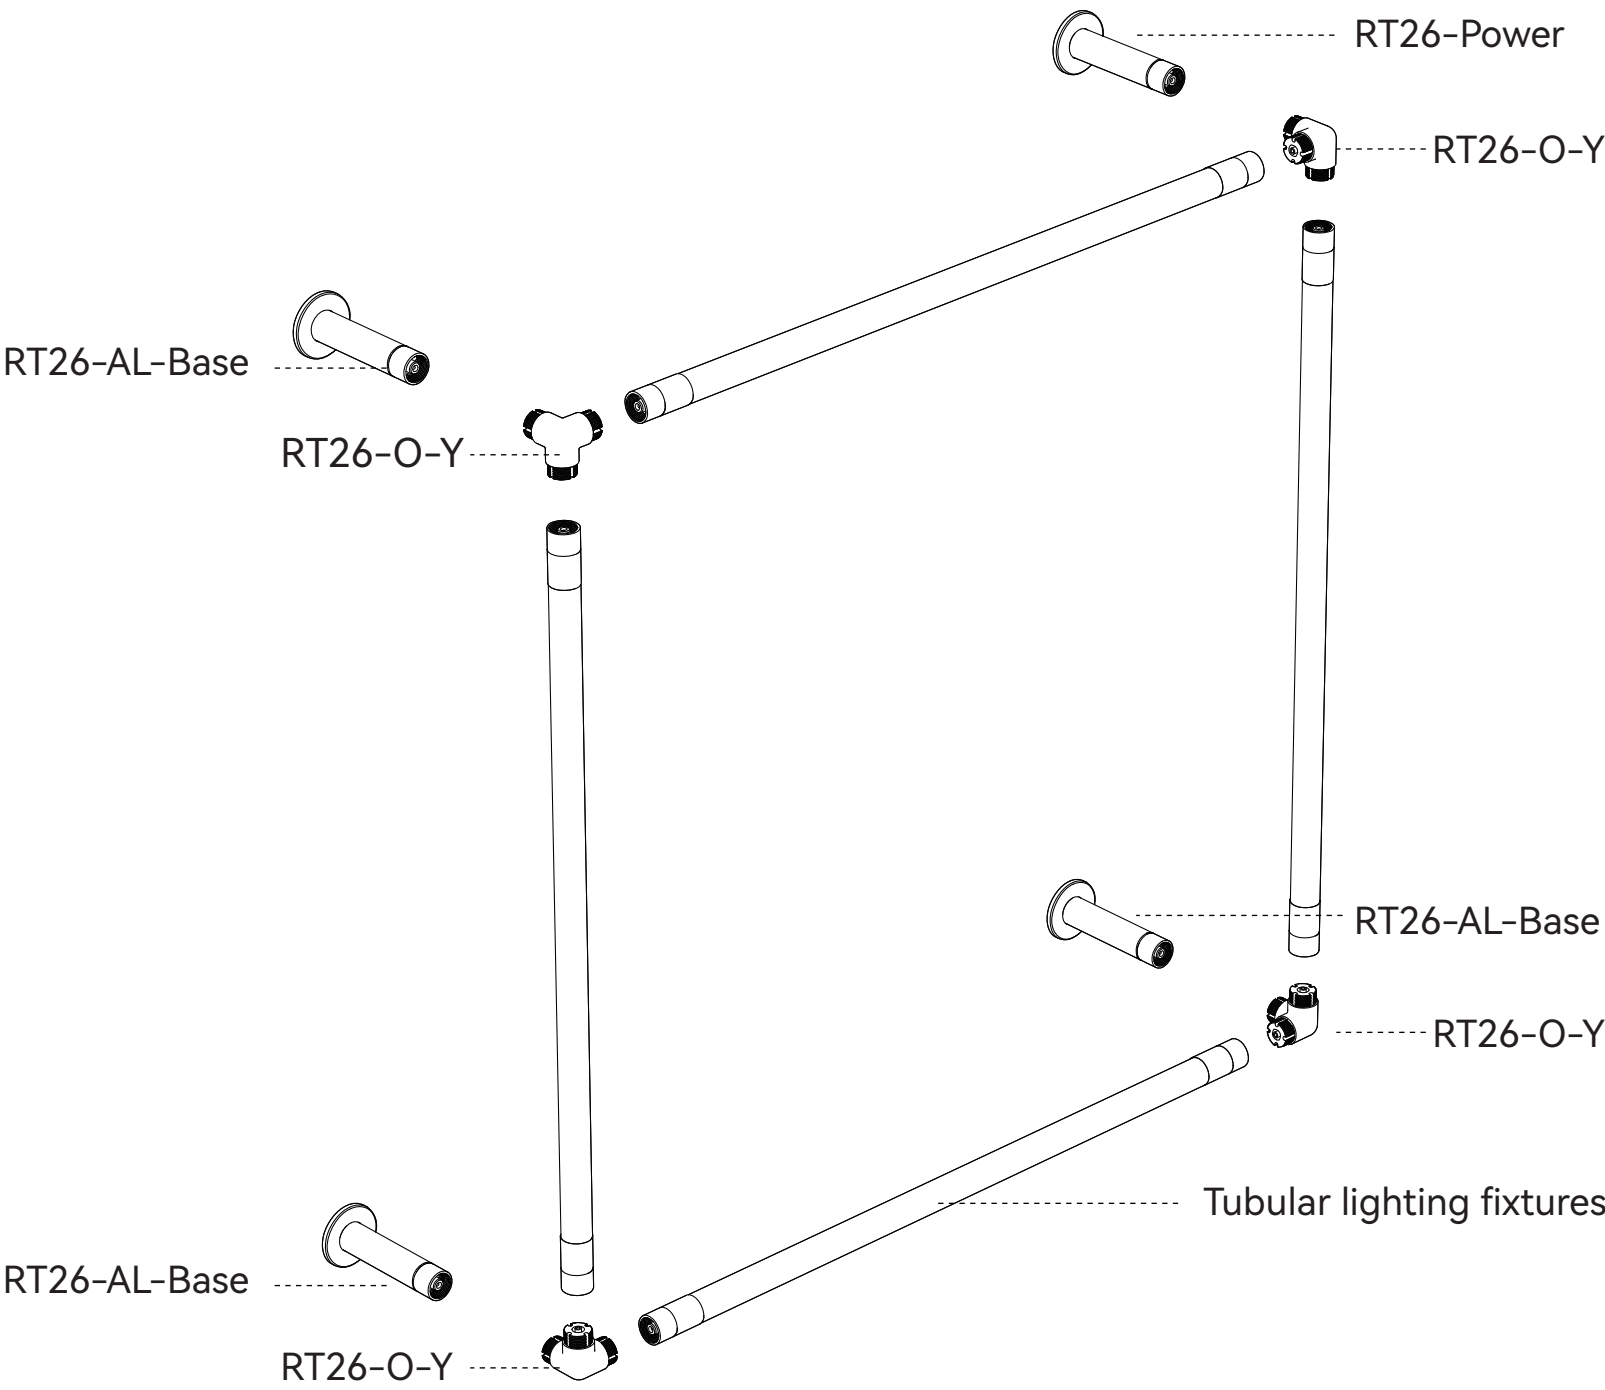








The power supply should be positioned in the middle of the system.

RT26 System


System Assembly

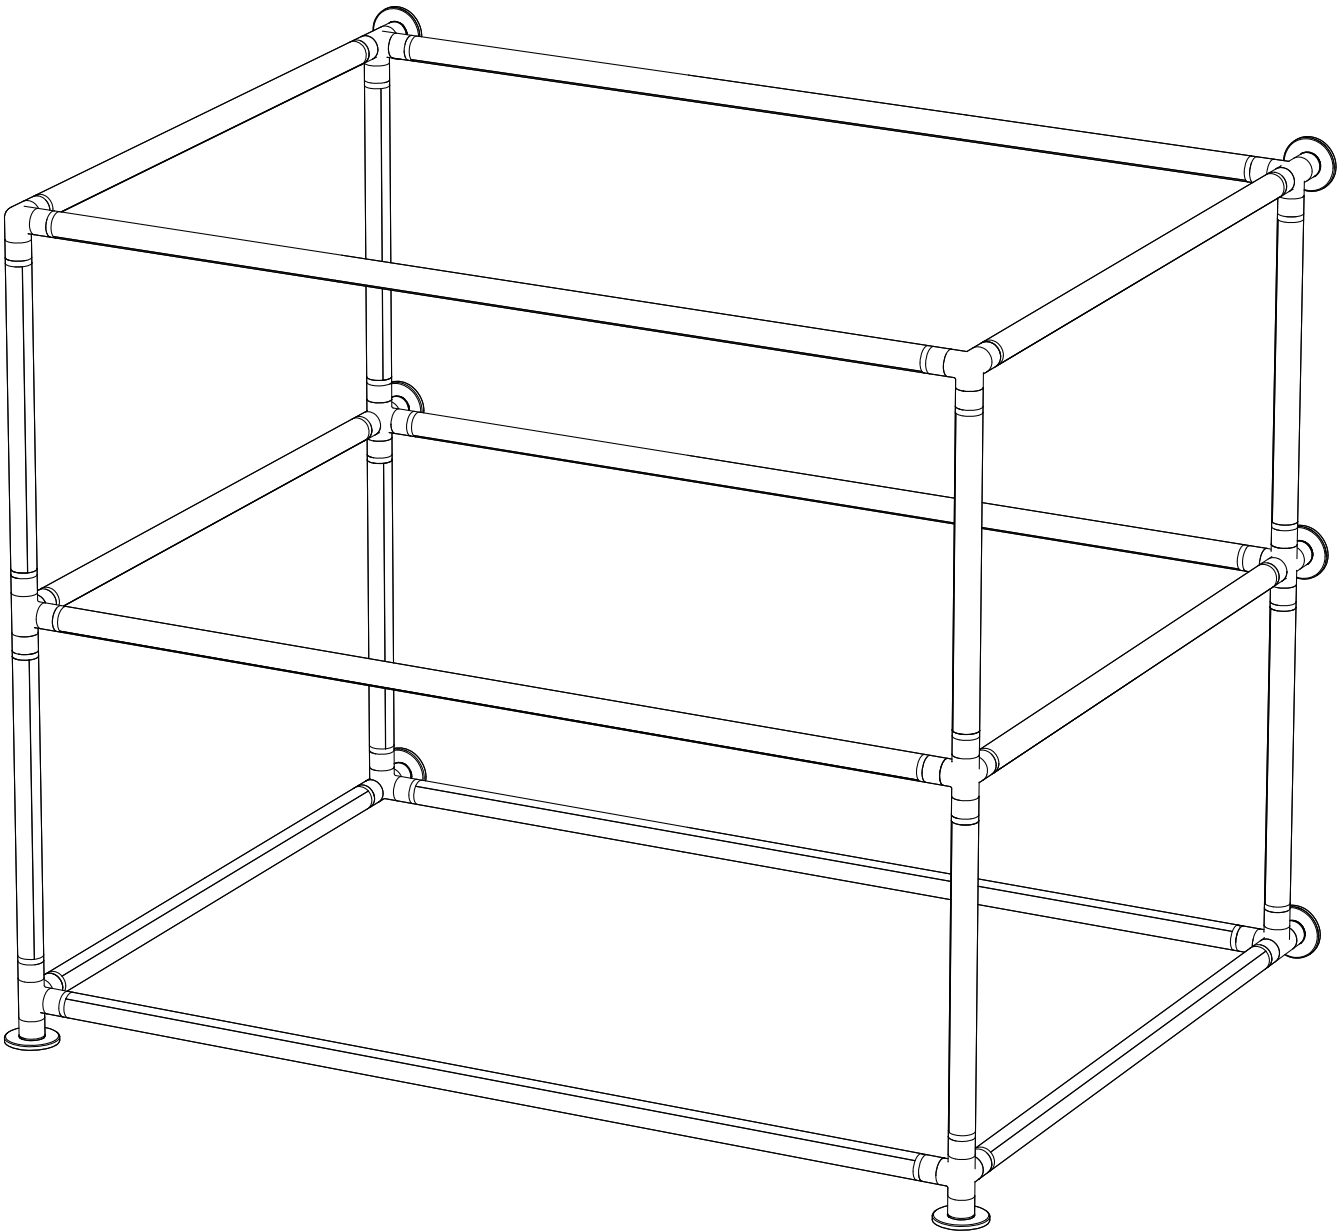


Parts list

	RT26-power supply 100W B	×3		RT26-370F	×14
	RT26-O-Y	×2		RT26-700F	×6
	RT26-O-K	×8			
	RT26-O-5way 5通	×2			
	RT26-Base-B	×8			

Assembly method

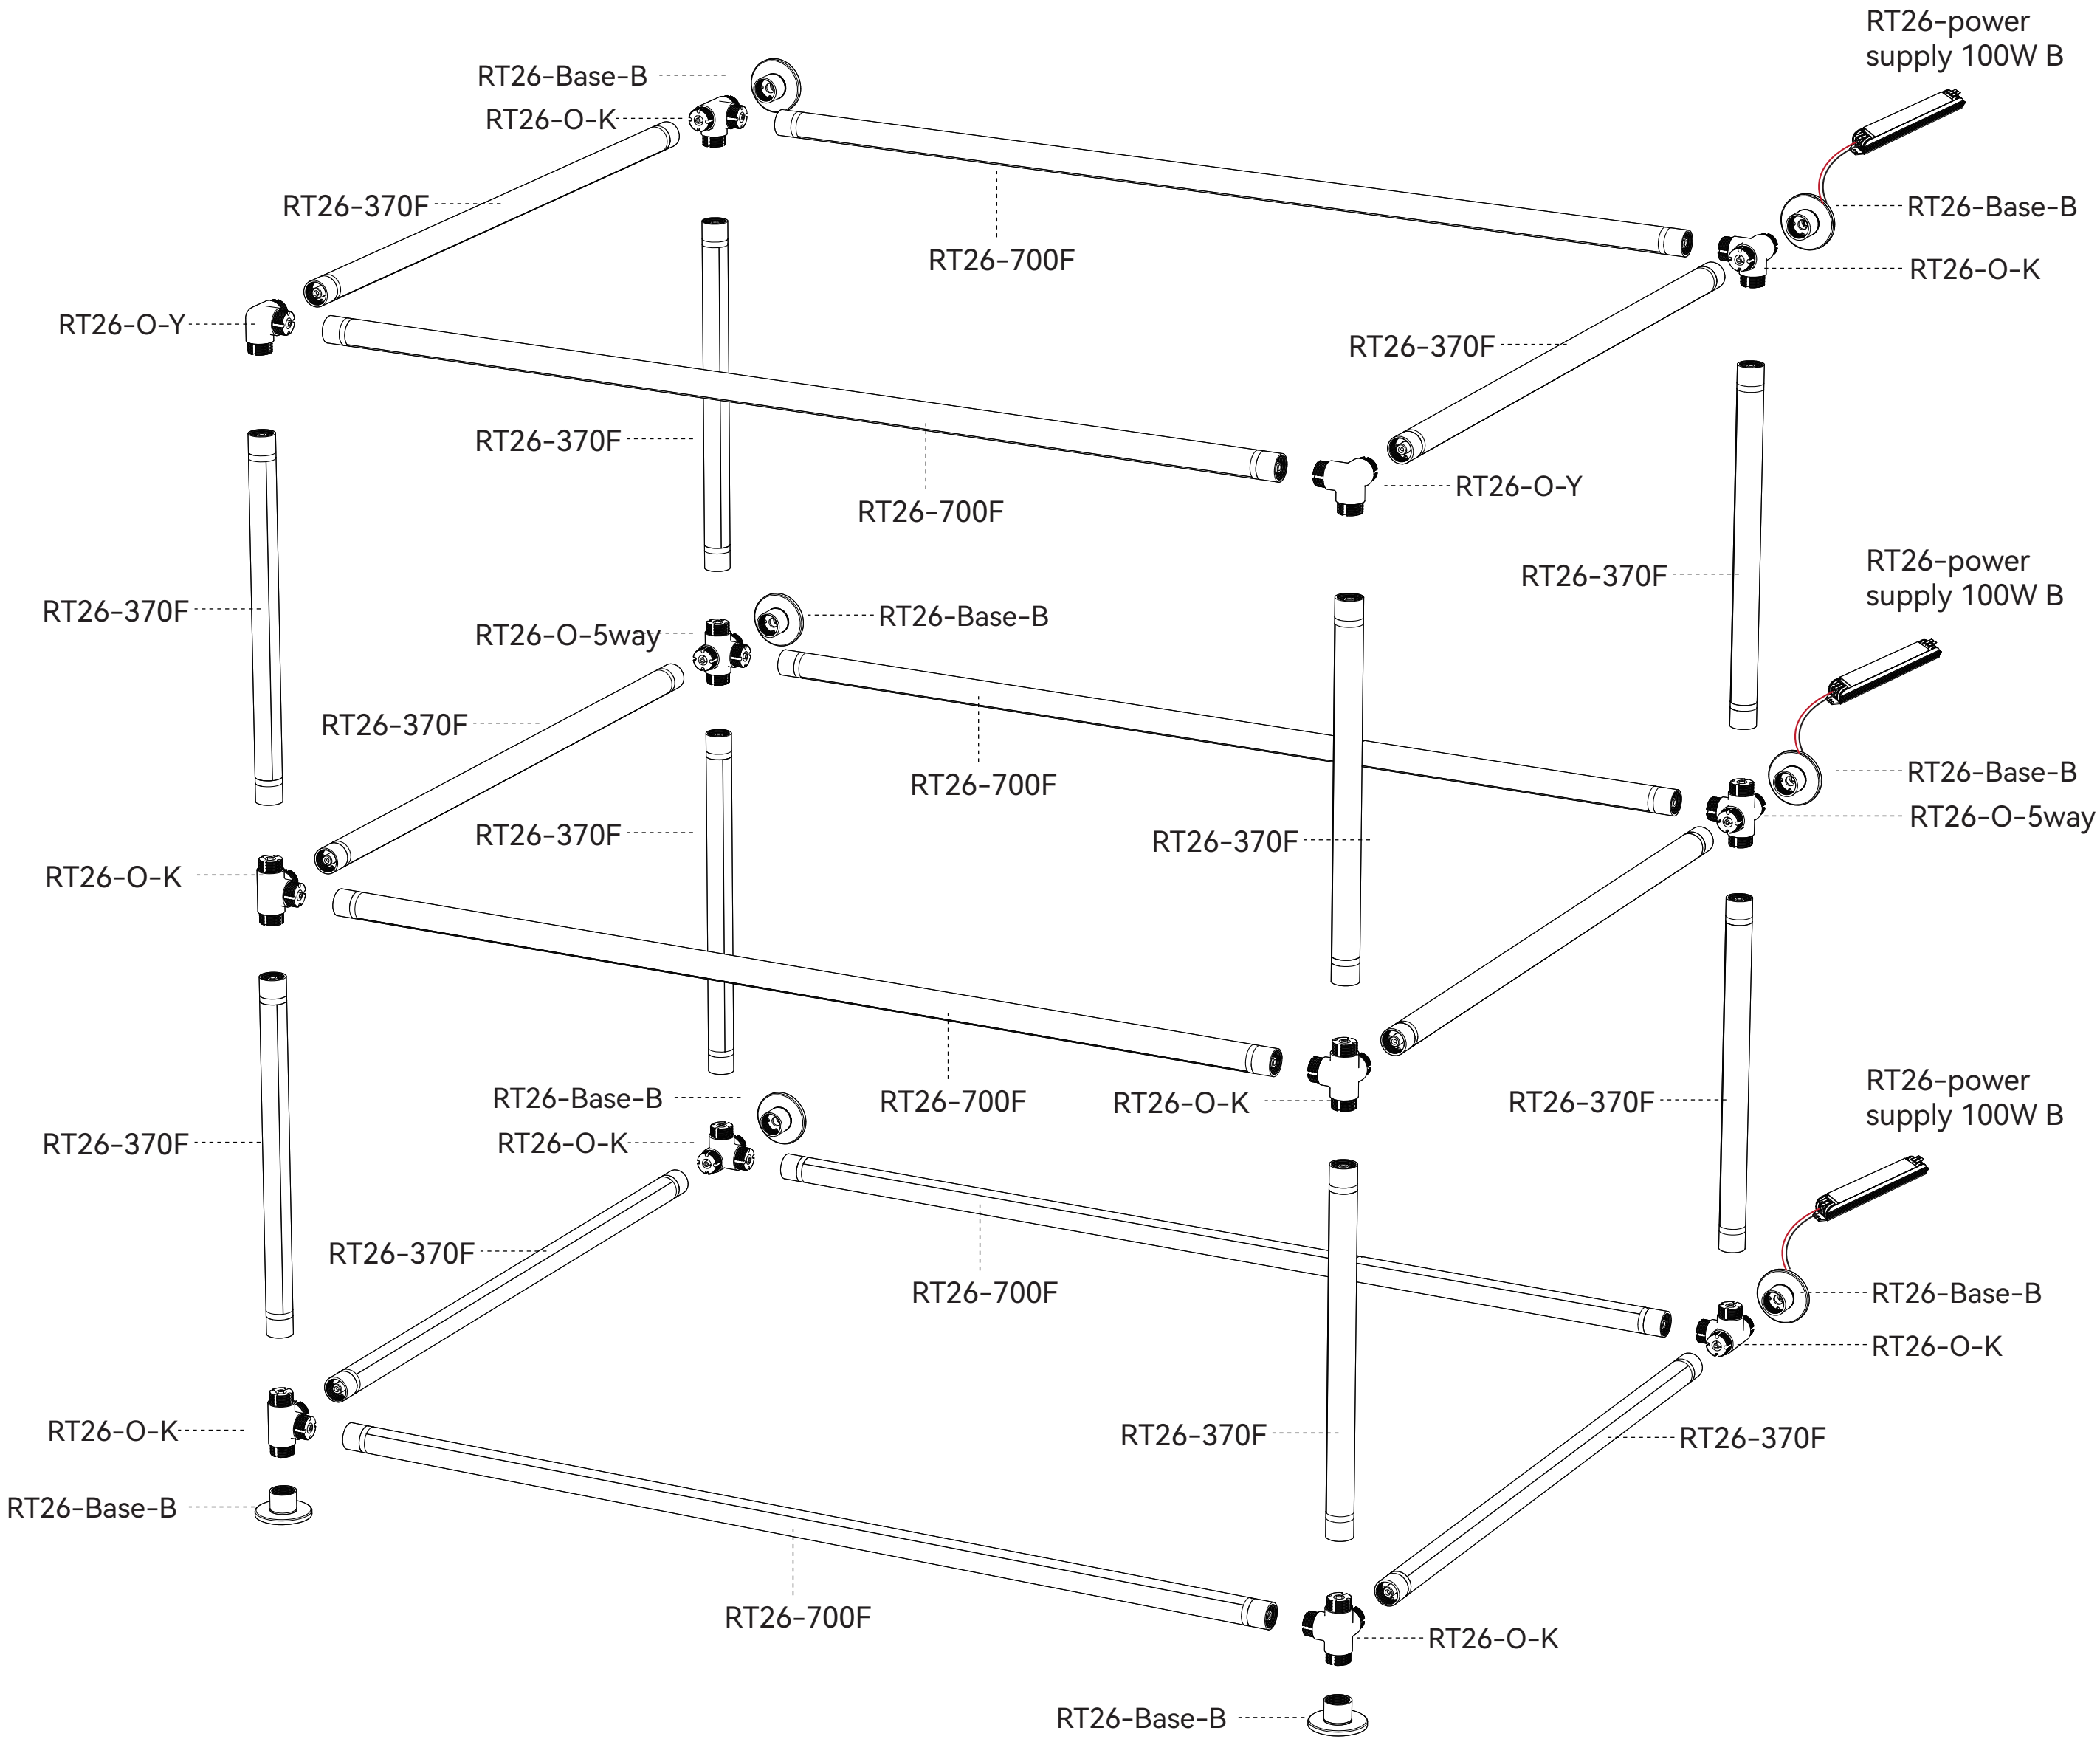


Assembly method

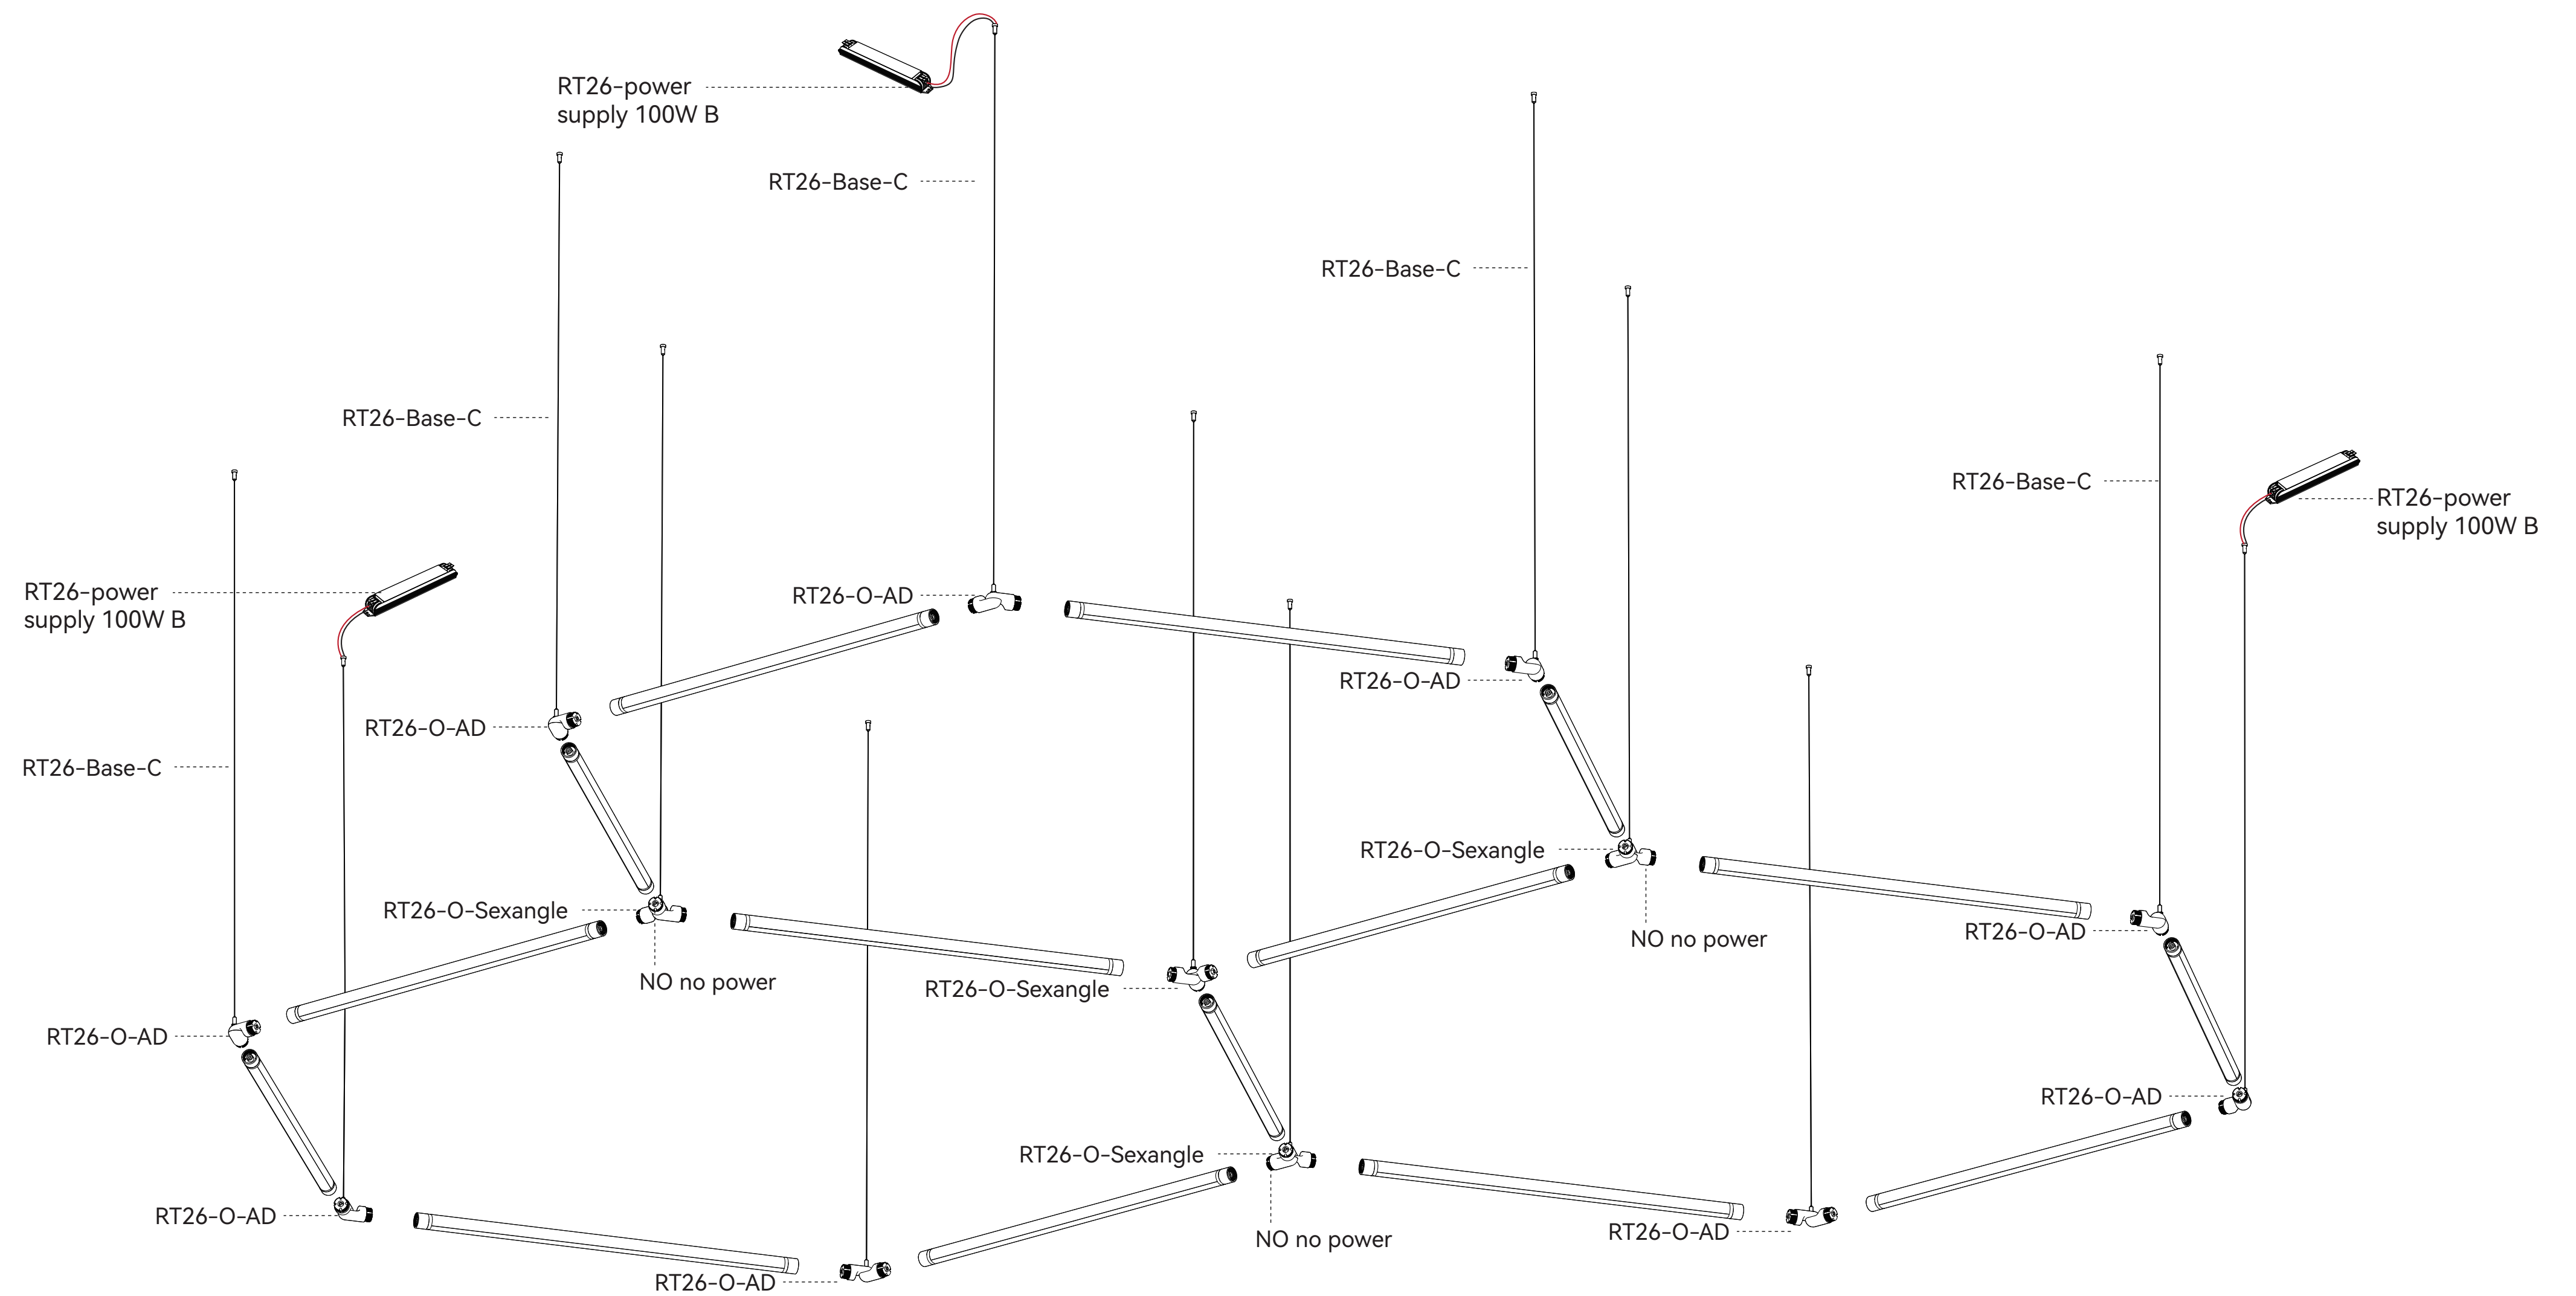


RT26 System


System Assembly

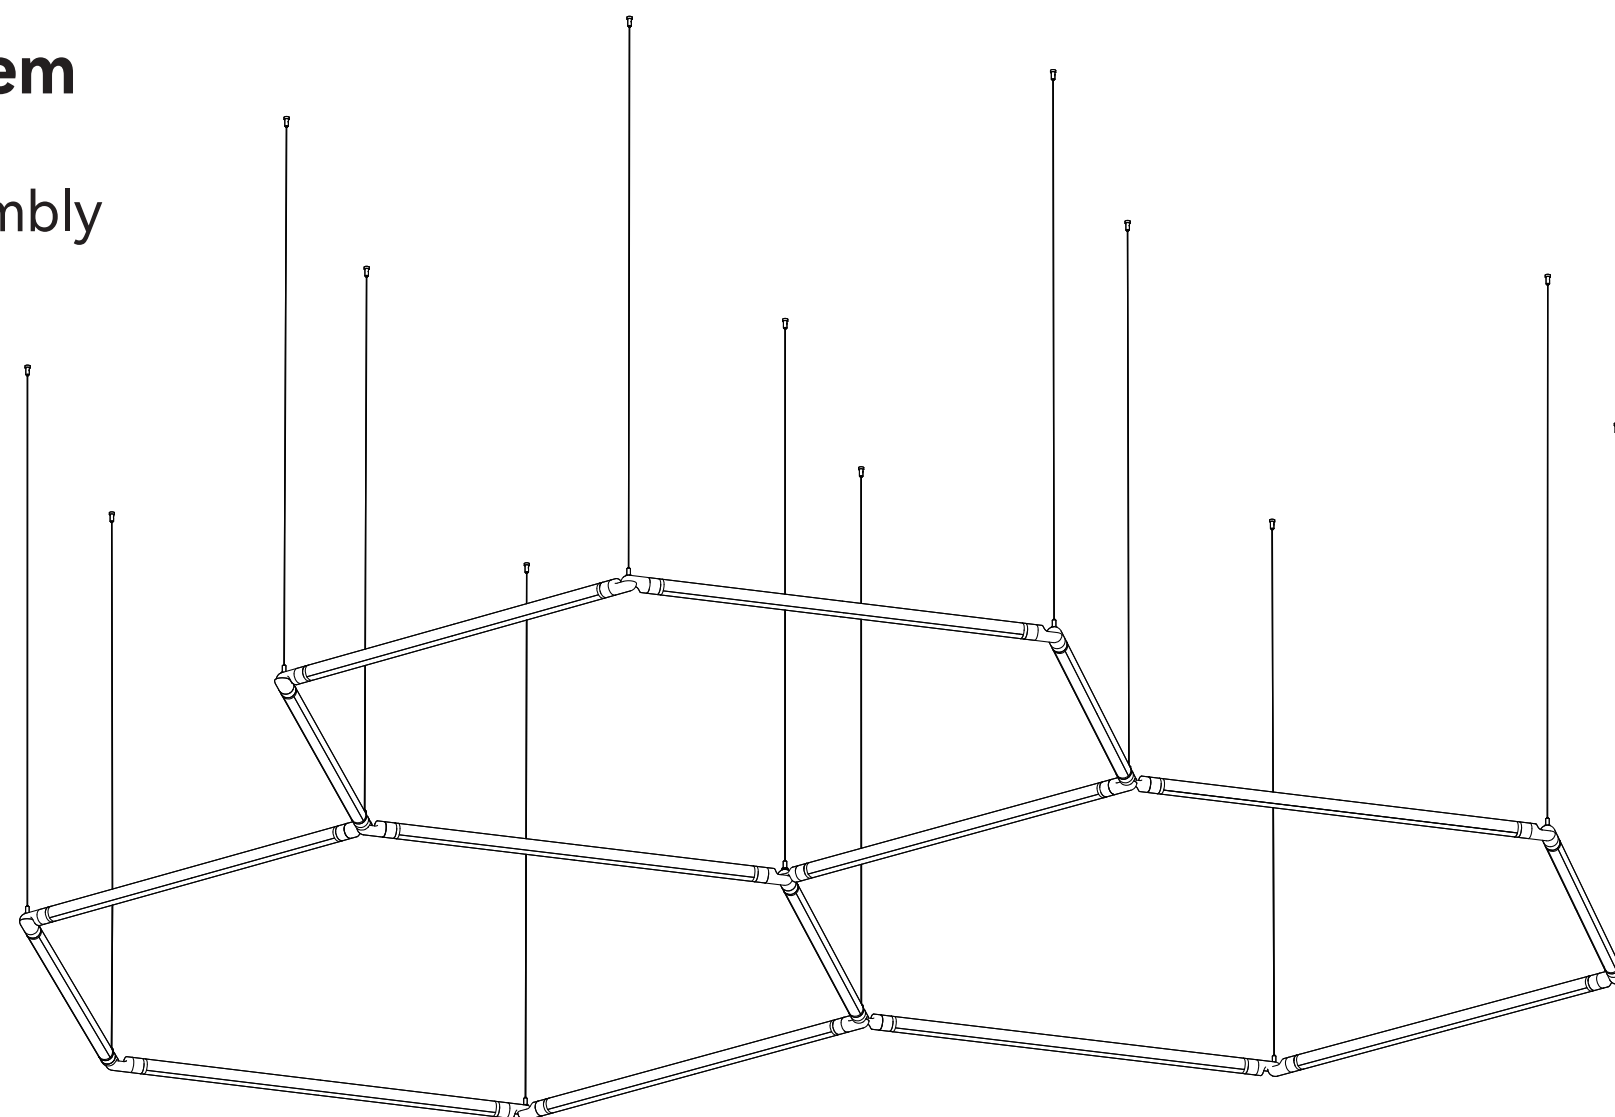


Parts list




RT26-power supply 100W B x3




RT26-O-AD x9



RT26-O-Sexangle **×4**




RT26-Base-C x13






RT26-700F **x15**

Assembly method

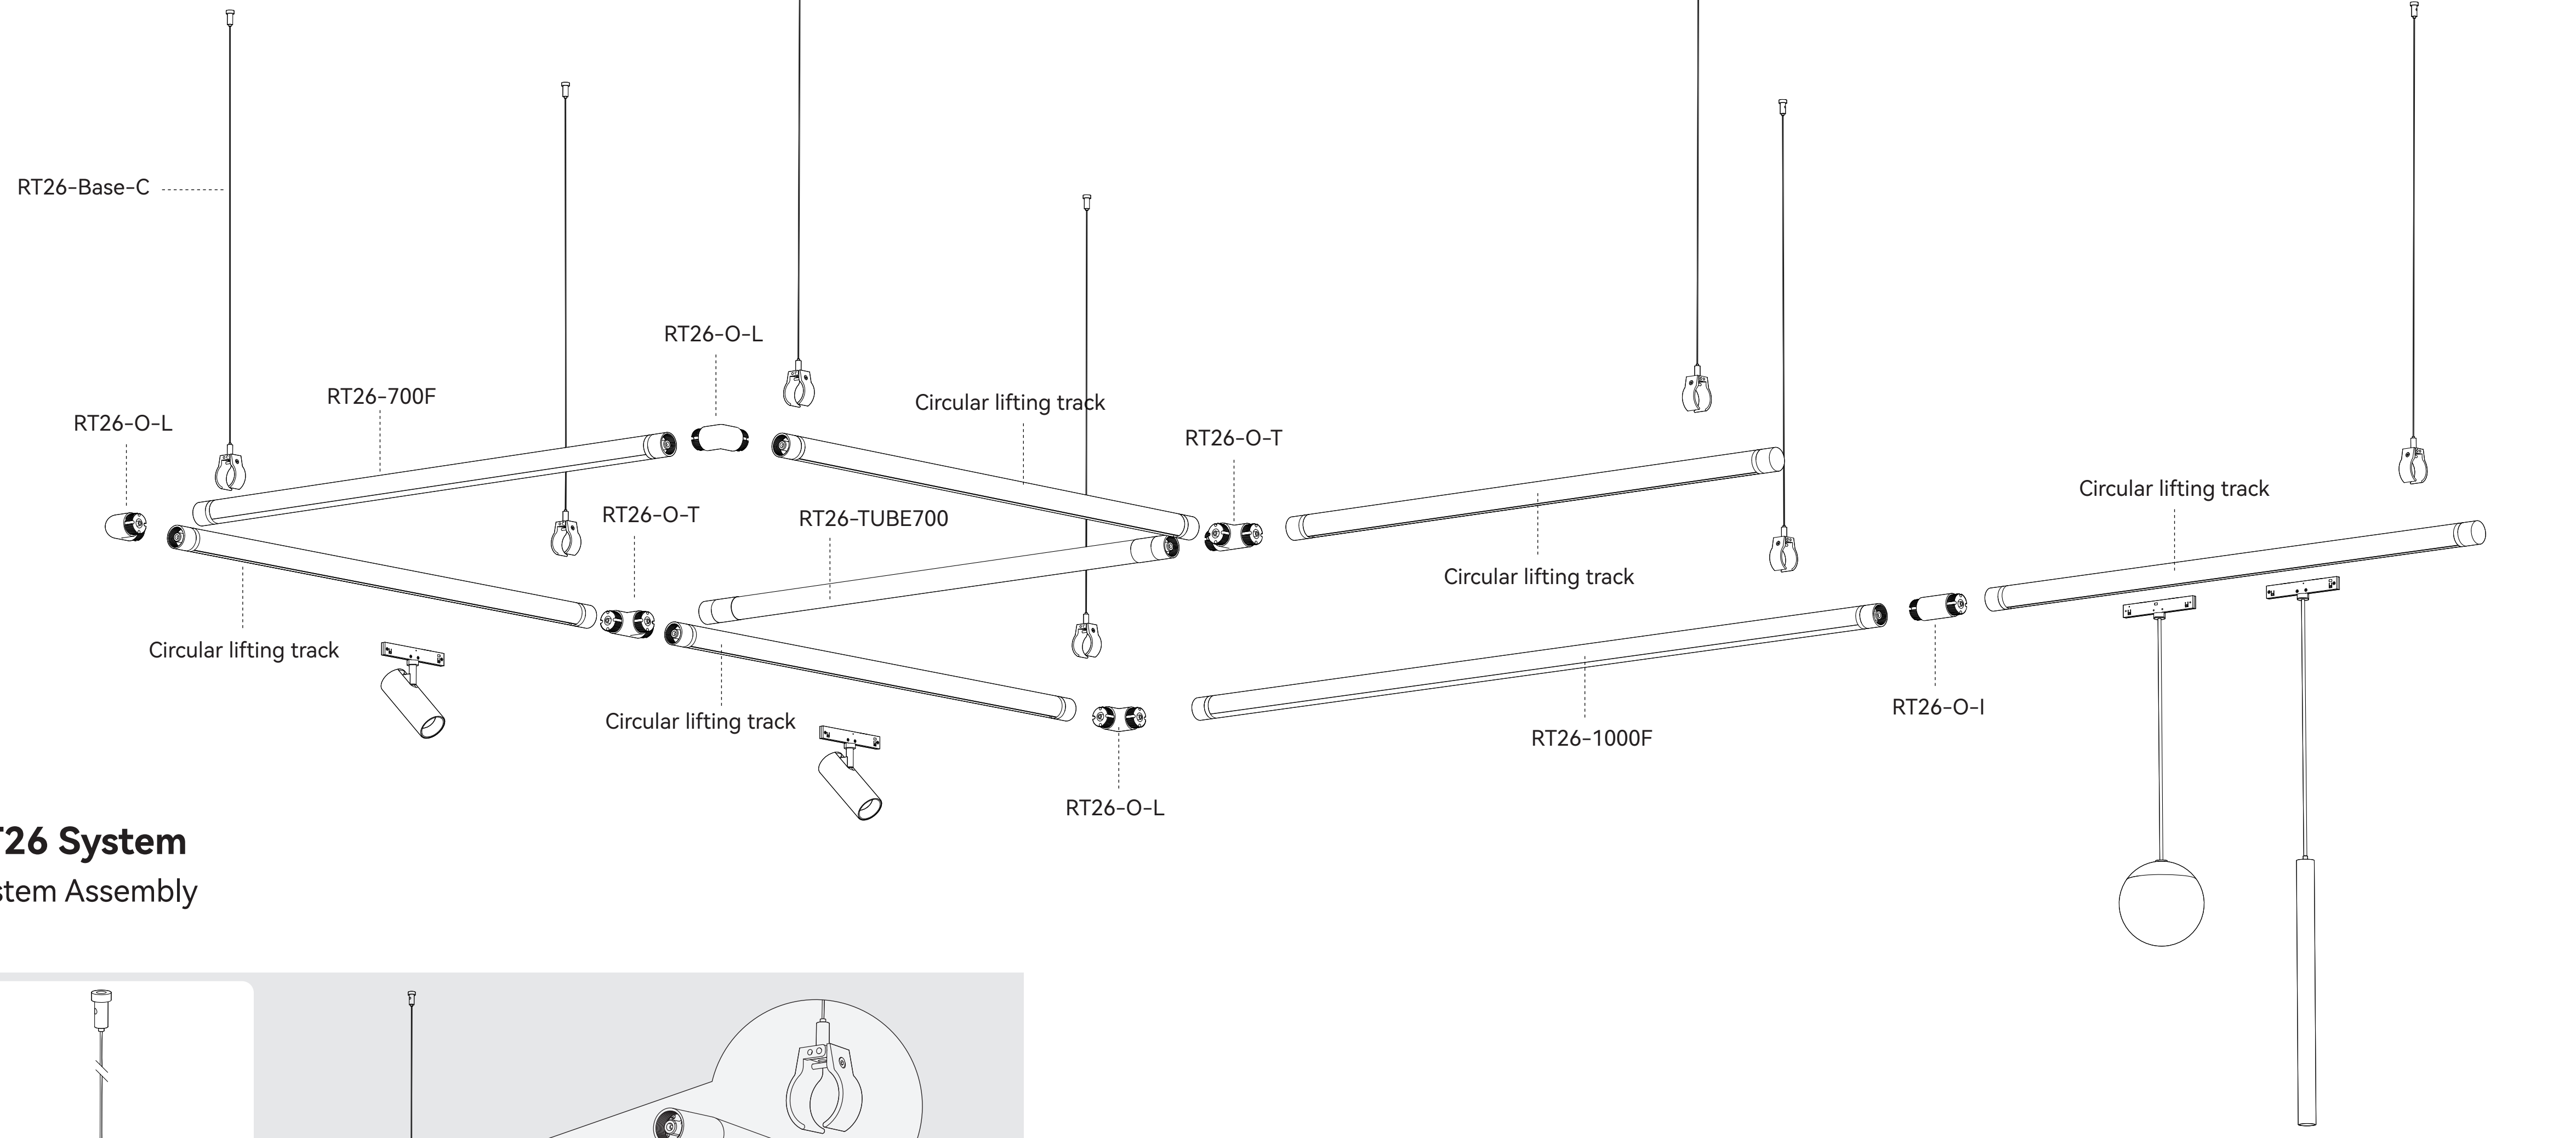


RT26 System

System Assembly





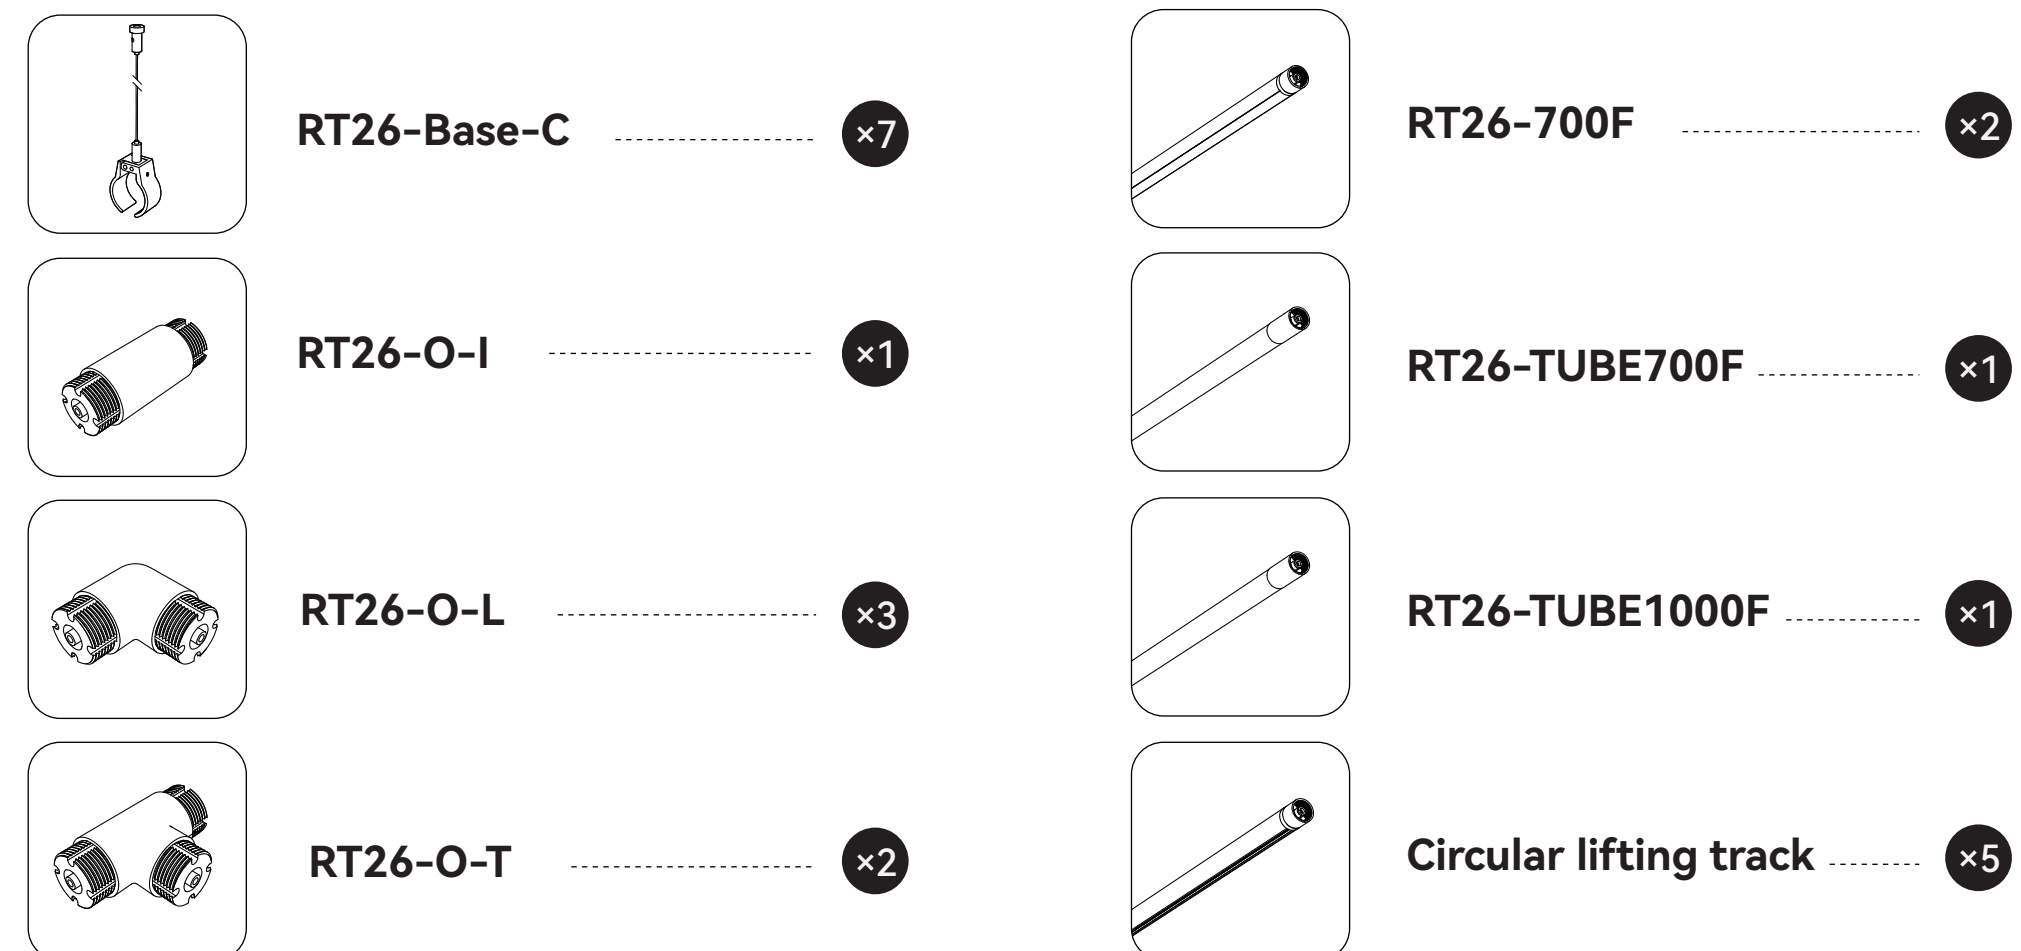
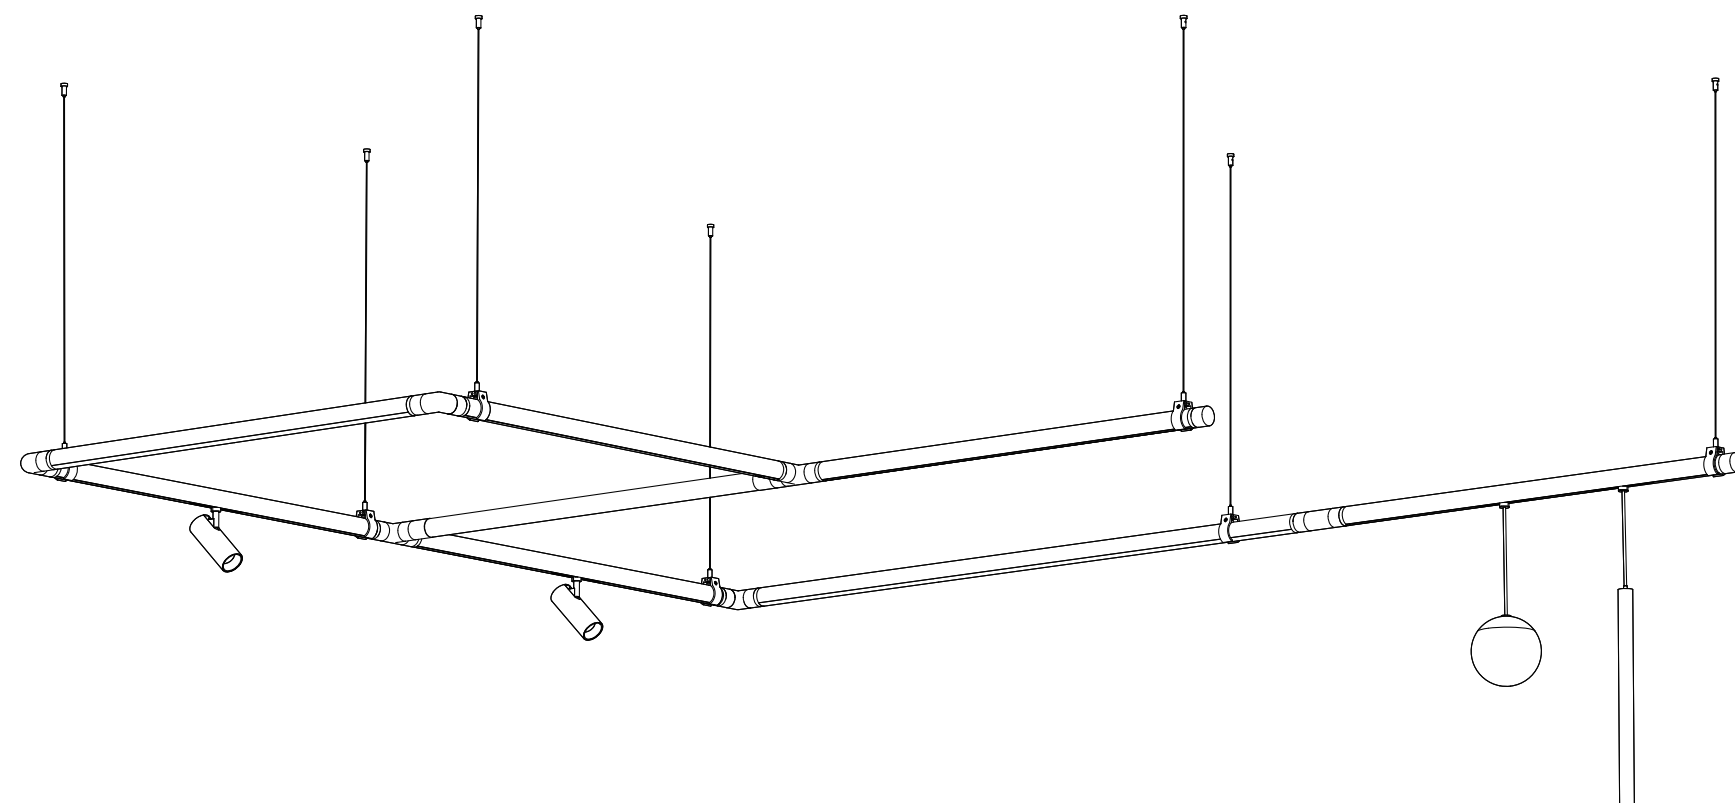
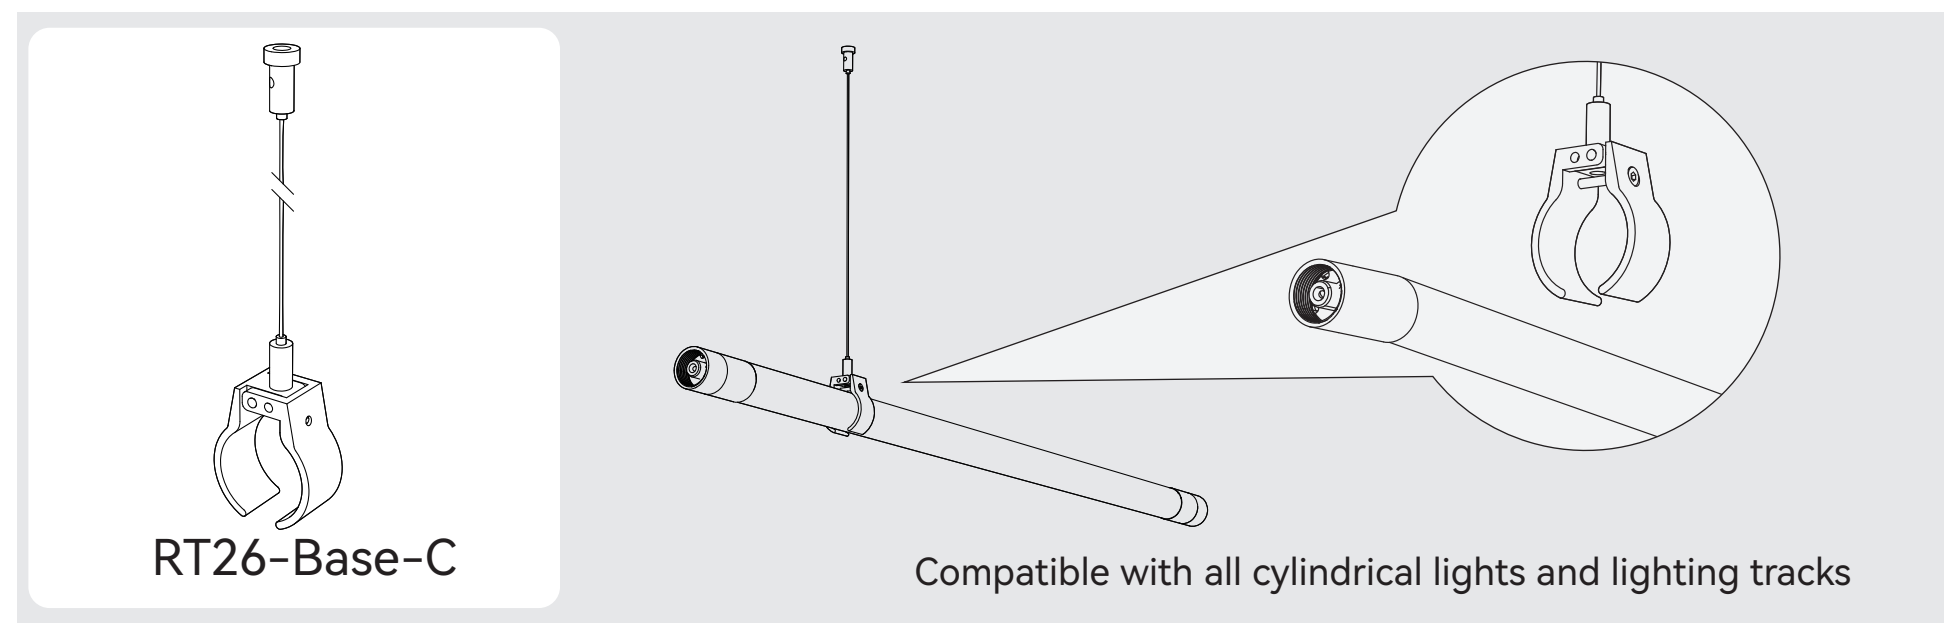


RT26 System

System Assembly

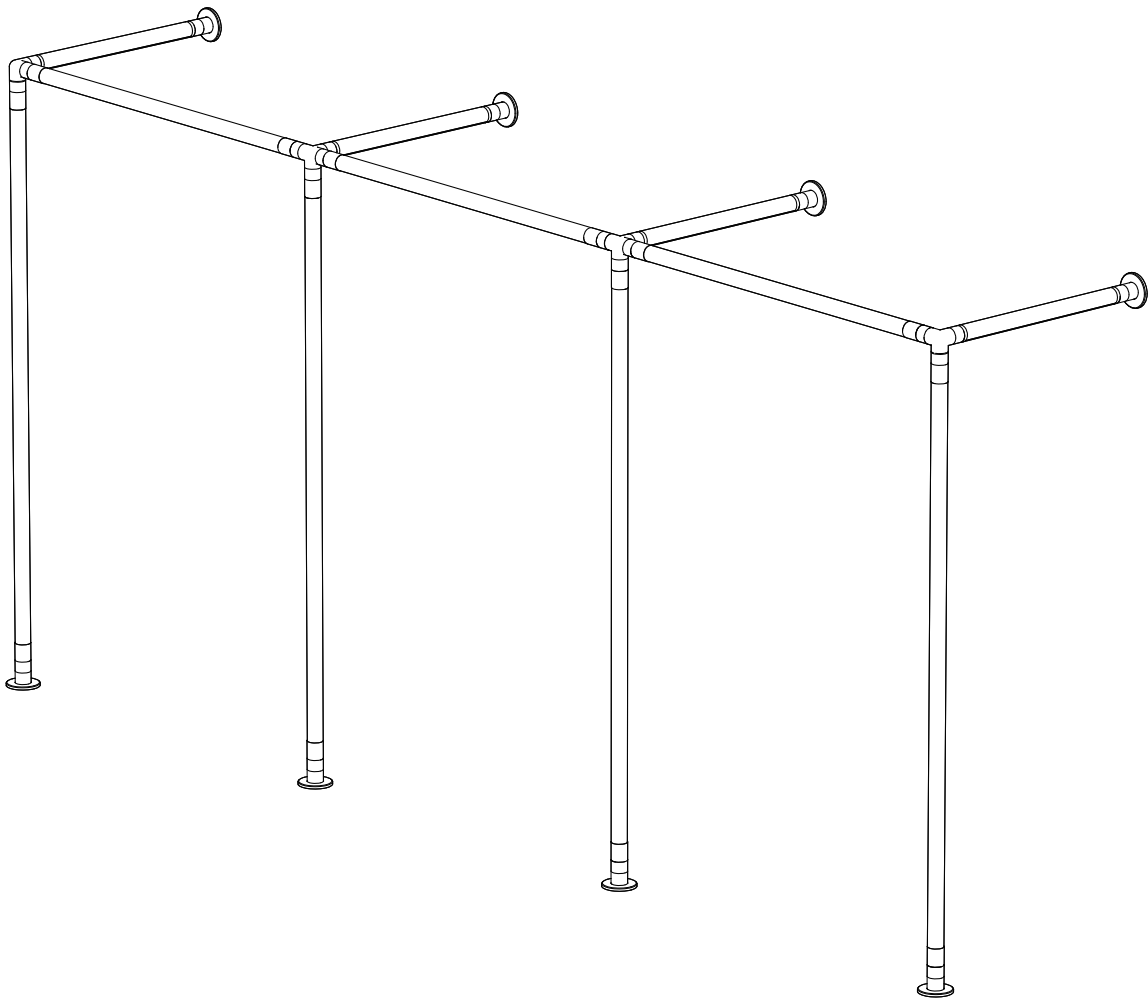


Parts list

	RT26-power supply 100W B	×2
	RT26-Base-A	×8
	RT26-O-Y	×2
	RT26-O-K	×2
	RT26-370F	×4
	RT26-700F	×3
	RT26-1000F	×4











Assembly method

The power supply should be positioned in the middle of the system.

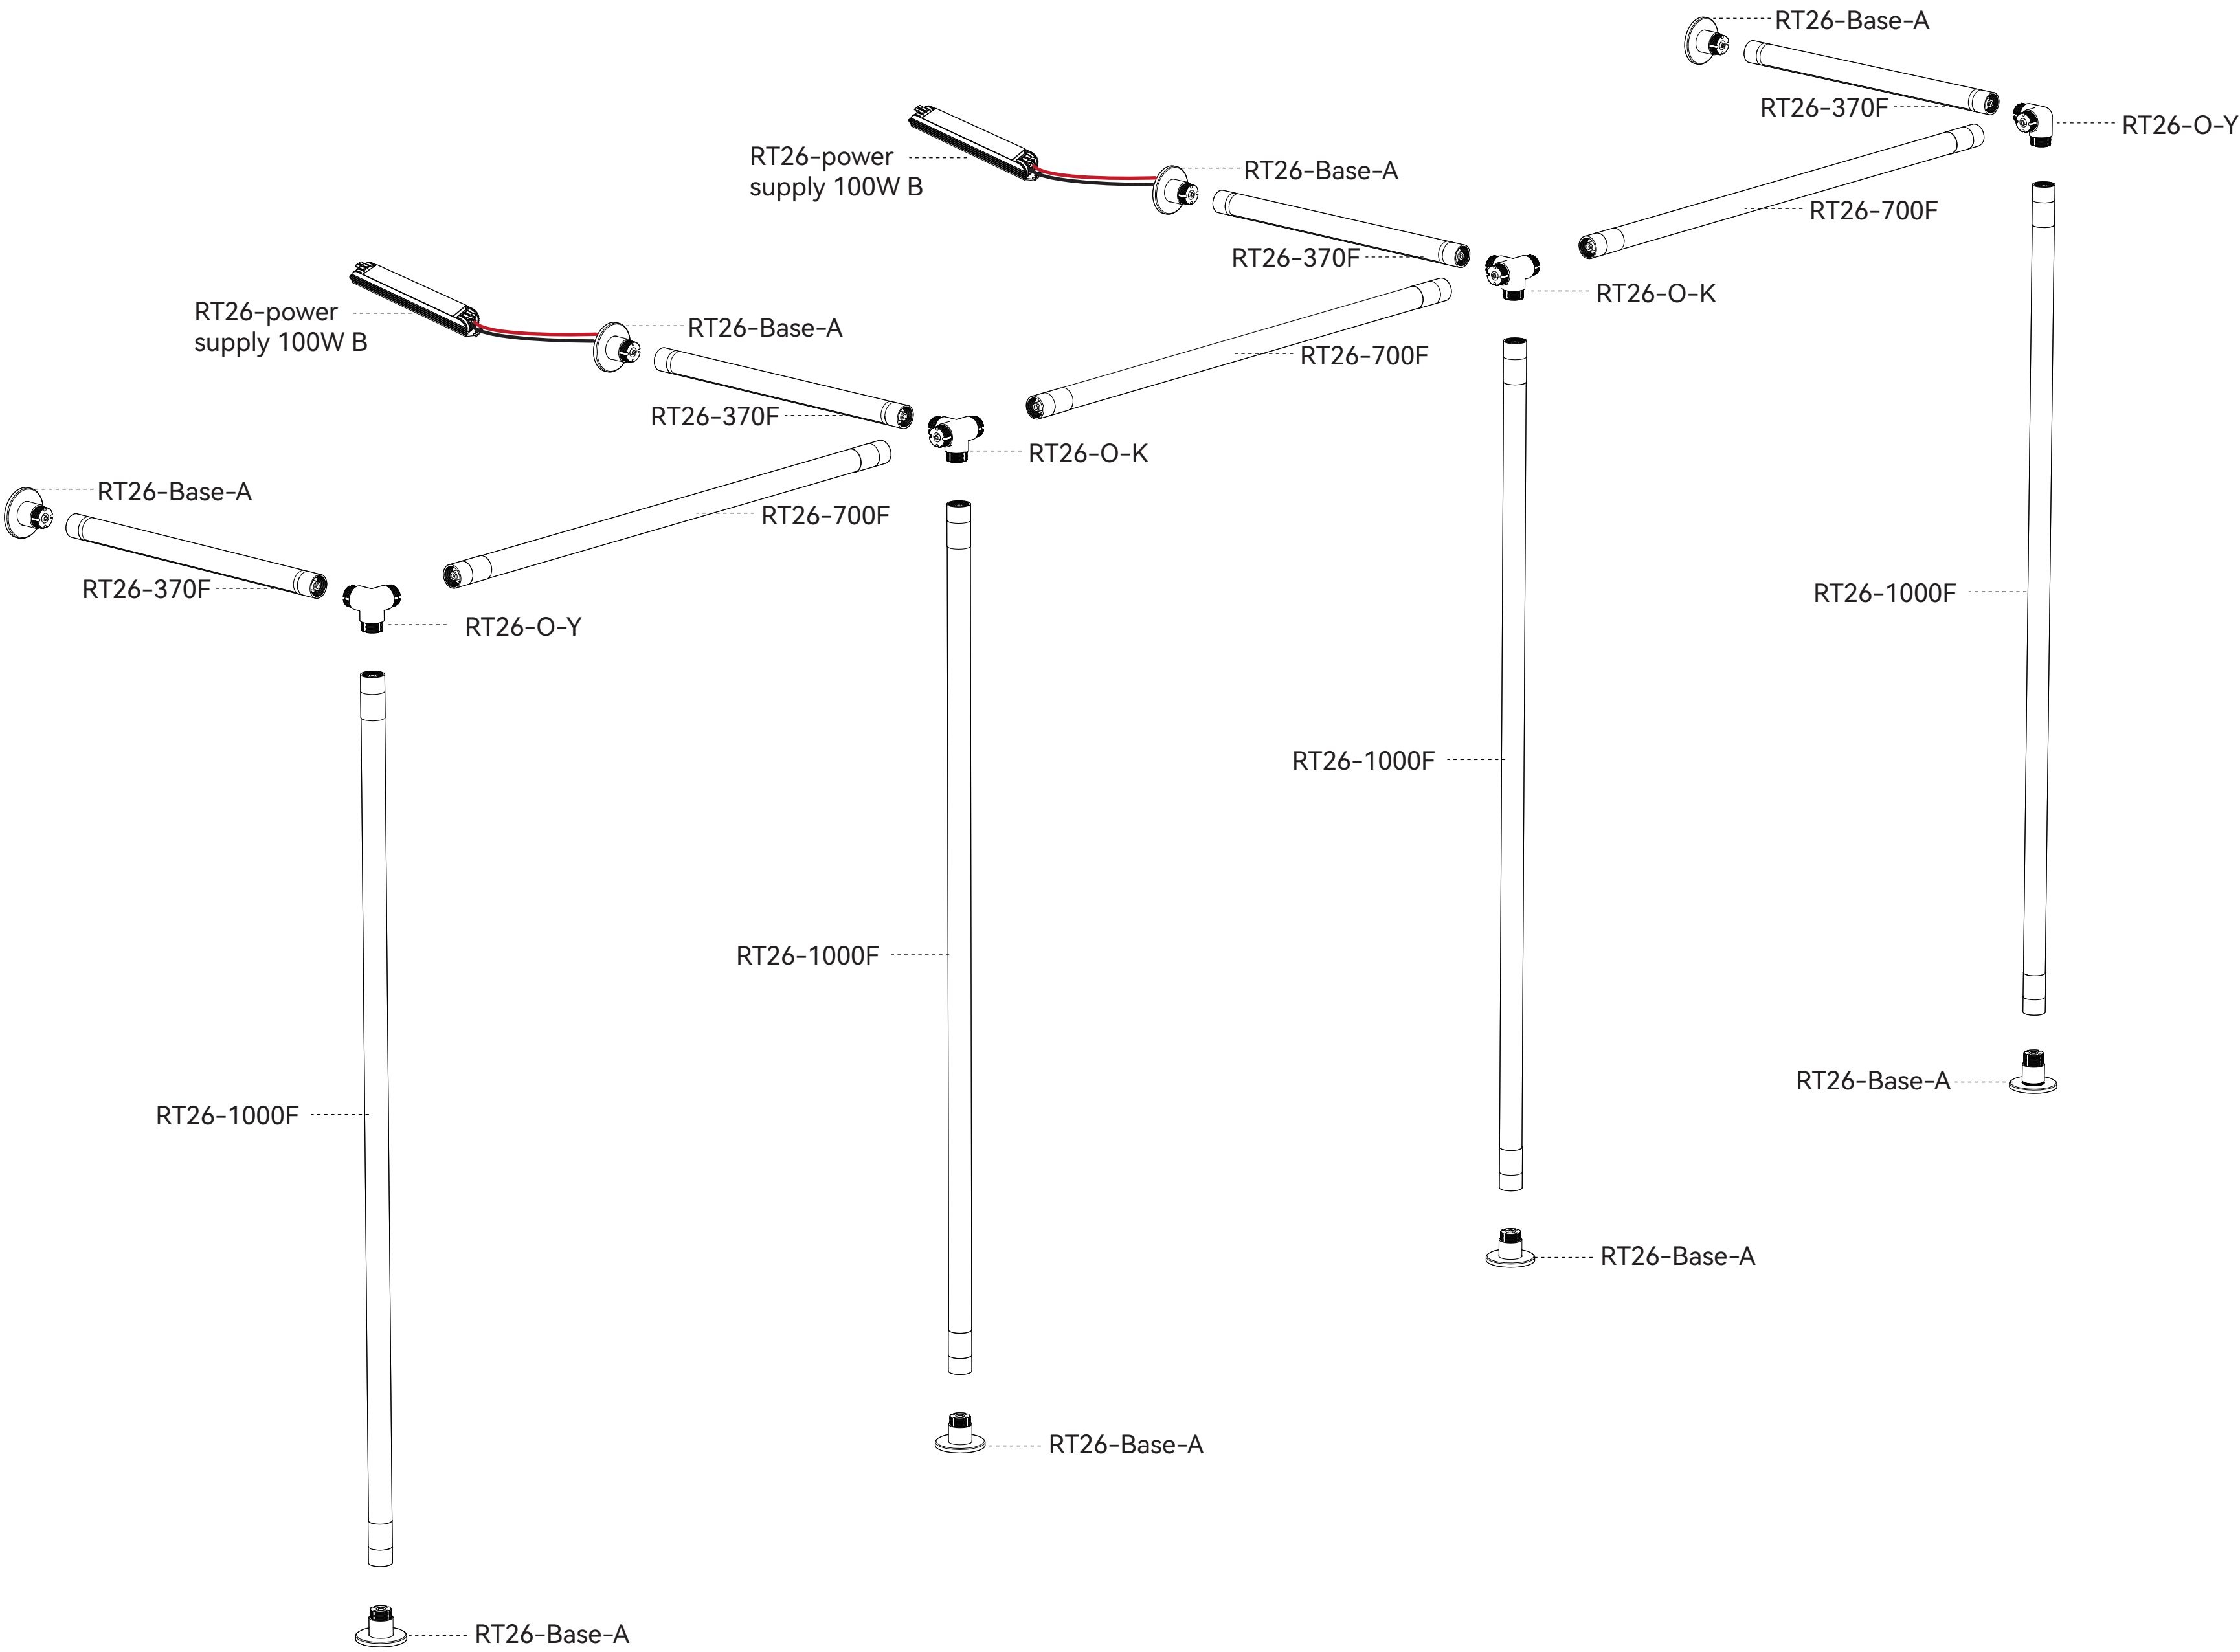


RT26 System

Parts list

	RT26-power supply 100W B	×8
	RT26-Base-A	×8
	RT26-Base-B	×8
	RT26-O-K	×28
	RT26-O-5way	×6
	RT26-370F	×39
	RT26-700F	×22
	RT26-TUBE700	×4
	RT26-ALfitting-279	×6
	RT26-O-I	×4

System Assembly

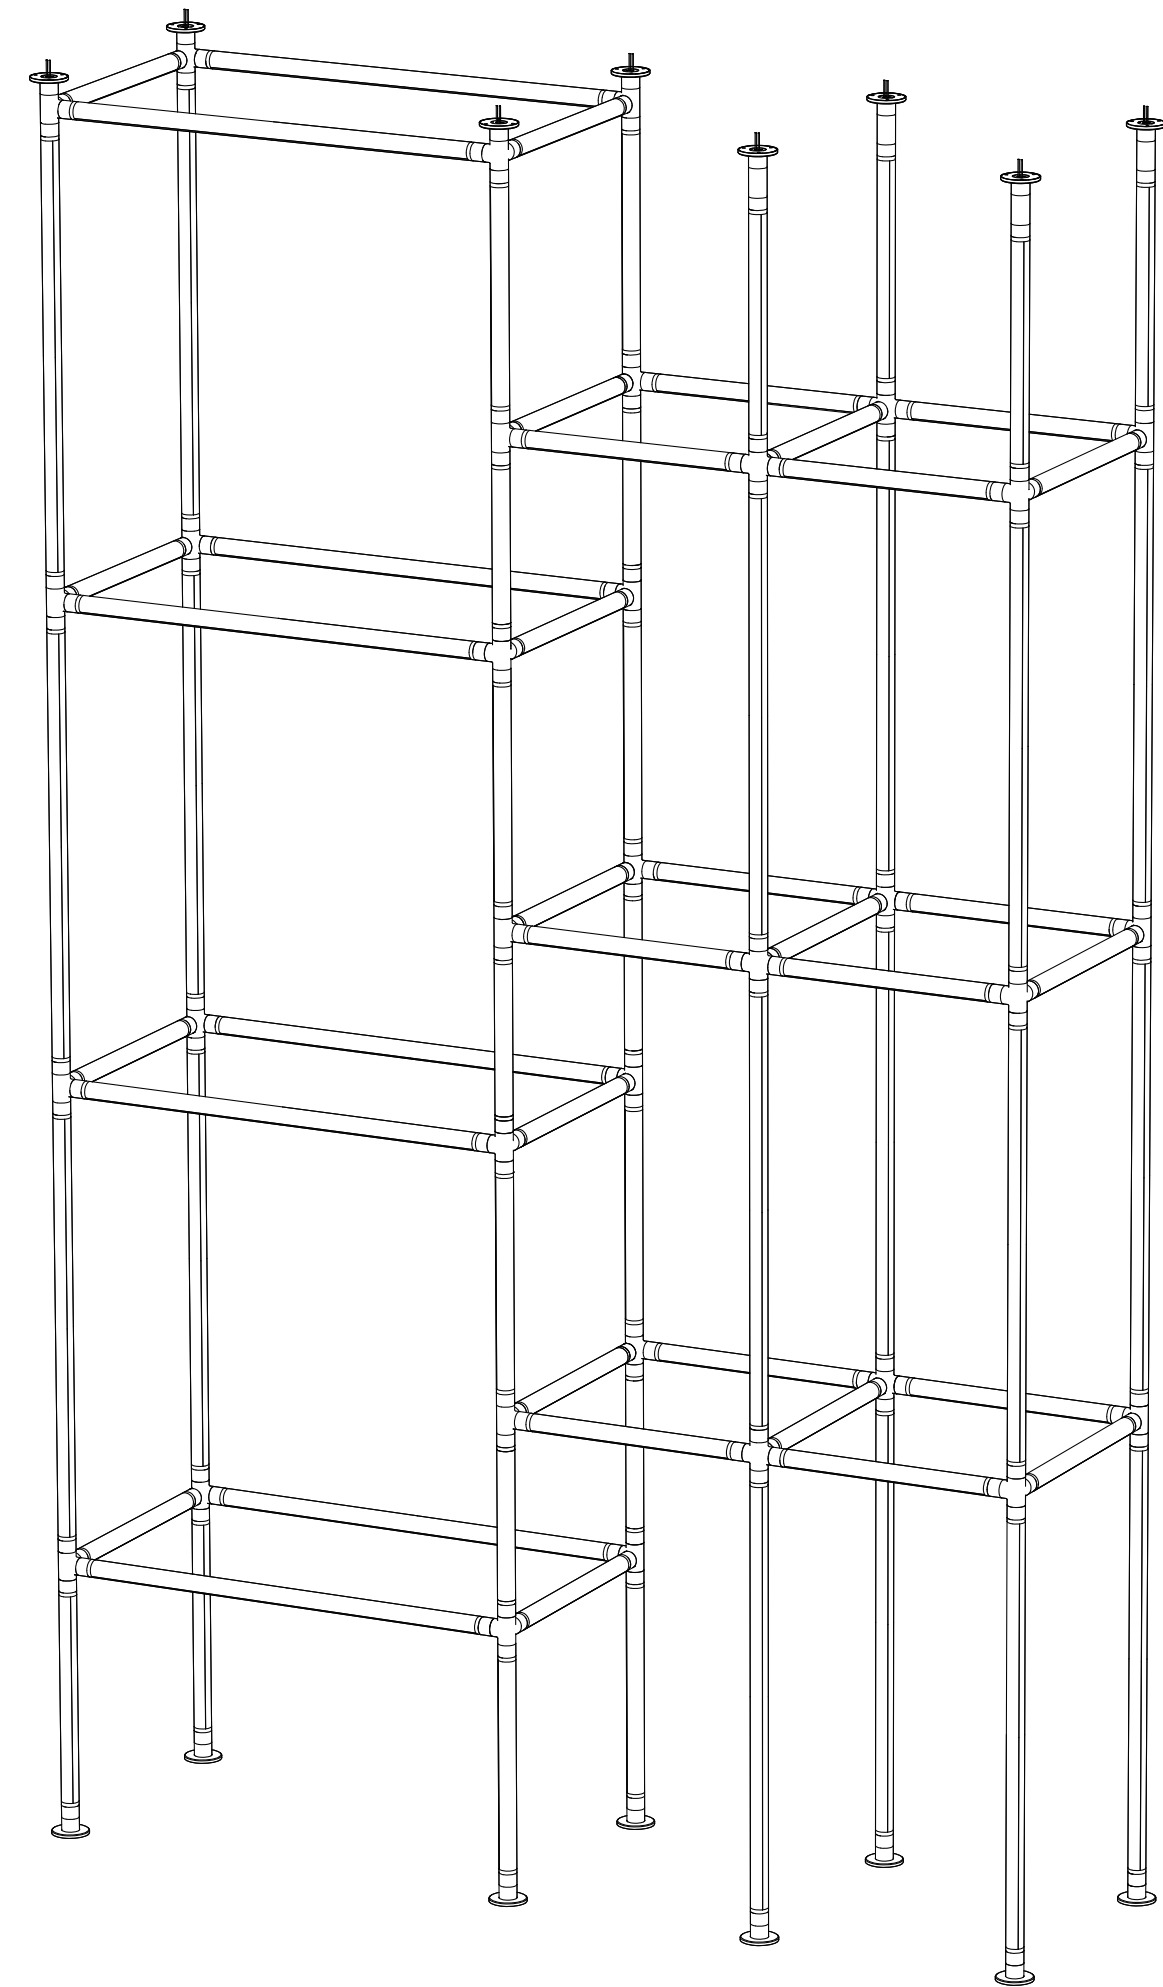

Assembly method

