


INTERIOR LED RECESSED DOWN SPOTLIGHT

L02085

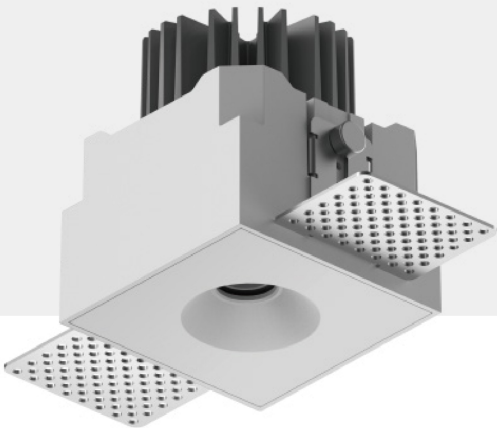

- IP20
- CLASS III
- Pinhole Spotlight | Fixed Trimless
- ECO Energy Saving
- Flicker Free
- Eyes friendly CE certificate RoHS standard
- CRI90+ CREE branded COB LED
- Europe Standard & CE Certificate.
- 400-600mm cable with quick connector
- DALI 2 | CASAMBI | 0-10V

A single lighting solution with down spotlight



Code	System Power W	Output Lumen lm	Dimension mm	Cut Hole mm	Power Supply mA
L02085 -8	8W	400lm	□ 58x58xH83mm	□ 60x60mm	150mA
L02085 -12	12W	600lm	□ 78x78xH90mm	□ 80x80mm	300mA

FEATURES

L02085 is fixed flat pinhole trimless installation, aluminum die casting material and powder coating. Remote LED driver version. Up to 2 tpyes of output beams, The fixed flat pinhole downlights is developed for eyes friendly, emit light from a small pinhole controlled by an optical. Cut-off angle is set over 40°. The pinhole is designed to minimize glare. The edge part of the opening hole and the inside of the hole are finished in matt black. Details are designed to satisfy high grade requirements. Sense of unity with the ceiling. Since light comes through a small pinhole on the flat frame plate, a sense of unity is realized on the ceiling surface. Minimizes the conspicuousness of the fixture and deliver an impressive lighting effect. The basic model comes in white and black colors. Customized color finishing, power changes are possible depending on the request and the quantity. CREE branded LED chips CRI90+ 2steps. Smart lighting, achieved CASAMBI | DALI 2. Easy lighting demand, for a wide scala of projects, from hotels, retail , commercial areas and much more. The spotlight is presented to its customers as a clean and non-dazzling product.

Remote LED Driver	Accessoires	Beam Angle	Color Temperature	Finishes
8W 150mA 12W 300mA		☀ 24° ☀ 36°	☀ 2700K ☀ 3000K ☀ 4000K ☀ 5000K ☀ 6000K	■ Black □ White Customized